




Part no. : 332

Wall mounted inlet

Cable entry facility also from the rear by use knock outs.

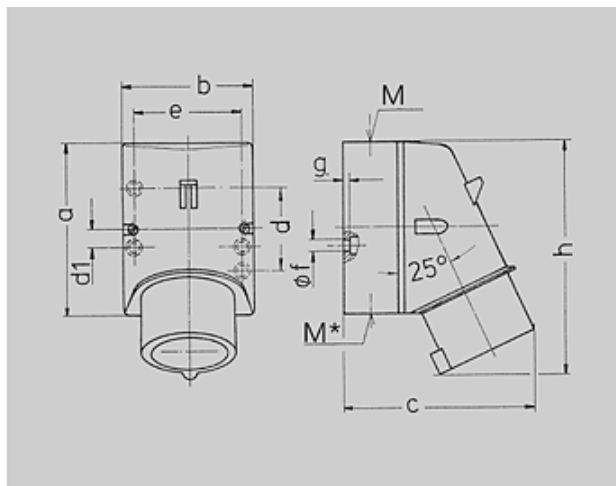

Drawing	Amp.	16			32		
		Poles			Poles		
2 MB 32		3	4	5	3	4	5
Dim. in mm	a	87	100	100	128	128	128
	b	64	75	75	84	84	84
	c	93	106	110	133	133	135
	d	40	—	—	—	—	—
	d1	—	10,5	10,5	11	11	11
	e	50,5	59	59	68	68	68
	f	4,5	5	5	5,3	5,3	5,3
	g	4	4	4	4	4	4
	h	122	133	135	169	169	170
	M	20	20	20	25	25	32
Max. cabel diam. (mm)		13	18	18	25	25	25
Terminal for cond. cross section (mm²) min.-max.		—1 —2,5	—1 —2,5	—1 —2,5	—2,5 —6	—2,5 —6	—2,5 —6

Article-group : **2045**

voltages : 230V

rated current : 16A

pole : 3 pole

IP protection types : IP44

position of ground contact : 6h

packing unit : 0010

weight : 150 g

PART NUMBERS

		V	110V	230V	400V	500V	>50-500V	
		Hz	50,60	50,60	50,60	50,60	100-300	300-500
		colour						
		amp.						
16 A	3	331	332	333				
	4	334	335	336	337	921	922	
	5	340	341	342	2359	2668	2400	
32 A	3	343	344	345				
	4	346	347	348	349			
	5	352	353	354	2386			