




Part no. : 1140A

Receptacle

internal fixing, 1 cable entry at top and two blind cable entries (can be cut out) at bottom, enclosure can be turned 180°, with 6 blind holes for mounting special terminals if required

Sleeves: SoftCONTACT

Contact carrier: Highly heat resistant

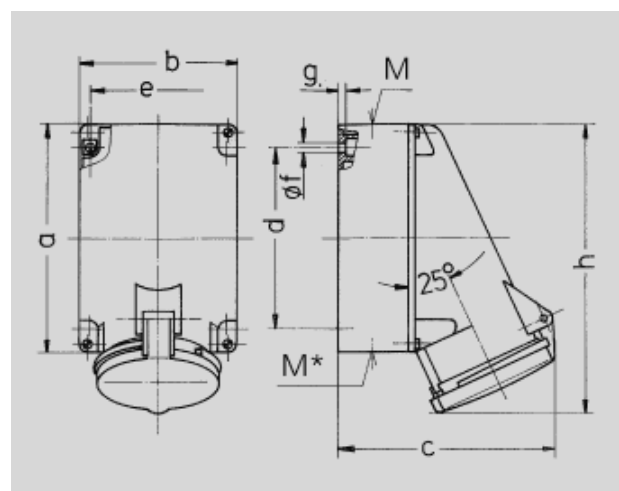

Drawing	Amp.	63		
1 MB 213	Poles	3	4	5
Dim. in mm	a	170	170	170
	b	118	118	118
	c	164	164	164
	d	134,5	134,5	134,5
	e	103	103	103
	f	6,1	6,1	6,1
	g	6	6	6
	h	216	216	216
	M	40	40	40
	M*	2xM40 (blind) to be cut out		
Max. cable diam. (mm)		32	32	32
Terminal for cond. cross section (mm²) min.-max.		6 —25	6 —25	6 —25

Article-group : **1041**

voltages : 230V

rated current : 63A

pole : 4 pole

IP protection types : IP44

position of ground contact : 9h

packing unit : 0010

weight : 880 g

PART NUMBERS

V	110V	230V	400V	500V	>50-500V	
Hz	50,60	50,60	50,60	50,60	100-300	300-500
colour						
amp.						
63 A	3	1136A	1137A			
	4	1140A	1141A	1142A		
	5		1145A			