


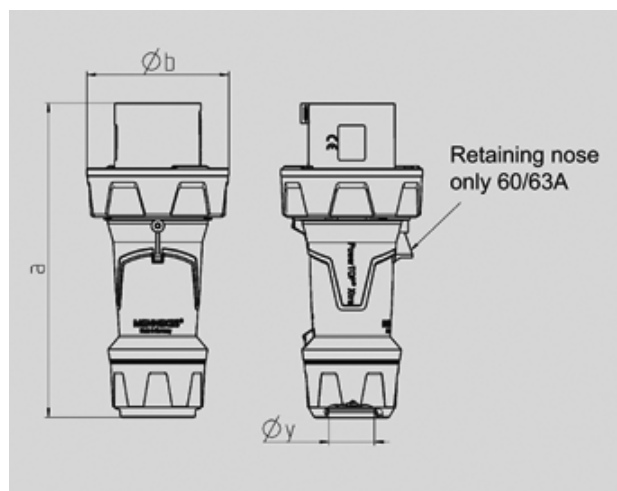

Part no. : 13218

Plug PowerTOP Xtra

rubberised handle area,
highly heat-resistant contact carrier, frame terminals, nickel-plated contacts, cable gland and sealing, strain relief and protection against kinking, enclosure with thread lock, two safety slides


Drawing 2 MB 225	Amp. Poles	63			125		
		3	4	5	3	4	5
Dim. in mm	a	250	250	250	290	290	290
	b	114	114	114	130	130	130
	y	36	36	36	49	49	49
Terminal for cond. cross		6	6	6	25	25	25
section (mm²) min.-max.		—16	—16	—16	—50	—50	—50

Article-group : **2216**

voltages : 230V

rated current : 125A

pole : 4 pole

IP protection types : 67

position of ground contact : 9h

weight : 1404

PART NUMBERS

	V	110V	230V	400V	500V	>50-500V	
	Hz	50,60	50,60	50,60	50,60	100-300	300-500
	colour						
	amp.						
63 A	3	13201	13202	13203			
	4	13204	13205	13206	13207	13208	13209
	5	13210	13211	13212	13213		13214
125 A	3	13215	13216				
	4	13217	13218	13219	13220		
	5	13223	13224	13225	13226		13227