


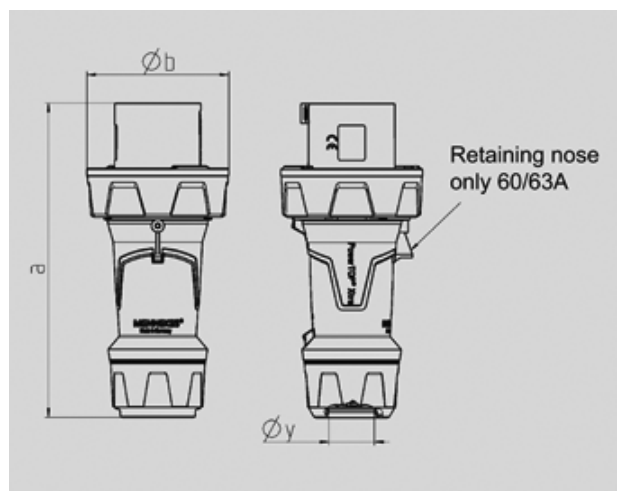

Part no. : 13219

Plug PowerTOP Xtra

rubberised handle area,
highly heat-resistant contact carrier, frame terminals, nickel-plated contacts, cable gland and sealing, strain relief and protection against kinking, enclosure with thread lock, two safety slides


Drawing 2 MB 225	Amp. Poles	63			125		
		3	4	5	3	4	5
Dim. in mm	a	250	250	250	290	290	290
	b	114	114	114	130	130	130
	y	36	36	36	49	49	49
Terminal for cond. cross		6	6	6	25	25	25
section (mm²) min.-max.		—16	—16	—16	—50	—50	—50

Article-group : **2216**

voltages : 400V

rated current : 125A

pole : 4 pole

IP protection types : 67

position of ground contact : 6h

weight : 1400

PART NUMBERS

V	110V	230V	400V	500V	>50-500V	
Hz	50,60	50,60	50,60	50,60	100-300	300-500
colour						
amp.						
63 A	3	13201	13202	13203		
	4	13204	13205	13206	13207	13208
	5	13210	13211	13212	13213	13214
125 A	3	13215	13216			
	4	13217	13218	13219	13220	
	5	13223	13224	13225	13226	13227