


FDV DOKUMENT




Bulkhead 18W Hvit 32 416 08 / 261824

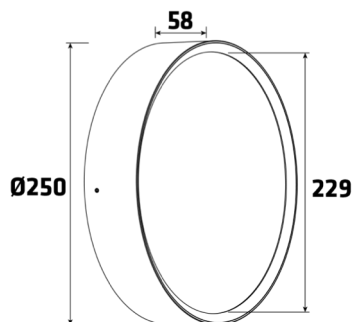

Art nr	El nr	Produktnavn	Å	Lysytelse	DIM	System eff	CRI	Lys farge	IP	Farge
261824	32 416 08	Bulkhead 18W	110°	1542 lm	Triac	18W	>80	3000K	65	Hvit

Tekniske data:	16W (System effekt 18W)
Spennings:	200-240VAC 50/60Hz
LED Chip	Epistar SMD
Lysytelse:	1542 lm
Lysfarge:	3000K
CRI/Ra:	>80
Strålingsvinkel:	110°
Utbyttbar LED:	Nei
Driftsstrøm:	230mA konstantstrøm
Dimming:	Triac DIM
Sertifisert:	CE
Omgivelsestemp:	-20°C +45°C
Materiale:	PC, aluminium
Farge:	Hvit (RAL 9016)
IP Klasse:	IP65
IK Klasse:	IK10
Isolasjonsklasse:	Klass I
Levetid:	50 000 L80
Produktstørrelse:	Ø250x229xW58mm
Vekt:	1,05 kgs
Antall per eske:	1stk Dimensjon: 275x275x280mm Vekt: 1,25 kgs
Antall per ytterkartong:	10stk Dimensjon: 590x425x295mm Vekt: 13,5 kgs

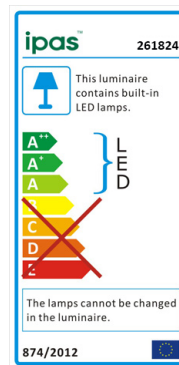

Rengjøring:

Planmessig rengjøring gir deg best belysning over tid.

Gjør anlegg alltid strømløst før rengjøring.

Det anbefales støvtørking med mikrofiber. Intervaller avhenger av bruksområdets støv-/smussmengde. Unngå sterke kjemikalier (pH>7) og vær varsom med frontlinse eller reflektor hvis denne er tilgjengelig. Ikke spray midler direkte på armatur. Særlig tilsmussede områder kan rengjøres med mildt såpevann, men prøv på et avgrenset område først. LED Driver eller åpne komponenter må ikke utsettes for vann eller fuktighet. GARANTI: IPAS yter 5 års garanti. Se også ASLEM12 for mer informasjon.

Resirkulering/WEEE:

Produktet er definert som miljøavfall og skal samles inn av et EE-returselskap. IPAS er medlem av Renas AS. Se mer på www.renas.no



IPAS AS



Østre Rosten 2A 7075 TILLER

www.ipas.no post@ipas.no Tlf 40 00 15 59

V.06.06.2019



Bulkhead 18W

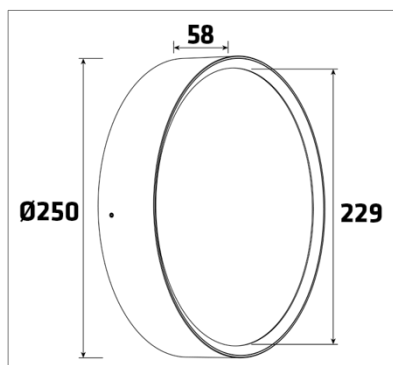

IMPORTANT INFORMATION:



1. Please read this instruction carefully before installation and keep it for future reference.
2. Please conform to the instruction of equipment and installed by professional.
3. Make sure correct voltage applied before use and keep away from heat and vibration source.
4. The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire shall be replaced.
5. The product is not suitable for any oil pollution ambient or related applications.
6. For indoor and outdoor use.

MAIN PARAMETER:

Product:	261805 Sort	261824 Hvit
Rated Voltage	AC 200-240V 50/60Hz	AC 200-240V 50/60Hz
LED watt	16W	16W
System eff	18W	18W
LED	Epistar SMD 2835 LED	Epistar SMD 2835 LED
LED Driver	230mA Constant Current	230mA Constant Current
Color Temperature	3000K	3000K
Protection	Class I	Class I
Beam Angle	110°	110°
IP Rated	IP65	IP65
Operation Temperature	-20°C<ta<45°C	-20°C<ta<45°C
Product Size:	Ø250mmxW58mm	Ø250mmxW58mm


INSTALLATION INSTRUCTIONS:

1. Always switch off the power supply before installation.
2. Make sure all parts are ready when open the box and prepare the installation tools the lighting needs.
3. Should be installed by qualified electricians.
4. If there is any damage on the housing or glass cover, should view it as disqualified product that cannot be used.

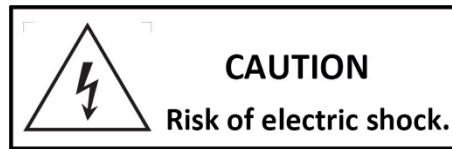


INSTALLATION STEPS:


1. Select the required position for the luminaire.

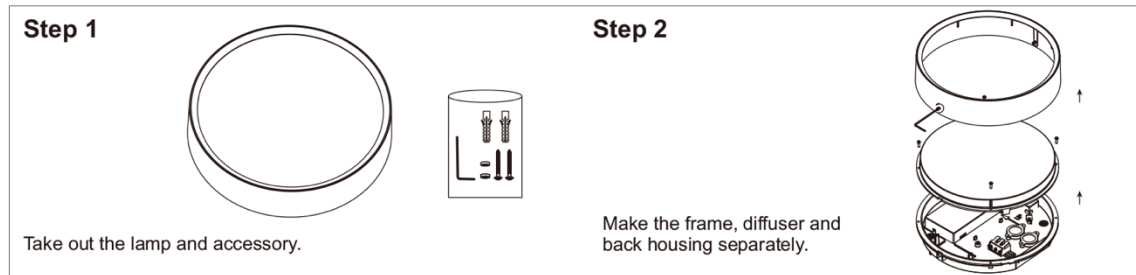

2. Ensure the luminaire is securely fixed to the wall.

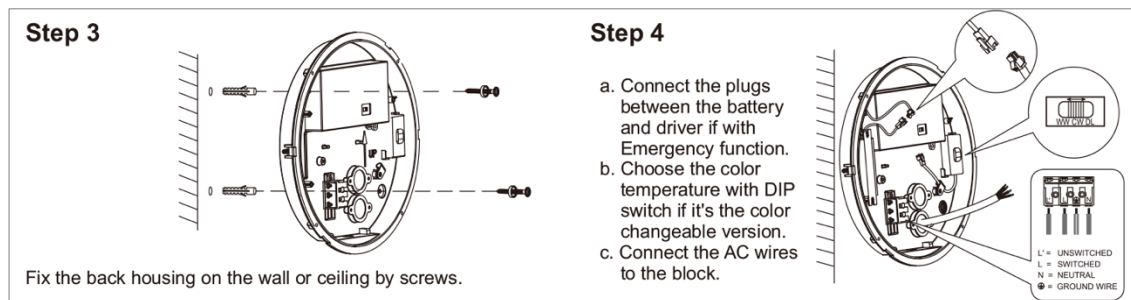

3. Connect Mains supply to the luminaire.

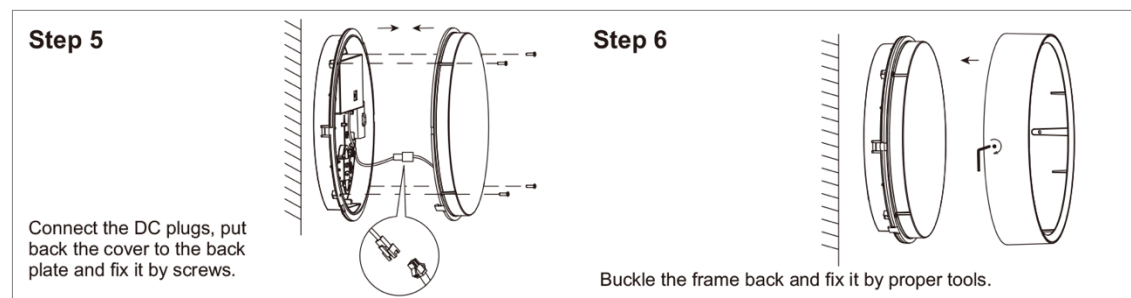

4. Switch on the power supply.

