
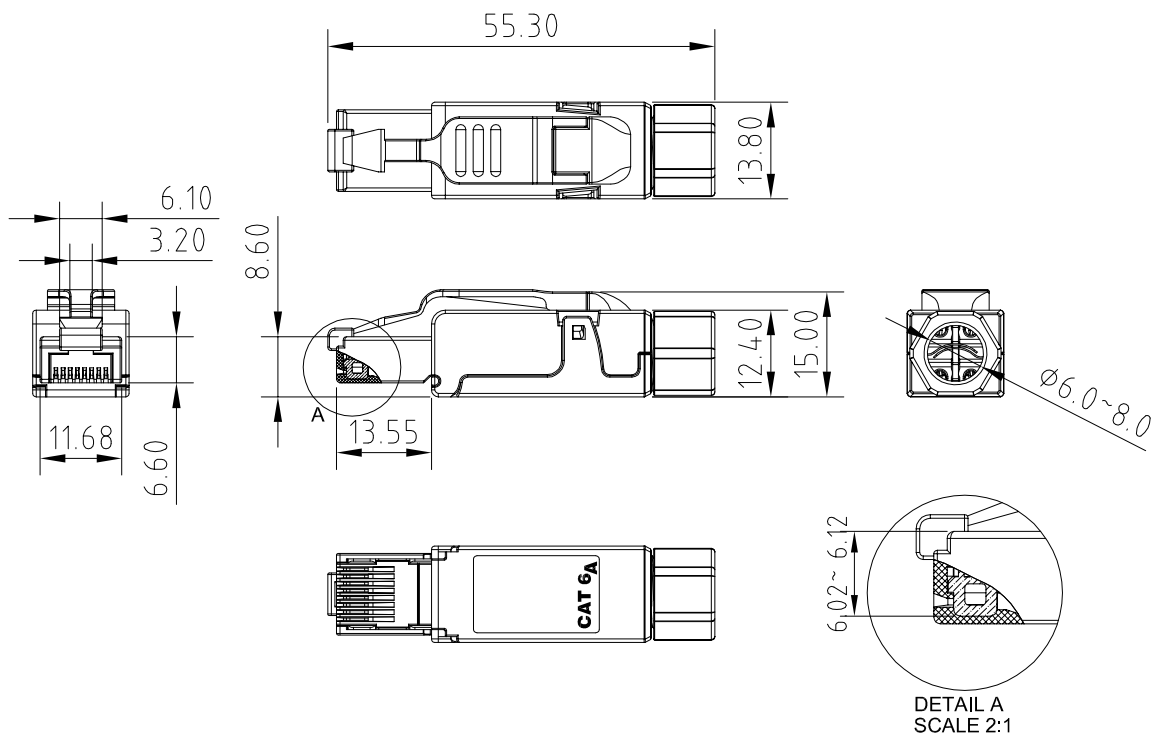
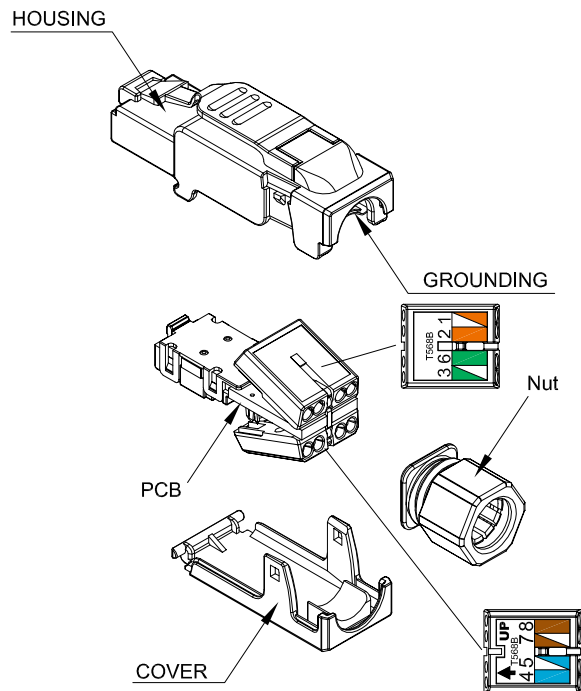


Quick Plug STP Cat. 6A



REVISIONS				
ZONE	REV	DESCRIPTION	DATE	DRAWN
	A		06/09'15	

TRANSMISSION PERFORMANCE

Meet all requirements specified in Patch Cord requirement of
ISO/IEC 11801, Category 6A
ANSI/TIA-568-C.2, Category 6A

ELECTRICAL

Electrical Insulation Resistance : 500MΩ min. @100V d.c
Dielectric Withstanding Voltage : 1000V D.C or A.C Peak,
Contact to Contact;1500V D.C or A.C Peak,
Contact to Shield @ 60Hz for 1 Minute.

MECHANICAL

IDC Wire Gauge : 23 ~ 26 AWG, Stranded Wires.

PHYSICAL

Housing : Zinc-alloy fully shielded
Contact pin : Phosphor Bronze Alloy Plated With
50 micro-inch of Gold

IDC : Phosphor Bronze Alloy With 100
micro-inch 100% Sn Alloy

UNLESS OTHERWISE SPECIFIED: TOLERANCES		PROJECT ID		TITLE	
INCH	MM	ANGULAR	FILE	DATE	06/09'15
.X ± .016	.X ± 0.2	X ± 1°			
.XX ± .008	.XX ± 0.1	.X ± .5°			
.XXX ± .004					
MATERIAL	DRAWN		6970929 Lanse		
SURFACE	CHECK		SIZE	DRAWING NUMBER	PART NUMBER
FINISH	APPROVED		A4	Z4170	
SCALE		1:1	UNIT	mm	SHEET 1 OF 1