

Touch protection for power bus for ET 200SP motor starter  
containing 10 units



Figure similar

Product category	Accessories
Product designation	Infeed bus cover
Design of the product	For ET 200SP
Product type designation	Infeed bus cover

### General technical data

Product function	Zubehör
Degree of pollution	2
Protection class IP	IP20
Shock resistance	6g / 11 ms
Vibration resistance	15 mm to 6 Hz; 2g to 500 Hz

### Installation/ mounting/ dimensions

Mounting position	vertical, horizontal, flat
Mounting type	pluggable on BaseUnit
Height	47 mm
Width	8 mm
Depth	21 mm

### Ambient conditions

#### Ambient temperature

- during operation
- during storage
- during transport

-25 ... +60 °C

-40 ... +70 °C

-40 ... +70 °C

#### Certificates/approvals

##### General Product Approval



CSA



UL



EG-Konf.

[Type Test  
Certificates/Test  
Report](#)



ABS

##### Shipping Approval

##### other



LRS

[Confirmation](#)

#### Further information

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1908-1DA00-2BP0>

##### Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1908-1DA00-2BP0>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1908-1DA00-2BP0>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RK1908-1DA00-2BP0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1908-1DA00-2BP0&lang=en)

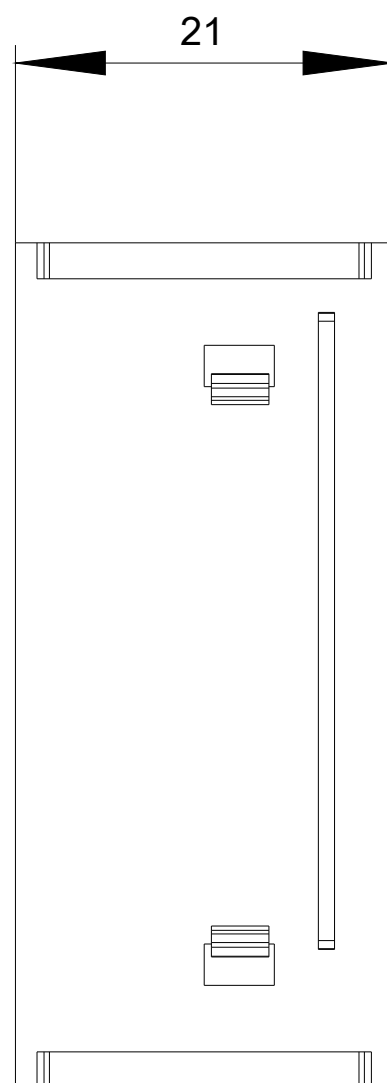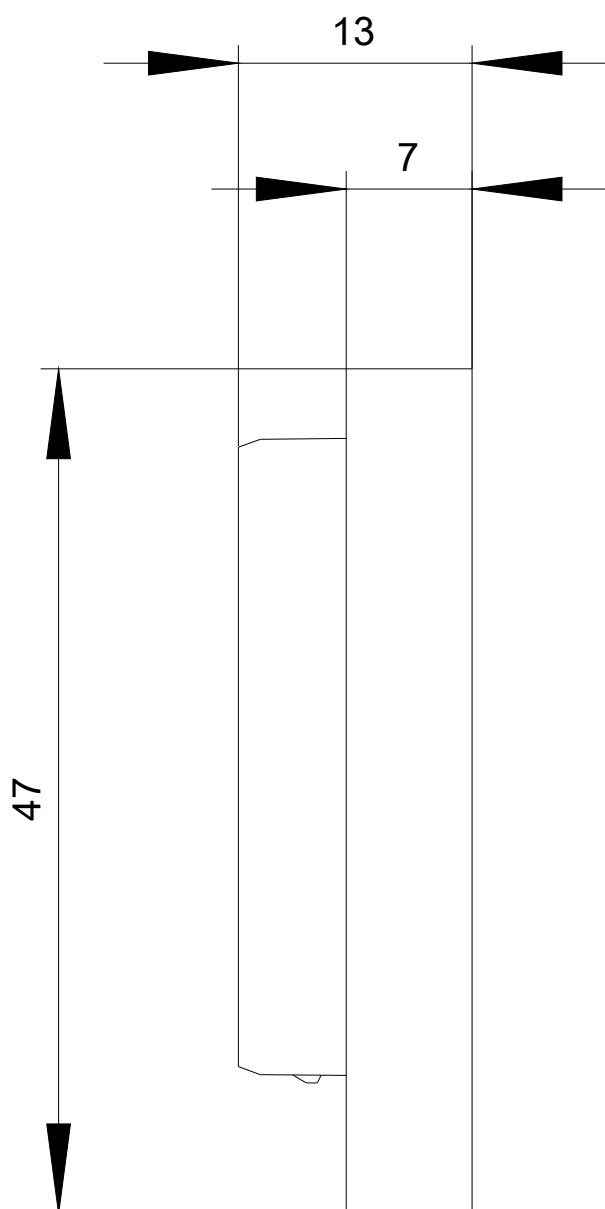

last modified:

10/06/2017