




symbolic image

DATA SHEET

DFS 4 100-4/0,30-A R
pulsating AC/DC-sensitive type A
Article number 09166911


[Internetlink](#)


Function

Residual current circuit-breakers (RCCBs) are components for implementing protective measure "Automatic disconnection of the power supply" as per VDE 0100 part 410 or corresponding international installation regulations. Series DFS 4 devices are compact two or four-pole residual current circuit-breakers. In the standard design, they only take up four module width units of space. Although DFS 4 devices for AC and pulsating DC residual currents are actually designed for three-phase networks, they can also be used in single-phase networks. However, in addition to these, special variants are also available for single or three-phase operation in the form of the AC/DC sensitive designs (type B, type B+). In spite of the compact dimensions, a number of different tripping currents and characteristics are available at rated currents, depending on the design, up to 125 A. They also have large two-tier terminals for large conductor cross-sections, a practical multifunctional switch toggle and can be provided with pre-prepared labels using free-of-charge software. Switches with residual current characteristic A allow the mains voltage independent detection of sinusoidal AC currents and pulsating DC residual currents. Any possible additional functions may be voltage-dependent. Devices in the standard design are intended for monitoring circuits with a rated voltage of 230 V/400 V and a rated frequency of 50 Hz.

Features

tripping not dependent on mains and auxiliary voltage, sensitive to AC residual currents and pulsating DC residual currents (type A), compact design for all rated currents, high short-circuit resistance, double-sided two-tier terminals for large conductor cross-section and busbar, switch position indicator, viewing window for labels, multifunction switch toggle with three positions: "on", "off" and "tripped", also available in the "HD" design, Neutral conductors with standard design left, for two-terminal-pair devices type A/AC/F up to 125 A and type B/B+ up to 80 A; N-right available at no extra charge.

Mounting

quick fastening to mounting rail, any installation position, supply from any direction

Applications

Power supplies to residential and purpose-built buildings as well as industrial facilities with TN-S, TT and TN-C-S networks. In IT networks, the residual current circuit-breakers of this series can be set to switch off in the event of a second fault. Excluded is the application in TN-C systems and for the protection of installations in which electronic equipment could generate smooth DC currents or residual currents with frequencies other than 50 Hz. Comprehensive protection is not provided in this case. For these applications we recommend our AC/DC sensitive residual current circuit-breakers (Type B or B+).

Accessories

Automatic reclosing devices DFA, Clamp covers KA, Information stickers HAS, Auxiliary Switches DHi, Software BS DLS/DFS


Technical Data

Technical Data	DFS 4 100-4/0,30-A R
Series	DFS 4 A
Number of poles	4
Residual current type	A
Rated current (AC)	100 A
Rated residual current I Δ n	0.30 A
Short-time delayed	false
Selective	false
min. Operating voltage range of test circuit	200 V

Technical Data	DFS 4 100-4/0,30-A R
max. Operating voltage range of test circuit	250 V
Neutral conductor position	right
Maximum disconnection times	$1 \cdot I_{\Delta n} \leq 300 \text{ ms}; 5 \cdot I_{\Delta n} \leq 40 \text{ ms}$
	Load circuit
Specification	Load switch contact
min. Output O1 Contact opening	4 mm
Rated voltage (AC)	230 V, 400 V
Rated current (AC)	100 A
Rated short-circuit current	10 kA
Surge current strength	0.25 kA
max. Output O1 total rated switching capacity	1000 A
Rated insulation voltage	400 V
Rated impulse withstand voltage	4 kV
Rated frequency	50 Hz
Current heat loss per current path	7.5 W
thermal Backup-fuse OCPD	80 A
short-circuit backup-fuse SCPD	125 A
Back-up fuse type	gG
	Screw-type terminal top and bottom (Load circuit)
Protection against direct contact	DGUV V3, VDE 0660-514, finger-safe and safe for back-of-hand
Connection C1 Maximum number of conductors per terminal	2 (conductors of same type and cross-section)
Cross section solid	1-wire: 1.5 mm ² ... 50 mm ² ; 2-wire: 1.5 mm ² ... 16 mm ²
Connecting capacity flexible	1-wire: 1.5 mm ² ... 50 mm ² ; 2-wire: 1.5 mm ² ... 16 mm ²
Cross section stranded	1-wire: 1.5 mm ² ... 50 mm ² ; 2-wire: 1.5 mm ² ... 16 mm ²
Tightening torque	2.5 Nm ... 3 Nm
General data description	General data
Operating position	any
max. Operating altitude above MSL	2000 m
Mechanical endurance	min. 5000 cycles
Electrical endurance	min. 2000 cycles
Surrounding atmosphere	normal environmental conditions
Storage temperature	-35 °C ... 75 °C
Ambient temperature	-25 °C ... 40 °C
Climate resistance	according to IEC 60068-2-30: humid heat / cyclic (25 °C / 55 °C; 93 % / 97 % RH)
Shock resistance	20 g / 20 ms Duration
Fatigue limit	> 5 g (f ≤ 80 Hz, duration > 30 min.)
Housing type	Distributor housing
Mounting type	Mounting rail
Housing material	Thermoplastic resin
Protection class	IP20 (installed: IP40)
sealable	true
Width	72 mm
Height	85 mm
Depth	75 mm
Installation depth	69 mm


Technical Data	DFS 4 100-4/0,30-A R
Width (modules)	4
Design requirements/Standards	VDE 0664-10, EN 61008-1
Certifications	VDE
Degree of pollution according to EN 60664	2

Dimensions

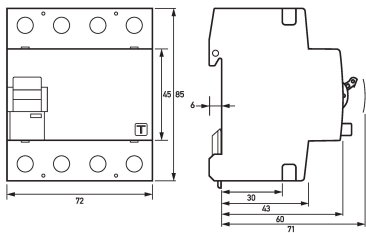

Dimensional drawing Group view

Wiring example



Wiring diagram