

Tilknytningskap TKS H150 Komplet



Komplett tilknytningskap for sterkstrøm og E-com til utvendig plassering i varmgalvanisert stål. Skapet har kapslingsgrad IP34D og UV-bestendig pulverlakk for optimalisering til utendørs plassering.

Skapet leveres som standard med målerbrett og 22 modulplasser.

Overspenningsvern, sikringsholder og sikringer, samt målersløyfe, overgangspisker og koblingsklemmer medfølger ferdig montert.

Frontavdekning: IP2XC Lås: DIN lås m/trekantnøkkel. Farge / Lakk: UV-bestendig pulverlakk RAL7035 (lysegrå), RAL7021 (sort) eller ulakkert (galvanisert stål)



Skapet kommer ferdig med sokkel som kan monteres i bakken eller støpes fast.

Skapet er laget i henhold til NEK399 2018. Testet ifølge tavlenormen NEK EN61439-1 & 3 og NEK399 6.29.1

Skapene er testet iht. NEK IEC60068-2-1:2007, NEK IEC60068-2-2:2007 og NEK IEC60068-2-14:2009 (Cold, Dry Heat og Change of temperature)

Skapet er CE merket – dette forutsetter at materiell som brukes og den montasje som utføres er ifølge de normer / forskrifter / veiledninger / instruksjoner som gjelder for skapets anvendelse.

El.nr.	Varenavn	Spenning	Holder	Max Sikring
17 169 81	TKS komplett 230V - IT - 63A Grå	230V	Tytan d0 II	3 x 63A
17 169 82	TKS komplett 230V - IT - 80A Grå	230V	OPVP22	3 x 80A
17 169 83	TKS komplett 400V - TN - 63A Grå	400V	Tytan d0 II	3 x 63A
17 169 84	TKS komplett 400V - TN - 80A Grå	400V	OPVP22	3 x 80A
17 169 85	TKS komplett 230V - TT - 63A Grå	230V - TT	Tytan d0 II	3 x 63A
17 169 86	TKS komplett 230V - TT - 80A Grå	230V - TT	OPVP22	3 x 80A

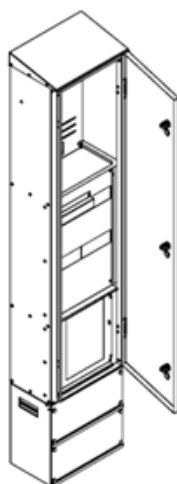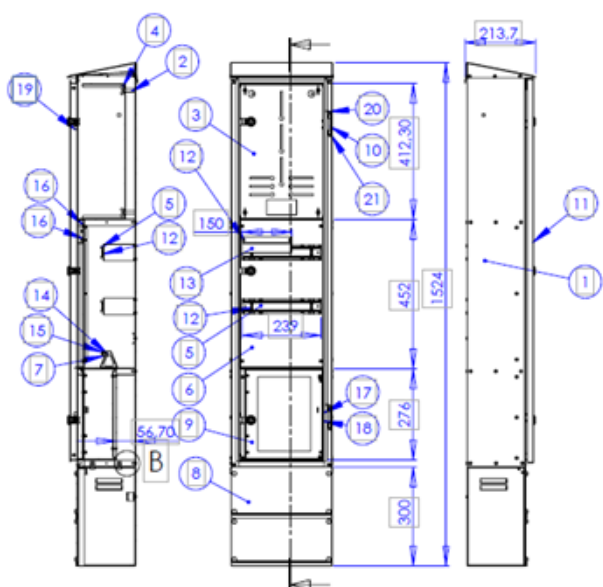

ITEM NO.	PART NUMBER	DESCRIPTION	Default QTY.
1	(R51121)	Pre-assembled TKS 120x30x20	1
2	Spacer 5.3x10x30		4
3	(R50682)	Meter plate for Out door cabinet	1
4	-	Nut M5 DIN 91315 (wing nut)	4
5	(R51114)	DIN Rail for 13 modules Lx235	2
6	(R51122)	2R fuse cover for TKS	1
7	(R50677)	Copper bracket 245mm	1
8	(R51136)	Complete narrow TKS fundament	1
9	(R51129)	Complete LV unit for narrow TKS	1
10	Loose Hinge ST43		2
11	(R51124)	Welded door for TKS cabinet 120x30	1
12	-	SCREW 4.2x9.5 DIN 9131F D1	18
13	(R51130)	Cover for short cut circuit breaker	1
14	Rivet nut M5 flat head Zn		2
15	-	Bolt M5x15, DIN 9135 Zn	2
16	-	Halon washer M5	6
17	-	WASHER M4 DIN 127 M4 A2	4
18	-	BOLT M4x5 DIN 9135 A2 PH	4
19	Plastic plug D=5.1 RAL7035		4
20	312106-03	Hinge pin D=5, L=80, A2	2
21	062193	Pivoting Ring for hinge pin A2	2

Samme skap som standard men i RAL7021 Sortgrå.



El.nr	Varenavn	Spenning	Holder	Max Sikring
17 169 42	TKS komplett 230V - IT - 63A Sort	230V	Tytan d0 II	3 x 63A
17 169 43	TKS komplett 230V - IT - 80A Sort	230V	OPVP22	3 x 80A
17 169 44	TKS komplett 400V - TN - 63A Sort	400V	Tytan d0 II	3 x 63A
17 169 45	TKS komplett 400V - TN - 80A Sort	400V	OPVP22	3 x 80A
17 169 46	TKS komplett 230V - TT - 63A Sort	230V - TT	Tytan d0 II	3 x 63A
17 169 47	TKS komplett 230V - TT - 80A Sort	230V - TT	OPVP22	3 x 80A

Samme skap som standard men ulakkert. Kun galvanisert stål.

El.nr.	Varenavn	Spenning	Holder	Max Sikring
17 169 10	TKS komplett 230V - IT - 63A Galv	230V	Tytan d0 II	3 x 63A
17 169 14	TKS komplett 230V - IT - 80A Galv	230V	OPVP22	3 x 80A
17 169 16	TKS komplett 400V - TN - 63A Galv	400V	Tytan d0 II	3 x 63A
17 169 17	TKS komplett 400V - TN - 80A Galv	400V	OPVP22	3 x 80A
17 169 18	TKS komplett 230V - TT - 63A Galv	230V - TT	Tytan d0 II	3 x 63A
17 169 19	TKS komplett 230V - TT - 80A Galv	230V - TT	OPVP22	3 x 80A

230V



400V



El.nr.	Varenavn	In [A]	Un [V]	Passer til	Pakni
16 062 58	Tytan DSE D02-35A sikringsett à 3 stk sikringer	35A	400V	1716981/83	ng3/3
16 062 57	Tytan DSE D02-40A sikringsett à 3 stk sikringer	40A	400V	1716981/83	3/3
16 062 56	Tytan DSE D02-50A sikringsett à 3 stk sikringer	50A	400V	1716981/83	3/3
16 062 55	Tytan DSE D02-63A Sikringsett à 3 stk sikringer	63A	400V	1716981/83	3/3
17 017 51	Sikring PV22 40A gG	40A	690V	1716982/84	1/10
17 017 50	Sikring PV22 50A gG	50A	690V	1716982/84	1/10
17 017 49	Sikring PV22 63A gG	63A	500V	1716982/84	1/10
17 017 48	Sikring PV22 80A gG	80A	500V	1716982/84	1/10

Innholstabell over komplette TKS tilknytningsskap

El nr	Beskrivelse	Galv Sort Grå	1716910 1716942 1716981	1716914 1716943 1716982	1716916 1716944 1716983	1716917 1716945 1716984	1716918 1716946 1716985	1716919 1716947 1716986
1606255	Tytan DSE D02-63A Sikringsett		1		1		1	
1606254	Tytan d0II sikr.lastbr. 63A3+N				1			
1606253	Tytan d0 II sikr.lastbr. 63A3P		1				1	
1716925/26/89	TKS Tilknytningsskap H150 tomme		1	1	1	1	1	1
1317201	Strips Sort 2,5 x 98mm		3	3	3	3	3	3
1701745	Sikringsholder OPVP22-3 125A 3P			1				1
1701746	Sikringsholder OPVP22-3N 125A 4P					1		
1701748	Sikring PV22 80A GG			1		1		1
1606104	Samleskinne Tytan/OSP 4P				1			
1606103	Samleskinne Tytan/OSP 3P		1				1	
V10-1002697	RK H07 V-K 16,00mm2 Sort					0,2		
V10-1002685	RK H07 V-K 10,00mm2 Sort					1,3		
V10-1002689	RK H07 V-K 10,00mm2 G/G		0,3	0,3	0,3		0,3	0,3
1204145	PISK.SP.AL-CU 16/50q 35cm N/PE				1			
1204148	PISK AL-CU 16/50q 35cm 3P		1	1	1	1	1	1
1615088	Ovsp. Vern 3P m/sign TN 40kA						1	1
1615089	OVSP.VERN 3P m/sign IT 40kA		1	1				
1615091	OVSP.VERN 4P m/sign TN 40kA				1	1		
SET400V8CA	Målersl 4P 16mm2 TKS					1		
SET6-400V8CA	Målersl 4P 10mm2 TKS				1			
SET230V6CA	Målersl 3P 16mm2 TKS			1				1
SET5-230V6CA	Målersl 3P 10mm2 TKS		1				1	
1217936	M50 Membrannippel		2	2	2	2	2	2
1217927	M20 Kontramutter		1	1	1	1	1	1
1217994	M20 Blindplugg		1	1	1	1	1	1
1217928	M12 Kontramutter		1	1	1	1	1	1
1217992	M12 Blindplugg		1	1	1	1	1	1
1317211	Limefeste f/strips 4,8mm sort		2	2	2	2	2	2
1204110	Kobl.klemme 1x50mm2 Al/Cu Grå		3	3	3	3	3	3
1204112	Kobl.klemme 1x50mm2 Al/Cu G/G					1		
1204111	Kobl.klemme 1x50mm2 Al/Cu Blå				1	1		
1803478	Endehylse ISO. 2x16q/14 Blå			3		5		3
1803462	Endehylse ISO. 16q/12 Blå					1		
1803461	Endehylse ISO. 10q/18 Rød		1	1	1	1	1	1
1803460	Endehylse ISO. 10q/12 Rød		1	4	1	6	1	4
1204135	Bøyleklemme 70q 12x5mm Al/Cu		2	2	2	2	2	2
1218189	Bøyleklemme 35q 12x5mm		1	1	1	1	1	1
1218188	Bøyleklemme 16q 12x5mm		1	1	1	1	1	1
1604708	Bindplate 12M Hvit		1	1	1	1	1	1

Målersløyfe




Farge / El.nr	●	17 000 40	-	-	-
Sett 3 pol S/G/BR	●●●	17 000 46	-	-	-
Sett 4 pol S/G/BR/BL	●●●●	17 000 47	-	-	-
Sett 3 pol Sort	●	-	17 000 44	-	-
Sett 3 pol Nett/anlegg	●●●	SET5-230V6CA	SET230V6CA	-	-
Sett 4 pol Nett/anlegg	●●●●	SET6 400V8CA	SET400V8CA	-	-

NORM PVC (Selvslukkende og flammehemmende)	IEC 60332-1	IEC 60332-1	IEC 60332-1	IEC 60332-1
NORM LEDER	IEC 60228 Kl.5	Fortinnet kobber IEC 60228 Kl.5	IEC 60228 Kl.5	IEC 60228 Kl.5
ISOLASJON YTRE	PVC	Polymer GM3 VDE 0207-20	PVC	PVC
ISOLASJON INDRE	PVC	3GI3 VDE 0207-20	-	-
KABELTVERRSNITT	10 mm ²	16 mm ²	10 mm ²	16 mm ²
TESTSPENNING	2Kv/2,5Kv	6Kv	2Kv/2,5Kv	2Kv/2,5Kv
DRIFTSPENNING	Uo/U 450/750V	Uo/U 1,8/3kV	Uo/U 450/750V	Uo/U 450/750V
STRØM (In)				
KORDELL OPPBYGGING	325 x 0,20	483 x 0,20	325 x 0,20	483 x 0,20
UTVENDIG DIAMETER	7,7	13		
MONTERING				
MÅL LENGDE (mm)	1800	1800	1800	1800
MÅL LENGDE NETT/ANLEGG	900mm	900mm	900mm	
TEMP OMRÅDE	-25°C til +70°C	+90°C		
TEMP OMRÅDE (Fast forlagt)		-5 til +80°C	- 40 til +80°C	
TEMP OMRÅDE (Fritt forlagt)		-25 til +80°C	-5 til +70°C	

SKK

Settet leveres med ledning i fargene sort, grå, brun og blå.

Ledningene er retningsmerket med piler.
Dobbelisolert enleder i PVC-høyfleksibel.

Bruksområder:

Koblingskabel til alle formål, hvor det er behov for dobbeltisolert ledning, f.eks målesløyfer.

Lengde 1800mm. Begge ender presset. (Ultrasonic welding)

RK

Settet leveres med ledning i fargene sort, grå, brun og blå.

Ledningene er retningsmerket med piler.
Dobbelisolert enleder i PVC-høyfleksibel.

Bruksområder:


Koblingskabel til alle formål, hvor det er behov for dobbeltisolert ledning, f.eks målesløyfer.

Lengde 1800mm. Begge ender presset. (Ultrasonic welding)



ATCU 50 Klemme/Pis

Beskrivelse:	ATCU Klemme/Pisk	DB-810-001-E	16.03.2010
Type:	ATCU-50 ... (med kabel)		
Info.:	FTG Produktet er produsert ihht EU's krav til RoHS 50mm ² kabel behøver ikke å avmantles ved tilkobling. 25mm ² kabel skal IKKE avmantles ved tilkobling.		
Note:	Når kabel avmantles anbefales det å benytte kontaktfett ved tilkobling.		

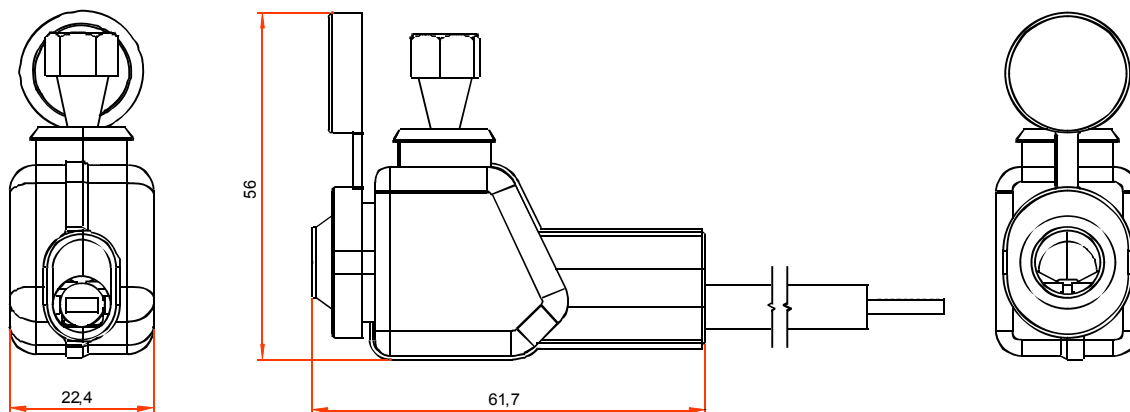

Materiale:	Klemme:	Alu	Blank
	Hus:	PA66-V0	Grå RAL 7035
	Hette:	TPE	Grå RAL 7035
	Kabelsko:	E-Cu58	Sn 4-6µm
	Klemmeskue:	Stål	Zn8µm cB

Varme bestandighet.:	HDT B ISO179 = 200°C – UL94-V0/1,5
-----------------------------	------------------------------------

Isolasjonsspenning	600V
---------------------------	------

Norm:	EN 60998-1:2004, EN 60998-2:2004, EN60999-1:2000, EN60999-2:2003
--------------	--

Elektriske data:	Maks elektrisk last	80A
	IP Klasse	IP20
	Maks spenning	600V

Mekaniske data:	Klemmeskrue knekker ved riktig moment. 12-13Nm
------------------------	--

Skrue knekker med riktig moment ca. 12-13Nm
 50mm² kabel behøver ikke å avmantles ved tilkobling.
 25mm² kabel skal IKKE avmantles ved tilkobling.
 Når kabel avmantles anbefales det å benytte kontaktfett ved tilkobling.

Kabeldimensjoner:	25mm ² til 50mm ²
--------------------------	---

Maks tversnitt :
 Min tversnitt :

U – en leder R – flerkordell (PN)	K – finkordell RK (med hylse) F – finkordell RK (med hylse)
70mm ²	50mm ²
25mm ²	16mm ²

Montasjeveiledning:	Stikk kabel inn i klemmen (ca 30mm). Hold klemmehuset i hånden, eller med en tang og skru til klemmeskruen med en 10mm fastnøkkel til skruehodet brekker av (ca 12-13Nm) Sett på beskyttelseskappen for å sikre IP grad/beskyttelse.
----------------------------	---






Koblingsklemme for Al/Cu

FTG**KVIAC 11016****1,5 - 16 mm²****KVIAC11050****1,5-50 mm²****KVIAC12050****2 x 1,5-50 mm²**

Farge / ELNr	GRÅ	●	12 041 67
	BLÅ	●	12 041 68
	Gul/Grønn	●●	12 041 69

12 041 10	12 041 13
12 041 11	12 041 14
12 041 12	12 041 15

NORM	IEC 60228 - Class 5		IEC 60228 - Class 5	IEC 60228 - Class 5
SERTIFIKAT	CE, UL1059, SGS		CE, UL1059, SGS	CE, UL1059, SGS
KABELVERRSNITT Al/Cu Kabel	1.5 - 16 mm ²		1,5 - 50 mm ²	2 x 1,5 - 50 mm ²
SPENNING	690 V		690 V	690 V
STRØM	82 A		160 A	320 A
TILTREKNINGSMOMENT	1.5 Nm (1.5 mm ²) (Cu) 3.5 Nm (2.5-6 mm ²) 7 Nm (10-16 mm ²)		1.5 Nm (1.5-2.5 mm ²) (Cu) 5 Nm (4-10 mm ²) 12 Nm (16-50 mm ²)	1.5 Nm (1.5-2.5 mm ²) (Cu) 5 Nm (4-10 mm ²) 12 Nm (16-50 mm ²)
MONTERING	DIN		DIN	DIN
VEKT	15 g		30 g	90 g
ANTALL / PAK.	100 ● 30 ● 30 ●●		50 ● 30 ● 30 ●●	20 ● 15 ● 15 ●●
MÅL	L=45, L1=42, L2=35 H=39,5, H1=11, H2=7 W=13,5, W1=6, AV=4		L=50, L1=48, L2=35 H=43, H1=10, H2=12,5 W=18, W1=10, AV=5	L=49, L1=48, L2=35 H=43, H1=10, H2=12,5 W=30, W1=10, AV=5
ARBEIDSTEMPERATUR	Maks 90°C		Maks 90°C	Maks 90°C

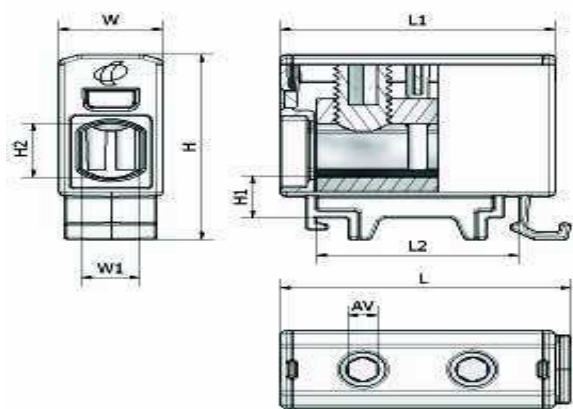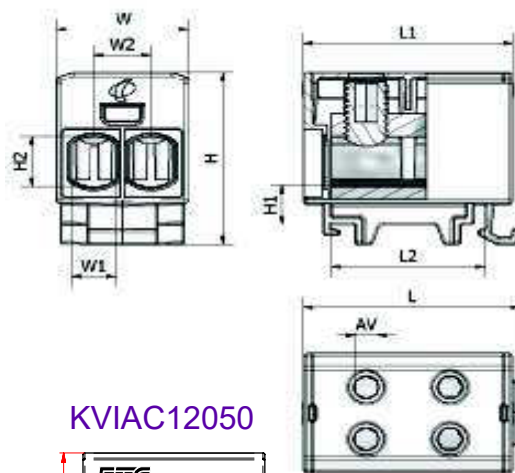KVIAC11016**KVIAC11016****KVIAC11050****KVIAC12050****KVIAC12050**

Overspenningsvern DS4X Type 2



DS41



DS42



DS43





DS44

Type nett
/ ELNr

TN u/signalkontakt	16 150 80			16 150 86		16 150 90
IT u/signalkontakt	16 150 81			16 150 87		16 150 91
TN m/signalkontakt	16 150 82		16 150 84	16 150 88		16 150 92
IT m/signalkontakt	16 150 83		16 150 85	16 150 89		16 150 93

NORM	IEC 61643-1 EN 61643-11	IEC 61643-1 EN 61643-11	IEC 61643-1 EN 61643-11	IEC 61643-1 EN 61643-11
SERTIFIKAT				
KABELVERRSNITT Al/Cu Kabel	2.5 - 35 mm ²	2.5 - 35 mm ²	2.5 - 35 mm ²	2.5 - 35 mm ²
SPENNING	Se tabell 1	Se tabell 1	Se tabell 1	Se tabell 1
RESTSPENNING U _c	1,3kV	1,3kV	1,3kV	1,3kV
NOMINELL AVLEDERSTRØM	20Ka	20Ka	20Ka	20Ka
MAKS AVLEDERSTRØM	40Ka	40Ka	40Ka	40Ka
TILTREKNINGSMOMENT	2.0 - 2.5 Nm	2.0 - 2.5 Nm	2.0 - 2.5 Nm	2.0 - 2.5 Nm
MONTERING	DIN	DIN	DIN	DIN
ANTALL / PAK.	1/1	1/1	1/1	1/1
MÅL	Se målskisse	Se målskisse	Se målskisse	Se målskisse
ARBEIDSTEMPERATUR	-40/+85°C max.	-40/+85°C max.	-40/+85°C max.	-40/+85°C max.
Vedlikehold	Kreves ikke vedlikehold	Kreves ikke vedlikehold	Kreves ikke vedlikehold	Kreves ikke vedlikehold

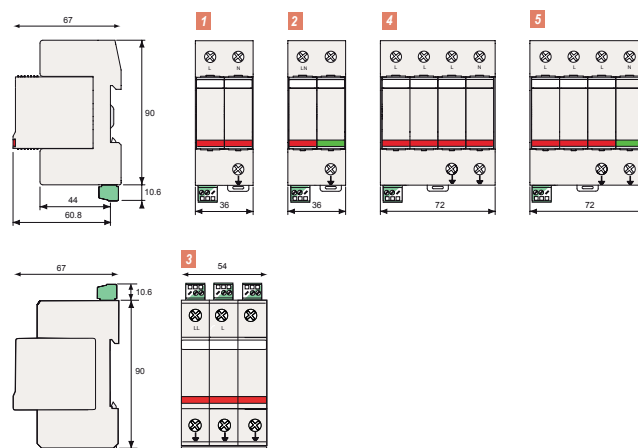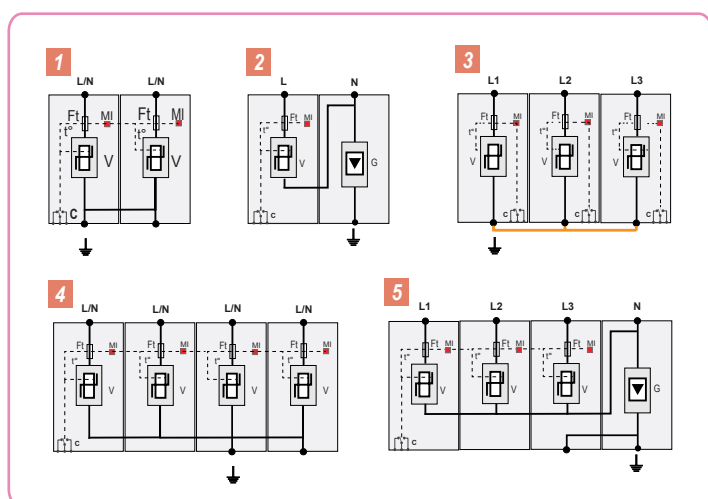


Overspenningsvern DS4X Type 2

Mellomvern


Gruppe 16A



Mål

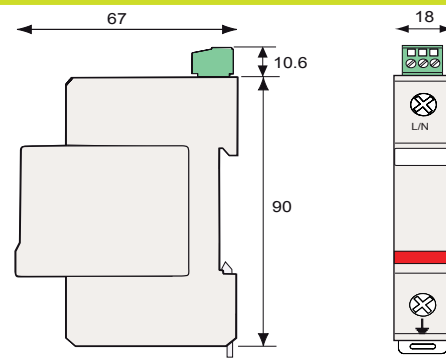


Koblingsbilde




DS41S (1 pol)

V: Høy-energi motstand
 Ft: Termisk sikring
 C: Signaling Kontakt
 t°: Termisk frakoblings system
 Mi : Utkoblingsindikator


Installasjon

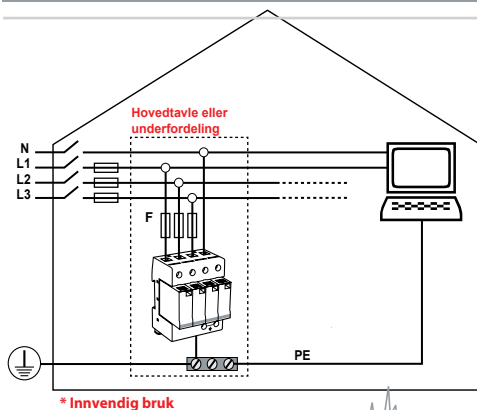


* Innvendig bruk

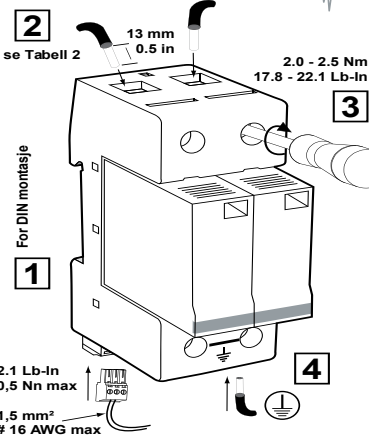

Kobling

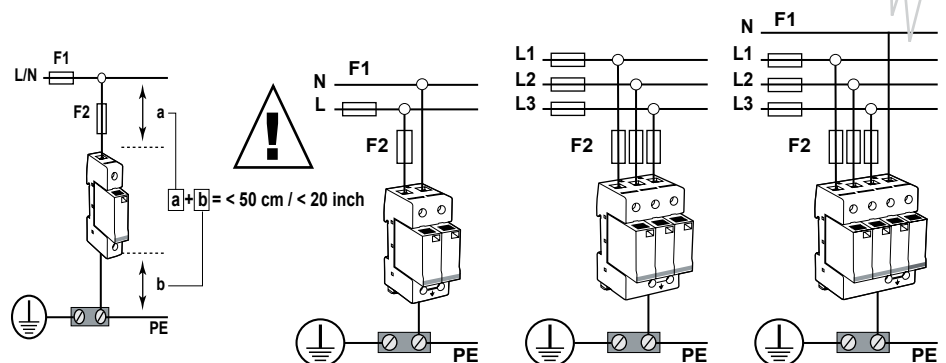

Vedlikehold

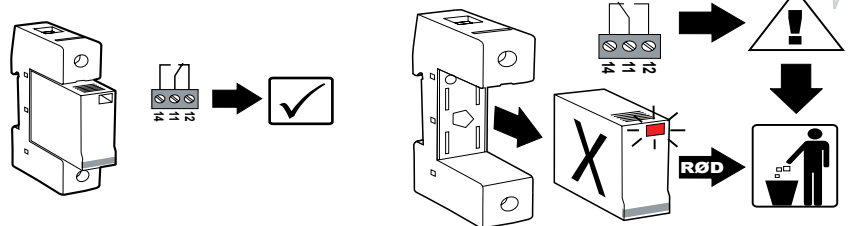

Tabell 1

	P/N															
	DS42S-120	DS42S-120/G	DS43S-120	DS44S-120	DS44S-120/G	DS42S-230	DS43S-230	DS44S-230	DS44S-230/G	DS42S-280	DS43S-280	DS44S-280	DS44S-280/G	DS42S-320	DS43S-320	DS44S-320
120 Vac L+N	●															
208 Vac 3L		●														
120/208 Vac 3L+N			●													
230 Vac L+N				●												
400 Vac 3L					●											
230/400 Vac 3L+N						●										
480 Vac 3L							●									
277/480 Vac 3L+N								●								
600 Vac 3L									●							
347/600 Vac 3L+N										●						
690 Vac 3L											●					
480/690 Vac 3L+N												●				
I _{PE}	< 1mA / (= 0 mA for G version)															
I _{SCCR}	25 kA															
I _{max}	40 kA															

Signalkontakt for eksternt signal

11-12 Lukket= SPD OK
 11-14 Åpen= SPD OK
 11-12 Åpen= SPD discon.
 11-14 Lukket= SPD discon.

250 Vac/
 0.5 A max
 30 Vdc
 3 A max

Tabell 3

1* max.

2* anbefalt

F1 > 125 A

F1 > 50 A

F2 ≤ 125 A

F2 = 50 A

F1 ≤ 125 A

F1 ≤ 50 A

No F2

F2 < F1

Tabell 2

min-max Ø

2.5 - 35 mm²

13-2 AWG

2.5 - 25 mm²

13-4 AWG



DATA SHEET

Tytan II Do-63-3

without fuse

Article number 09980103



[Internetlink](#)



Function

Fuse switch-disconnectors combine fuse protection of system parts with switching capability under load as well as when in overload. Tytan II series devices are main fuse switch-disconnectors for D01 and D02 fuses. Simultaneous isolation of all phases is ensured by the screwcap-less plug-in technology. In contrast to the earlier screwcap technology, in which perfect contact could not be guaranteed, the mechanics of the series prevent the formation of high transitional resistances and therefore minimise thermal dissipation power. Disconnectors in this design are supplied with fitted cartridges for fuses up to 63 A. This standard variant is not lockable.

Features

low current heat losses, suitable for fuses D01 and D02, finger and back-of-hand proof, large clamping area,

Mounting

quick fastening to mounting rail, any installation position

Applications

The components are suitable for use in power supplies to residential and purpose-built buildings as well as industrial facilities.

Notes

all empty housings are supplied with fitted cartridges that can accept fuse plug sets up to 63 A, all variants are supplied without fuses. These can be obtained separately.

Accessories


DSE D02-01 EI, DSE D02-02 EI, DSE D02-04 EI, DSE D02-06 EI, DSE D02-10 EI, DSE D02-16 EI, DSE D02-20 EI, DSE D02-25 EI, DSE D02-35 EI, DSE D02-50 EI, DSE D02-63 EI, DSE D02-02 MI, DSE D02-04 MI, DSE D02-06 MI, DSE D02-10 MI, DSE D02-16 MI, DSE D02-20 MI, DSE D02-25 MI, DSE D02-35 MI, DSE D02-50 MI, DSE D02-63 MI, DSE D02-40 EI, DSE D02-40 MI

Technical Data

Technical Data	Tytan II Do-63-3
Series	Tytan
Number of poles	3
Handling	plug-type technology without screw caps, similar to NH technology
Suitable for fuses	D01: 1 A*, 2 A, 4 A, 6 A, 10 A, 16 A (* - not standardised)
	Load circuit
Specification	Switching contact
Rated voltage (AC)	400 V
Rated voltage (DC)	max. 220 V
Rated current (AC)	2 A ... 63 A
Rated short-circuit current	50 kA
max. Output O1 total rated switching capacity	50 kA


Technical Data	Tytan II Do-63-3
Rated insulation voltage	800 V
Rated impulse withstand voltage	6 kV
Allowed utilization category	AC-22b, DC-21b
	Screw-type terminal top, bottom (Load circuit)
Protection against direct contact	finger-safe and safe for back-of-hand
Cross section solid	1-wire: 1.5 mm ² ... 35 mm ²
Connecting capacity flexible	1-wire: 1.5 mm ² ... 35 mm ² ; 2-wire: 1.5 mm ² ... 16 mm ²
Cross section stranded	1-wire: 1.5 mm ² ... 35 mm ²
Tightening torque	max. 4 Nm
	Do2 (Sicherungsaufnahme)
General data description	General data
Recovery time	100 ms
Operating position	any
Mechanical endurance	min. 10000 cycles
Electrical endurance	min. 1500 cycles
Storage temperature	-25 °C ... 100 °C
Ambient temperature	-25 °C ... 60 °C
Housing type	Distributor housing
Mounting type	Mounting rail
Housing material	Thermoplastic resin
Protection class	IP20
sealable	true
Width	81 mm
Height	86 mm
Depth	70 mm
Width (modules)	4.5
Design requirements/Standards	EN 60947-3
Certifications	VDE
Fire class/creep resistance	Vo, glow wire test 960° / CTI 600
Degree of pollution according to EN 60664	3
Overvoltage class	IV

Dimensions

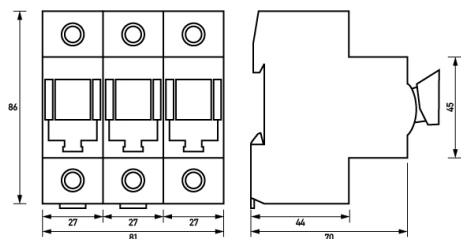

Dimensional drawing Group view

Wiring example

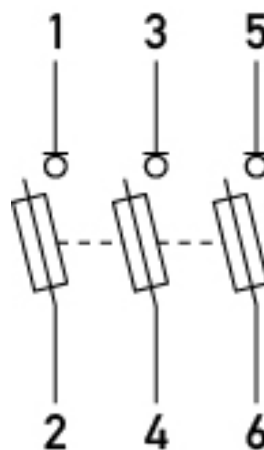

Wiring diagram



DATA SHEET

DSE Do2-63 MI

for load disconnecter Tytan

Article number 09980129



[Internetlink](#)

Function

Optional devices apply as accessories to the main product classes. Fuse plug sets can be used as accessories for initial or replacement equipping of fuse-switch-disconnectors.

Fuse plug sets of this series are accessories to Tytan II fuse-switch-disconnectors and consist of three plugs, three fitting cartridges and three fuses of the respective variant. The box has a rear bracket for snapping on a mounting rail, which allows for using it as spare box in a distribution board. This series of fuse plug sets contains fuses with mechanical display.

Features

Tytan Do empty housing fitting, reserve box, 3 fuses, 3 fitted cartridges, 3 plugs, one 63 A colour-coded

Mounting

Storage case: quick fastening to mounting rail

Applications

The components are suitable for use in power supplies to residential and purpose-built buildings as well as industrial facilities.

Technical Data

Technical Data	DSE Do2-63 MI
Series	DSE Do2-63 MI
Operating voltage (AC)	230 V, 400 V
	Display Fuse failure
Type	Flag indicator
	Load circuit
Rated voltage (AC)	400 V
	Do2 (Sicherungsaufnahme)
General data description	General data
Housing type	Distributor housing
Mounting type	Mounting rail
Width	54 mm
Height	45 mm
Depth	74 mm
Design requirements/Standards	EN 60715, EN 50022, VDE 0110, VDE 0638, EN 60947

Dimensions

