

Printview: Supply module; for flat cable 5 x 16 mm; with screw-type connection; also suitable as tap; tightening torque 3.5 nm; phillips no. 2 screwdriver - Item No.: 895-1651

---



**Supply module; for flat cable 5 x 16 mm; with screw-type connection; also suitable as tap; tightening torque 3.5 nm; phillips no. 2 screwdriver**

*Item No.: 895-1651*



---

*Supply module; for flat cable 5 x 16 mm; with screw-type connection; also suitable as tap; tightening torque 3.5 nm; phillips no. 2 screwdriver*

## Marking

RoHS ✓  
Compliant

## Business data

Supplier	WAGO
Item no.	895-1651
GTIN / EAN	4045454006389
Content	1
Order amount	1
Customer item number	

## Notes

All WINSTA® components are 100% protected against mismatching in terms of:  
a.) plugging different number of poles  
b.) plugging when turned by 180°  
c.) plugging when laterally staggered  
d.) plugging one pole  
Note on Continuous Service Temperature: -35°C to +85°C  
PVC cable for temperatures -70°C (including halogen-free)  
PVC flat cable for temperatures -15°C to 70°C (including halogen-free)  
Insulating parts for temperatures -105°C

## Technical data

### Miscellaneous

Total number of connection points	5
Total number of potentials	5

Printview: Supply module; for flat cable 5 x 16 mm; with screw-type connection; also suitable as tap; tightening torque 3.5 nm; phillips no. 2 screwdriver - Item No.: 895-1651

Technical data	
Color	black
Rated voltage (III / 3) [V]	690 [V]
Rated impulse voltage (III / 3) [kV]	8 [kV]
Pollution degree (1)	3
Rated current [A]	76 [A]
Legend for ratings	(III / 3 ) Overvoltage category III /
Pull-in time	0.0
Connection technology	Screw clamp connection
Actuation type	Operating tool
Connection technology 2	IDC connection
Mating force of a plug-in connection	approx. 30–70N (depending on number of poles)
Unmating force of a plug-in connection	when unlocked: approx. 15–20N
Insulating material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Contact material	Copper or copper alloy, surface-treated
Fire load [MJ]	11.88 [MJ]
Weight [g]	793 [g]
Width	85 mm / 3.346 Inch
Height	90 mm / 3.543 Inch
Depth	200 mm / 7.874 Inch

Printview: Supply module; for flat cable 5 x 16 mm; with screw-type connection; also suitable as tap; tightening torque 3.5 nm; phillips no. 2 screwdriver - Item No.: 895-1651


---

#### Images & drawings



Printview: Supply module; for flat cable 5 x 16 mm; with screw-type connection; also suitable as tap; tightening torque 3.5 nm; phillips no. 2 screwdriver - Item No.: 895-1651

---

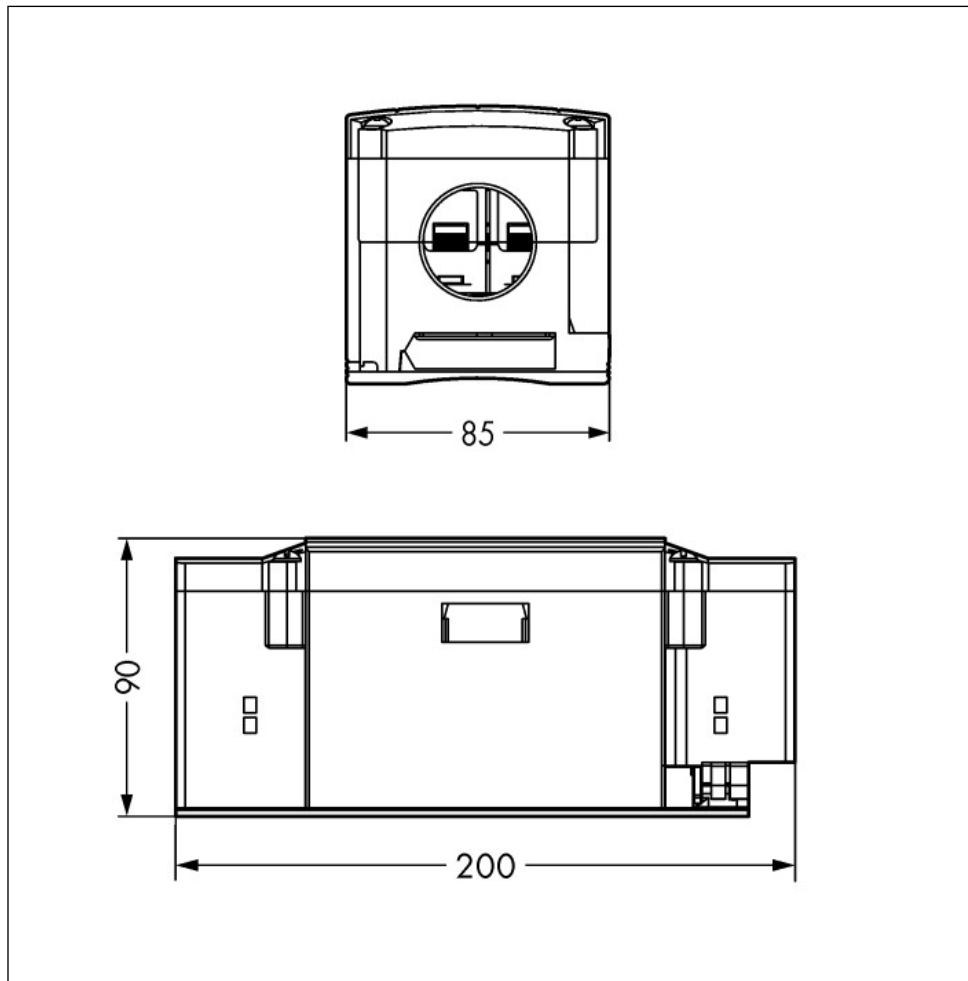

#### Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.