



AUXILIARY SWITCH CHANGEOVER CONTACTS TYPE  
HQ (7MM) ACCESSORY FOR 3VA-BREAKER

Similar to image

Allgemeine Technische Daten:		
Width / Comment		1 slot (7 mm)
Tightening torque / with screw-type terminals / maximum	N-m	0.5
Wire stripping length	mm	15
Connectable conductor cross-section	mm²	0.5 ... 1.5
Insulation voltage / rated value	V	690
Overvoltage class		III
Degree of pollution		3
Impulse voltage resistance / rated value	V	4
Operating voltage		
• at 50 Hz / at AC / rated value / minimum	V	240
• for DC / rated value / minimum	V	250
• at 60 Hz / with AC / compliant with CSA and UL / rated value	V	300
• with DC / compliant with CSA and UL / rated value	V	250
Thermal current	A	6
Operating current		
• at AC-12		
• at 12 V / rated value	A	6
• at 24 V / rated value	A	6

- at 48 V / rated value
- at 110 V / rated value
- at 230 V / rated value
- at AC-15
  - at 12 V / rated value
  - at 24 V / rated value
  - at 48 V / rated value
  - at 110 V / rated value
  - at 230 V / rated value
- at DC-12
  - at 12 V / rated value
  - at 24 V / rated value
  - at 48 V / rated value
  - at 110 V / rated value
  - at 230 V / rated value
- at DC-13
  - at 12 V / rated value
  - at 24 V / rated value
  - at 48 V / rated value
  - at 110 V / rated value
  - at 220 V / rated value

A	6
A	6
A	6
A	3
A	3
A	3
A	3
A	3
A	6
A	4
A	2
A	0.5
A	0.25
A	1
A	0.8
A	0.4
A	0.2
A	0.1

#### Certificates/approvals:

##### Declaration of Conformity

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

##### Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA9988-0AA12>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<http://support.automation.siemens.com/WW/view/en/3VA9988-0AA12/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA9988-0AA12](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9988-0AA12)

##### CAX-Online-Generator

<http://www.siemens.com/cax>

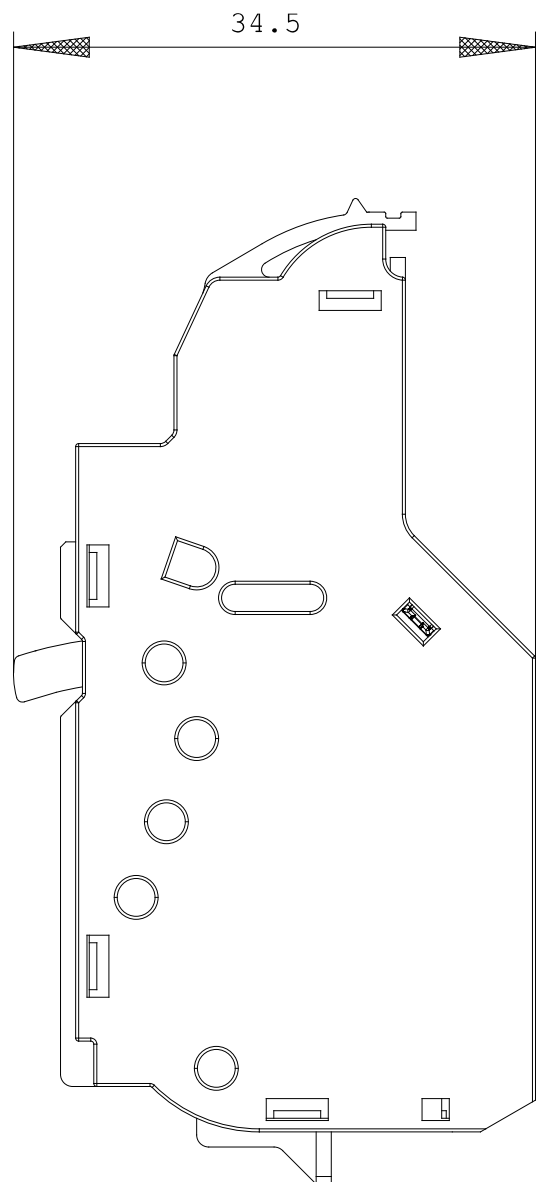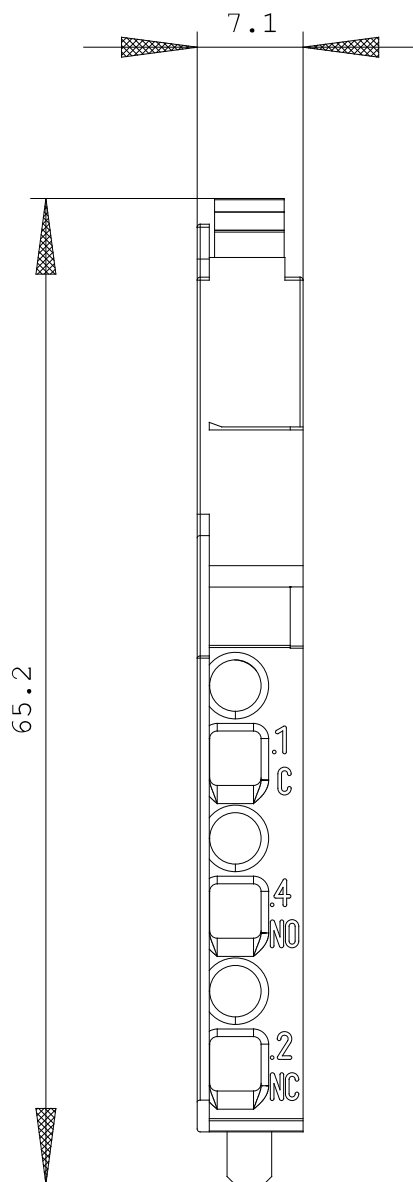

**last change:**

Apr 21, 2014