Data sheet



LOAD FEEDER FUSELESS DIRECT START, AC 400V, SZ S00 0.45. . . 0.63A, AC 230V SPRING-LOADED CONNECTION FOR RAIL-MOUNTING, TYPE OF COORDINATION 2, IQ = 150KA (ALSO FULFILLS TYPE OF COORDINATION 1) 1NO (CONTACTOR)

Product brand name	SIRIUS
Product designation	Direct (on-line) starter
Design of the product	for standard rail or screw mounting
Product type designation	3RA21
Manufacturer's article number	
 of the supplied contactor 	3RT2015-2AP01
 of the supplied circuit-breakers 	3RV2011-0GA20
 of the supplied link module 	3RA2911-2AA00

General technical data	
Size of the circuit-breaker	S00
Size of load feeder	S00
Insulation voltage	
 with degree of pollution 3 rated value 	690 V
Surge voltage resistance rated value	6 kV
Protection class IP	
• on the front	IP20
Type of assignment	2
Protection against electrical shock	finger-safe

Ambient conditions	
Ambient temperature	
during operation	-20 +60 °C
during storage	-50 +80 °C
during transport	-50 +80 °C
Temperature compensation	-20 +60 °C
Main circuit	
Number of poles for main current circuit	3
Adjustable pick-up value current of the current-	0.45 0.63 A
dependent overload release	• · · • · · · · · · · · · · · · · · · ·
Operating voltage	
• rated value	690 V
at AC-3 rated value maximum	690 V
Operating frequency rated value	50 60 Hz
Operating current	
● at AC-3	
— at 400 V rated value	0.6 A
Operating power	
• at AC-3	
— at 400 V rated value	180 W
0 1 1 2 3 4 0 1 1	
Control circuit/ Control Control supply voltage at AC	
• at 50 Hz rated value	230 V
	230 V
at 60 Hz rated value Apparent holding power of magnet coil at AC	4.2 V·A
Apparent holding power of magnet con at AC	4.2 V A
Auxiliary circuit	
Product extension Auxiliary switch	Yes
Protective and monitoring functions	
Trip class	CLASS 10
Design of the overload release	thermal (bimetallic)
bodigit of the overload release	thermal (bimetallic)
UL/CSA ratings	thermal (differance)
-	thermal (officiality)
UL/CSA ratings	0.63 A
UL/CSA ratings Full-load current (FLA) for three-phase AC motor • at 480 V rated value	
UL/CSA ratings Full-load current (FLA) for three-phase AC motor • at 480 V rated value Short-circuit protection	
UL/CSA ratings Full-load current (FLA) for three-phase AC motor • at 480 V rated value	0.63 A
UL/CSA ratings Full-load current (FLA) for three-phase AC motor • at 480 V rated value Short-circuit protection Product function Short circuit protection Design of the short-circuit trip	0.63 A Yes
UL/CSA ratings Full-load current (FLA) for three-phase AC motor • at 480 V rated value Short-circuit protection Product function Short circuit protection	0.63 A Yes
UL/CSA ratings Full-load current (FLA) for three-phase AC motor • at 480 V rated value Short-circuit protection Product function Short circuit protection Design of the short-circuit trip Conditional short-circuit current (Iq)	O.63 A Yes magnetic
UL/CSA ratings Full-load current (FLA) for three-phase AC motor • at 480 V rated value Short-circuit protection Product function Short circuit protection Design of the short-circuit trip Conditional short-circuit current (Iq) • at 400 V acc. to IEC 60947-4-1 rated value	O.63 A Yes magnetic

Mounting type	screw and snap-on mounting onto 35 mm standard mounting rail
Height	197.6 mm
Width	45 mm
Depth	97.1 mm
Required spacing	
for grounded parts	
— forwards	20 mm
— Backwards	0 mm
— upwards	50 mm
— at the side	20 mm
— downwards	10 mm
• for live parts	
— forwards	20 mm
— Backwards	0 mm
— upwards	50 mm
— downwards	10 mm
— at the side	20 mm
Connections/Terminals	
Type of electrical connection	
• for main current circuit	spring-loaded terminals
Safety related data	
B10 value	
 with high demand rate acc. to SN 31920 	1 000 000
Proportion of dangerous failures	
• with high demand rate acc. to SN 31920	73 %
Certificates/approvals	

General Product Approval

For use in hazardous locations

Declaration of Conformity











IECEx



Test Certificates

Marine / Shipping

Special Test Certificate Type Test
Certificates/Test
Report









Marine / Shipping

other

Railway







Environmental Confirmations

Confirmation

Vibration and Shock

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)


https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2110-0GE15-1AP0


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2110-0GE15-1AP0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RA2110-0GE15-1AP0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2110-0GE15-1AP0&lang=en

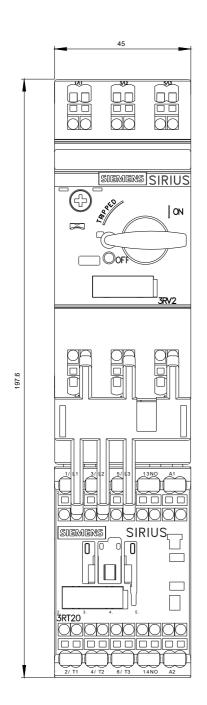

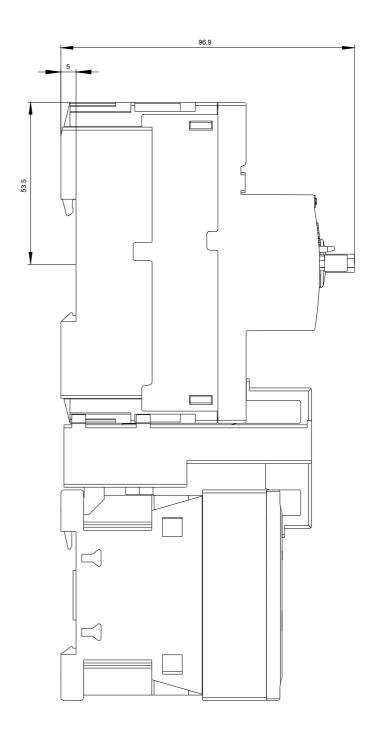

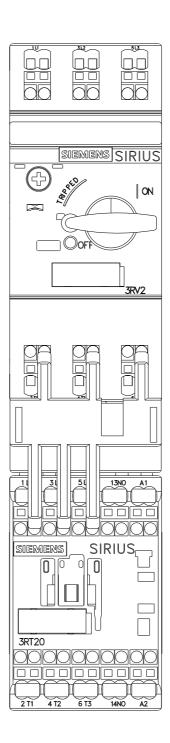

DEREMAN

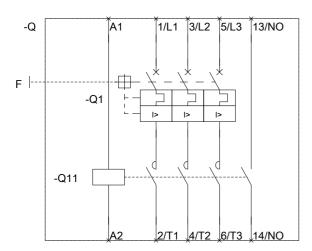

DORAEDCHTESE

last modified: 07/14/2017