

Reversing star-delta switches, Contacts: 10, 63 A, front plate: D-Y-0-Y-D, 60 °, maintained, rear mounting, SOND 29  $\,$ 





T5B-5-15896/Z 091951



Similar to illustration

Delivery program			
Product range			Control switches
Part group reference			T5B
Basic function			Reversing star-delta switches
			with black thumb grip and front plate
Notes			SOND 29
Contacts			10
Degree of Protection			Front IP65
Design			rear mounting
Contact sequence			
Switching angle		0	60
Switching performance			maintained With 0 (Off) position
Front plate no.			FS 638
front plate			D-Y-0-Y-D
Motor rating AC-23A, 50 - 60 Hz			
400 V	Р	kW	30
Rated uninterrupted current	Iu	Α	63
Number of contact units		contact unit(s)	5

# Technical data

delierai		
Standards		IEC/EN 60947, VDE 0660, IEC/EN 60204, CSA, UL Switch-disconnector according to IEC/EN 60947-3
Climatic proofing		Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature		
Open	°C	-25 - +50
Enclosed	°C	-25 - +40
Overvoltage category/pollution degree		III/3

Rated impulse withstand voltage	$U_{imp}$	V AC	6000
	O <sub>imp</sub>		
Mechanical shock resistance		g	15
Mounting position			As required
Protection against direct contact when actuated from front (EN 50274)			Finger and back-of-hand proof
Contacts Electrical characteristics			
		V AC	000
Rated operational voltage	U <sub>e</sub>	V AC	690
Rated uninterrupted current	I <sub>u</sub>	Α	63
Note on rated uninterrupted current !u			Rated uninterrupted current lu is specified for max. cross-section.
Load rating with intermittent operation, class 12			
AB 25 % DF		x I <sub>e</sub>	2
AB 40 % DF		x I <sub>e</sub>	1.6
AB 60 % DF		x I <sub>e</sub>	1.3
Short-circuit rating			
Fuse		A gG/gL	80
Rated short-time withstand current (1 s current)	I <sub>cw</sub>	A <sub>rms</sub>	1300
Note on rated short-time withstand current lcw			Current for a time of 1 second
Rated conditional short-circuit current	Iq	kA	2
Switching capacity	. 1		
cos φ rated making capacity as per IEC 60947-3		Α	800
Rated breaking capacity cos φ to IEC 60947-3		Α	
230 V		Α	520
400/415 V		Α	600
500 V		Α	480
690 V		A	340
Safe isolation to EN 61140		, ·	
between the contacts		V AC	440
Current heat loss per contact at I <sub>e</sub>		W	4.5
Current heat loss per auxiliary circuit at I <sub>e</sub> (AC-15/230 V)		CO	4.5
Lifespan, mechanical	Operations	x 10 <sup>6</sup>	> 0.5
Maximum operating frequency	Operations/h		1200
AC			
AC-3			
Rating, motor load switch	P	kW	
220 V 230 V	P	kW	15
230 V Star-delta	P	kW	18.5
400 V 415 V	P	kW	22
400 V Star-delta	P	kW	30
500 V	P	kW	22
500 V Star-delta	P	kW	37
690 V	P	kW	15
690 V Star-delta	P	kW	22
Rated operational current motor load switch			
230 V	I <sub>e</sub>	Α	51
230 V star-delta	I <sub>e</sub>	Α	63
400V 415 V	I <sub>e</sub>	A	41
400 V star-delta	I <sub>e</sub>	A	63
500 V			
	l <sub>e</sub>	A	33
500 V star-delta	l <sub>e</sub>	Α	57.2
690 V	l <sub>e</sub>	Α	17
690 V star-delta	I <sub>e</sub>	Α	29.4
AC-21A			
Rated operational current switch			
440 V	I <sub>e</sub>	Α	63

AC-23A			
Motor rating AC-23A, 50 - 60 Hz	P	kW	
230 V	P	kW	18.5
400 V 415 V	P	kW	30
500 V	P	kW	22
690 V	Р	kW	22
Rated operational current motor load switch			
230 V	I <sub>e</sub>	Α	63
400 V 415 V	I <sub>e</sub>	Α	63
500 V	l <sub>e</sub>	Α	33
690 V	I <sub>e</sub>	Α	23.8
DC			
DC-1, Load-break switches L/R = 1 ms			
Rated operational current	l <sub>e</sub>	Α	63
Voltage per contact pair in series		٧	60
DC-23A, motor load switch L/R = 15 ms			
24 V			
Rated operational current	I <sub>e</sub>	Α	50
Contacts	,	Quantity	
48 V		200	
Rated operational current		A	50
	I <sub>e</sub>		
Contacts		Quantity	2
60 V			
Rated operational current	l <sub>e</sub>	Α	50
Contacts		Quantity	3
120 V			
Rated operational current	le	Α	25
Contacts		Quantity	3
240 V			
Rated operational current	I <sub>e</sub>	Α	20
Contacts	•	Quantity	6
DC-13, Control switches L/R = 50 ms		Quantity	
Rated operational current		Α	25
	l <sub>e</sub>		
Voltage per contact pair in series		V	24
Control circuit reliability at 24 V DC, 10 mA	Fault probability	H <sub>F</sub>	$< 10^{-5}$ , $< 1$ fault in 100000 operations
Terminal capacities	, ,		
Solid or stranded		mm <sup>2</sup>	1 x (2,5 - 35)
			2 x (2,5 - 16)
Flexible with ferrules to DIN 46228		mm <sup>2</sup>	1 x (1 - 25) 2 x (1.5 - 10)
Terminal corous			
Terminal screw		N	M6
Max. tightening torque		Nm	4
Technical safety parameters:  Notes			B10 <sub>d</sub> values as per EN ISO 13849-1, table C1
Rating data for approved types			o rog values as per Liviso 19045-1, table of
Contacts			
Rated operational voltage	U <sub>e</sub>	V AC	600
	O <sub>e</sub>	V AU	000
Rated uninterrupted current max.			
Main conducting paths			
General use	lu	Α	63
Switching capacity			
Maximum motor rating			
Single-phase			
120 V AC		НР	3
200 V AC		НР	7.5

240 V AC	HP	10
Three-phase		
200 V AC	HP	15
240 V AC	HP	15
480 V AC	HP	40
600 V AC	HP	40
Short Circuit Current Rating	SCCR	
High fault rating	kA	10
max. Fuse	Α	100, Class J
Terminal capacity		
Solid or flexible conductor with ferrule	AWG	12 - 4
Terminal screw		M6
Tightening torque	lb-in	35.4

# Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	63
Heat dissipation per pole, current-dependent	P <sub>vid</sub>	W	4.5
Equipment heat dissipation, current-dependent	P <sub>vid</sub>	W	0
Static heat dissipation, non-current-dependent	P <sub>vs</sub>	W	0
Heat dissipation capacity	P <sub>diss</sub>	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	50
EC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects $$			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Please enquire
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switch gear must observed. $\label{eq:controller}$
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switch gear must be observed.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

#### **Technical data ETIM 6.0**

Low-voltage industrial components (EG000017) / Off-load switch (EC001105)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Off-load switch, circuit breaker, control switch / Changeover switch (ecl@ss8.1-27-37-14-05 [AKF062010])

Model		Turnaround star-delta switch
Number of poles		3
With 0 (off) position		Yes
With retraction in 0-position		No
Rated permanent current lu	Α	63
Rated operation current le  at AC-3, 400 V	Α	41
Rated operation power at AC-3, 400 V	kW	37
Degree of protection (IP), front side		IP65
Number of auxiliary contacts as normally closed contact		0
Number of auxiliary contacts as normally open contact		0
Number of auxiliary contacts as change-over contact		0
Suitable for ground mounting		Yes
Suitable for front mounting 4-hole		No
Suitable for distribution board installation		No
Suitable for intermediate mounting		Yes
Complete device in housing		No
Type of control element		Toggle
Type of electrical connection of main circuit		Screw connection

### **Approvals**

UL File No.  E36332  UL Category Control No.  NLRV  CSA File No.  12528  SON Class No.  Solveth America Certification  Suitable for  E36332  UL listed, CSA certified  Branch circuits, suitable as motor disconnect		
DL Category Control No.  NLRV  CSA File No.  12528  CSA Class No.  3211-05  North America Certification  UL listed, CSA certified  Branch circuits, suitable as motor disconnect	Product Standards	UL 508; CSA-C22.2 No. 14-05; CSA-C22.2 No. 94; IEC/EN 60947-3; CE marking
CSA File No.  12528 CSA Class No.  3211-05  North America Certification  UL listed, CSA certified  Branch circuits, suitable as motor disconnect	UL File No.	E36332
SSA Class No. 3211-05 North America Certification UL listed, CSA certified Suitable for Branch circuits, suitable as motor disconnect	UL Category Control No.	NLRV
North America Certification  UL listed, CSA certified  Branch circuits, suitable as motor disconnect	CSA File No.	12528
Suitable for Branch circuits, suitable as motor disconnect	CSA Class No.	3211-05
	North America Certification	UL listed, CSA certified
Degree of Protection IEC: IP65; UL/CSA Type 1, 12	Suitable for	Branch circuits, suitable as motor disconnect
	Degree of Protection	IEC: IP65; UL/CSA Type 1, 12

## **Dimensions**

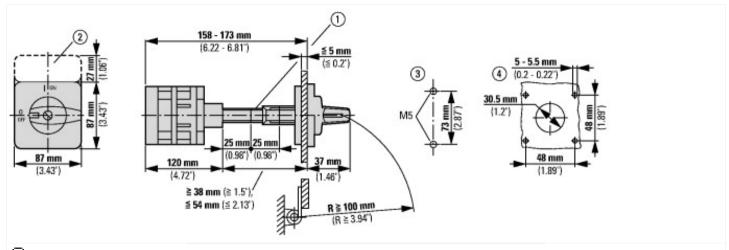

- Shaft extension with ZAV-P3 possible, max. 4 x 25 = 100 mm
- 2 ZFS-... Label mount not included as standard
- (3) Drilling dimensions base

 $\overbrace{\textbf{4}}^{\text{Drilling dimensions door}}$  Cam switches T5B and T5 are of identical design, only their contacts are different

#### Additional product information (links)

Traditional product initial	
IL03801009Z (AWA1150-1692) Cam switches: sv	witch-disconnectors
IL03801009Z (AWA1150-1692) Cam switches: switch-disconnectors	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03801009Z2016_07.pdf
Display flip catalog page.	http://ecat.moeller.net/flip-cat/?edition=K115A&startpage=145
Technical overview cam switch, switch-disconnector	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.2

System overview cam switch T	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.4
System overview switch-disconnector P	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.6
Key to part numbers Cam switch	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.8
Key to part numbers Switch-disconnector	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.8
Switches for ATEX	http://www.coopercrouse-hinds.eu/en/products/25-ex-safety-and-main-current-switches.html