DATASHEET - P3-100/I5



On-Off switch, 3 pole, 100 A, surface mounting

Part no. P3-100/I5 Catalog No. 207381

EL-Nummer (Norway) 0001456131



Delivery program

Product ranging Part group reference acceptance to recent a conductor fitted by user. Auxiliary contacts NVC Production recent of the day user. Production rece	Delivery program			
with black thumb give and from plate Auxiliary contact a required supplied Number of poles Auxiliary contacts Degree of Protection Design Contact sequence Contact sequence Switching angle Frost plate no. Motor rating AC-23A, 50 - 60 Hz 400 V Red Auxiliary contact or required conductor fitted by user. Auxiliary contact or required conductor fitted by user. Auxiliary contact or required content of fitted by user. Auxiliary contact or required content of fitted by user. Auxiliary contact or required content of fitted by user. Auxiliary contact or required content of fitted by user. Auxiliary contact or required content of fitted by user. Auxiliary contact or required content of fitted by user. Auxiliary contact or required content of fitted by user. Auxiliary contact or required content of fitted by user. Auxiliary contact or required content of fitted by user. Auxiliary contact or required content of fitted by user. Auxiliary contact or required content of fitted by user. Auxiliary contact or required content of fitted by user. Auxiliary contact or required content of fitted by user. Auxiliary contact or required content or required con	Product range			On-Off switch
Information about equipment supplied Number of poles Auxiliary contacts NO Degree of Protection Design Contact sequence Contact sequence Switching angle Front plate na. Motor reting AC-23A, 50-60 Hz 400 V Rated uninterrupted current Auxiliary contact or neutral conductor fitted by user. Possible Transport of the desired or neutral conductor fitted by user. Possible Transport of the desired or neutral conductor fitted by user. Possible Transport of the desired or neutral conductor fitted by user. Possible Transport of the desired or neutral conductor fitted by user. Possible Transport of the desired or neutral conductor fitted by user. Possible Transport of the desired or neutral conductor fitted by user. Possible Transport of the desired or neutral conductor fitted by user. Possible Transport of the desired or neutral conductor fitted by user. Possible Transport of the desired or neutral conductor fitted by user. Possible Transport of the desired or neutral conductor fitted by user. Possible Transport	Part group reference			P3
Number of poles Auxiliary contacts No Degree of Protection Design Contact sequence Contact sequence Socioching angle Front plate no. Motor rating AC-23A, 50 - 60 Hz 400 V P Rated uninterrupted current Auxiliary contacts NO Design PES Itotally insulated Souries emounting L1 L2 L3 L3 L5 L2 L4 8 T1 T2 T3 DESTRUCTION OFF FS 908 Motor rating AC-23A, 50 - 60 Hz 400 V P KW 55 Rated uninterrupted current L3 L0				with black thumb grip and front plate
Auxiliary contacts Not	Information about equipment supplied			Auxiliary contact or neutral conductor fitted by user.
No No No No No No No No	Number of poles			3 pole
Design Contact sequence Switching angle Front plate no. Motor rating AC-23A, 50 - 60 Hz 400 V P Red with sequence Root Root	Auxiliary contacts			
Degree of Protection Design Contact sequence Contact sequence Switching angle Front plate no. Motor rating AC-23A, 50 - 60 Hz 400 V P NW 55 Rated uninterrupted current PES Itotally insulated Itota			N/0	0
Design Contact sequence Switching angle Front plate no. Motor rating AC-23A, 50 - 60 Hz 400 V Rated uninterrupted current Applications a large and a large sequence and a	7		N/C	0
Design Surface mounting Contact sequence Cont	Degree of Protection			IP65
Contact sequence L1				totally insulated
Switching angle Front plate no. Value Val	Design			surface mounting
Switching angle Front plate no. Value Val				
Front plate no. Found Front Fro	Contact sequence			$ \begin{array}{c c} & 1 & 13 & 15 \\ \hline & 2 & 4 & 6 \\ \hline & T1 & T2 & T3 \\ \hline & \times \times \times \times \end{array} $
Motor rating AC-23A, 50 - 60 Hz	Switching angle		o	90
400 V P kW 55 Rated uninterrupted current I _u A 100	Front plate no.			O_OFF
400 V P kW 55 Rated uninterrupted current I _u A 100	Motor rating AC-23A, 50 - 60 Hz			
	400 V	P	kW	55
Note on rated uninterrupted current I _u is specified for max. cross-section.	Rated uninterrupted current	Iu	Α	100
	Note on rated uninterrupted current !u			Rated uninterrupted current I_u is specified for max. cross-section.

Technical data

Standards	IEC/EN 60947, VDE 0660, IEC/EN 60204, CSA, UL Switch-disconnector according to IEC/EN 60947-3

Ambient temperature Enclosed Overvoltage category/pollution degree Rated impulse withstand voltage Mechanical shock resistance Mounting position Contacts Mechanical variables Number of poles Auxiliary contacts N/O Electrical characteristics NAC CONTACT Damp heat, cyclic, to IEC 60068-2-30 III/3 A 5 - 25 - +40 III/3 A 6000 A 8 required A 8 required A 9 15 A 9	
Overvoltage category/pollution degree Rated impulse withstand voltage Mechanical shock resistance Mounting position Contacts Mechanical variables Number of poles Auxiliary contacts N/O Electrical characteristics	
Rated impulse withstand voltage Mechanical shock resistance Mounting position Contacts Mechanical variables Number of poles Auxiliary contacts N/0 0 Relectrical characteristics	
Mechanical shock resistance Mounting position Contacts Mechanical variables Number of poles Auxiliary contacts N/O 0 Electrical characteristics	
Mounting position Contacts Mechanical variables Number of poles Auxiliary contacts N/O 0 Electrical characteristics As required As required No poly poly poly poly poly poly poly pol	
Contacts Mechanical variables Number of poles Auxiliary contacts N/0 0 N/C 0 Electrical characteristics	
Mechanical variables 3 pole Number of poles 3 pole Auxiliary contacts N/O N/O 0 N/C 0 Electrical characteristics Image: Contact of the policy of	
Number of poles 3 pole Auxiliary contacts N/O 0 N/C 0 N/C 0	
Auxiliary contacts N/O 0 N/C 0 N/C 0 Electrical characteristics O <th< td=""><td></td></th<>	
N/O 0 N/C 0 Electrical characteristics	
N/C 0 Electrical characteristics	
Electrical characteristics	
Rated operational voltage U _e V AC 690	
Rated uninterrupted current I _u A 100	
Note on rated uninterrupted current I _u Rated uninterrupted current I _u is specified for max. cross-section.	
Load rating with intermittent operation, class 12	
AB 25 % DF x I _e 2	
AB 40 % DF x I _e 1.6	
AB 60 % DF x I _e 1.3	
Short-circuit rating Short-cir	
Fuse A gG/gL 100	
Rated short-time withstand current (1 s current) I _{cw} A _{rms} 2000	
Note on rated short-time withstand current lcw Current for a time of 1 second	
Rated conditional short-circuit current $I_q kA$	
Switching capacity	
cos φ rated making capacity as per IEC 60947-3 A 950	
Rated breaking capacity cos φ to IEC 60947-3	
230 V A 760	
400/415 V A 740 500 V A 880	
690 V A 520	
Safe isolation to EN 61140	
between the contacts V AC 440	
Current heat loss per contact at I _e W 7.5	
Lifespan, mechanical Operations $\frac{10^6}{10^6} > 0.1$	
× 10	
Maximum operating frequency Operations/h 1200	
AC AC A	
AC-3 Rating, motor load switch P kW	
220 V 230 V P kW 22	
400 V 415 V P kW 37	
500 V P kW 45	
690 V P kW 37	
Rated operational current motor load switch	
230 V I _e A 71	
400V 415 V I _e A 71	
500 V I _e A 65	
690 V I _e A 23.8	
AC-21A	
Rated operational current switch	
440 V I _e A 100	
AC-23A	

Motor rating AC-23A, 50 - 60 Hz	Р	kW	
230 V	P	kW	30
400 V 415 V	P	kW	55
500 V	P	kW	55
690 V	Р	kW	55
Rated operational current motor load switch			
230 V	l _e	Α	100
400 V 415 V	I _e	Α	100
500 V	I _e	A	96
690 V	l _e	Α	68
DC			
DC-1, Load-break switches L/R = 1 ms			
Rated operational current	le	Α	100
Voltage per contact pair in series		V	60
DC-23A, motor load switch L/R = 15 ms			
24 V			
Rated operational current	l _e	Α	50
Contacts		Quantity	1
48 V			
Rated operational current	le	Α	50
Contacts		Quantity	
60 V			
	I _e	Α	50
Contacts	·e	Quantity	
120 V		Quantity	2
Rated operational current		Α	25
	I _e		
Contacts		Quantity	
Control circuit reliability at 24 V DC, 10 mA	Fault probability	H _F	$< 10^{-5}$, < 1 fault in 100000 operations
Terminal capacities			
Solid or stranded		mm ²	1 x (2,5 - 35)
			2 x (2,5 - 10)
Flexible with ferrules to DIN 46228		mm ²	1 x (1.5 - 25) 2 x (1.5 - 6)
Terminal screw			M5
Tightening torque for terminal screw		Nm	3
Technical safety parameters:			
Notes			B10 _d values as per EN ISO 13849-1, table C1
Rating data for approved types			
Contacts			
Rated operational voltage	Ue	V AC	600
Rated uninterrupted current max.			
Main conducting paths			
General use		Α	100
Notes			If used with neutral conductor: I _U = max. 90 A
Auxiliary contacts			
General Use	lυ	Α	10
Pilot Duty	J		A 600
			P 600
i ilot Duty			
Switching capacity			
Switching capacity			
Switching capacity Maximum motor rating		НР	5
Switching capacity Maximum motor rating Single-phase		HP HP	5 10
Switching capacity Maximum motor rating Single-phase 120 V AC			
Switching capacity Maximum motor rating Single-phase 120 V AC 200 V AC 240 V AC		НР	10
Switching capacity Maximum motor rating Single-phase 120 V AC 200 V AC		НР	10

240 V AC	HP	25
480 V AC	HP	60
600 V AC	HP	75
Short Circuit Current Rating	SCCR	
Basic Rating	kA	10
max. Fuse	Α	150
Terminal capacity		
Solid or flexible conductor with ferrule	AWG	14 - 2
Terminal screw		M5
Tightening torque	lb-in	26.5

Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	100
Heat dissipation per pole, current-dependent	P _{vid}	W	7.5
Equipment heat dissipation, current-dependent	P _{vid}	W	0
Static heat dissipation, non-current-dependent	P _{vs}	W	0
Heat dissipation capacity	P _{diss}	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	40
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			UV resistance only in connection with protective shield.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switch gear must be observed. $\label{eq:constraint}$
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switch gear must be observed. $\label{eq:constraint}$
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Switch disconnector (EC000216)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Off-load switch, circuit breaker, control switch / Switch disconnector (ecl@ss10.0.1-27-37-14-03 [AKF060013])


[AKF060013])		
Version as main switch	No	
Version as maintenance-/service switch	No	
Version as safety switch	No	

Version as emergency stop installation		No
Version as reversing switch		No
Number of switches		1
Max. rated operation voltage Ue AC	V	690
Rated operating voltage	V	690 - 690
Rated permanent current lu	Α	100
Rated permanent current at AC-23, 400 V	Α	100
Rated permanent current at AC-21, 400 V	Α	100
Rated operation power at AC-3, 400 V	kW	37
Rated short-time withstand current lcw	kA	2
Rated operation power at AC-23, 400 V	kW	55
Switching power at 400 V	kW	55
Conditioned rated short-circuit current Iq	kA	4
Number of poles		3
Number of auxiliary contacts as normally closed contact		0
Number of auxiliary contacts as normally open contact		0
Number of auxiliary contacts as change-over contact		0
Motor drive optional		No
Motor drive integrated		No
Voltage release optional		No
Device construction		Complete device in housing
Suitable for ground mounting		Yes
Suitable for front mounting 4-hole		No
Suitable for front mounting centre		No
Suitable for distribution board installation		No
Suitable for intermediate mounting		No
Colour control element		Black
Type of control element		Toggle
Interlockable		No
Type of electrical connection of main circuit		Screw connection
Degree of protection (IP), front side		IP65
Degree of protection (NEMA)		Other

Approvals

North America Certification For UL/CSA certification order article number 255902

Dimensions

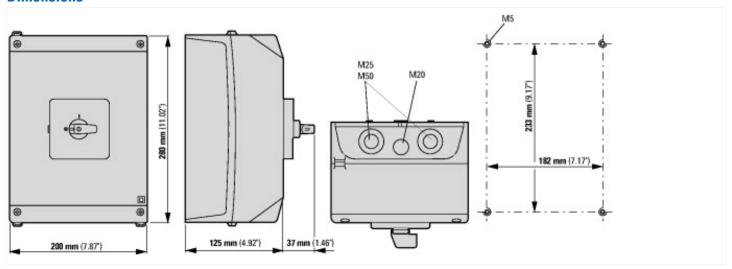

Assets (links)

Declaration of CE Conformity

00003104

Instruction Leaflets

IL03801010Z2018_05