

Data sheet | Item number: 2002-423/000-006

Continuous jumper; from 1 to 3; insulated; blue

www.wago.com/2002-423_000-006



Picture differs from the item.

RoHS 
Compliant

[BOMcheck.net](https://www.bomcheck.net)

Color: 

Data

Electrical data

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

**Ratings per IEC/EN 60664-1**

Nominal voltage (III/3)	800 V
Rated surge voltage (III/3)	8 kV
Rated current	25 A

Geometrical Data

Width	10.9 mm / 0.429 inch
Height	18.5 mm / 0.728 inch
Depth	4.1 mm / 0.161 inch

Material Data

Color	blue
Weight	0.9 g

Commercial data

Packaging type	bag
Country of origin	DE
GTIN	4055143690959
Customs tariff number	85366990990

Counterpart**Downloads****Documentation****Bid Text**

2002-423/000-006 GAEB X81 - Datei	Feb 19, 2019	xml 2.6 kB	Download
2002-423/000-006 doc - Datei	Apr 27, 2017	doc 24.1 kB	Download
Additional Information Technical explanations	Apr 3, 2019	pdf 2.1 MB	Download

Subject to changes. Please also observe the further product documentation!



CAD/CAE-Data

CAE data


EPLAN Data Portal 2002-423/000-006	URL	Download
WSCAD Universe 2002-423/000-006	URL	Download
ZUKEN Portal 2002-423/000-006	URL	Download

CAD data

2D/3D Models 2002-423/000-006	URL	Download
-------------------------------	-----	----------

Installation Notes


Commoning

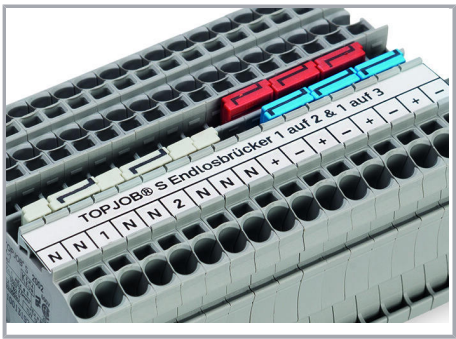

The 1-to-3 adjacent jumper for continuous commoning enables every other terminal block to be commoned. For example, positive and negative potentials can be accommodated alongside each other.

Commoning

Subject to changes. Please also observe the further product documentation!

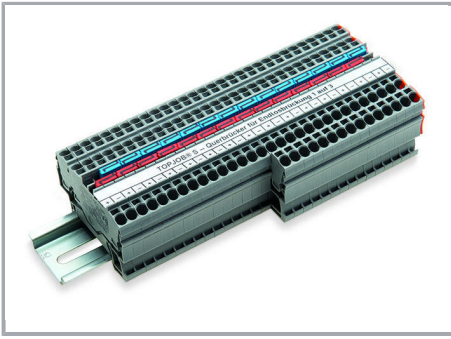

By combining a 1-to-2 continuous jumper with a 1-to-3 adjacent jumper, various commoning applications can be performed in just one jumper slot.

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.