

#### HY-EUDM0011 DALI Dimmer Switch

### 1) Product Features:

HY-EUDM0011 is a standard DALI dimmer which is compatible with DALI control system or stand alone use with DALI drivers.

The dimming range is 1-100%, the minimum brightness can be preset, and the switch can be turned off.

It's Built-in on/off and rotary knob dimming control with Over-Voltage/ Overload Protections. And Nice dimming compatible with DALI control gears and Memory function for dimming level. Support to set single address, group address, broadcast address or scene address via dip switch.



# 2) Technical Specifications:

1. Operating Voltage: 220-240VAC 50Hz


2. Stand-by power:<0.5W

3. ECG Max control: 26

4. Output current: 52mA


5. Operating Temperature: -20~+40°C

6. Dimensions (L\*W\*H): 83.5\*83.5\*44mm

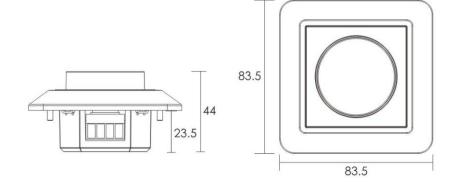


#### Method 1: A single DALI group configuration

The DALI dimmer can control On/Off and dimming for a group of DALI drivers without DALI controller and DALI PS (Set DIP to broadcast)



## Method 2: A typical DALI configuration

The dimmer can be set to Group 1 or 2 through the DIP so as to control  ${\sf G1}$  or  ${\sf G2}$ 

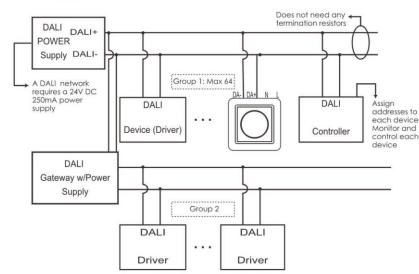

Hoya Lighting Co.,Ltd

Address: 4th Floor, Xinbaoyi Building, Zhongtingbei Road, Houting Village, Shajing Street, Bao'an District, Shenzhen, China Website: www.hoyalighting.com E-mail:sales@hoyalighting.com