

ELECTRIC SAUNA HEATER HARVIA CILINDRO PLUS SPOT

item number: HPP700400SP / HPP900400SP

models: PP70SP / PP90SP

HARVIA

Sauna & Spa



An impressive pillar heater with wireless control switch

- Wireless: no wires or visible sensor components
- Easy to use: illuminated one push button – simply the functions you need every day
- The signal LED lights indicate operating mode or possible error condition
- Enables switching the heater on or off with just one touch
- The splash-proof control switch can be installed inside the sauna or the washroom, in the immediate vicinity of the heater
- The radio signal range is 5-10 meters (depending on the wall structures)
- The heater's on- time can be adjusted (2h/4h/6h)
- Replaceable battery (lifetime ~5 years)

Technical data

Use	Medium sized saunas in domestic use
Control type	SPOT (with a wireless digital switch and integrated manual thermostat)
Sauna room volume (m3)	6-8 m ³ (PP70SP) 8-14 m ³ (PP90SP)
Output (kW)	6,8 kW (PP70SP) 9 kW (PP90SP)
Supply voltage (V)	400 V 3N
Fuse (A)	3x10 (PP70SP) 3x16 (PP90SP)
Weight (kg)	11,5 kg (PP70SP) 12,5 kg (PP90SP)
Stone capacity	90 kg (Ø 5–10 cm, AC3000)
Protection class (IPxx)	IPX4

Dimensions

Space requirements (Width x Depth x height)	510 x 510 x 1800 mm
Height	1020 mm
Width	310 mm
Depth	310 mm
Safety distance (sides)	100 mm
Safety distance (top)	880 mm
Safety distance (bottom)	20 mm

ELECTRIC SAUNA HEATER HARVIA CILINDRO PLUS SPOT

item number: HPP700400SP / HPP900400SP

models: PP70SP / PP90SP



Accessories



Safety railing HPP3 /
Illuminated safety railing HPP3L



Protective sheath HPP11



Embedding flange HPC1





Embedding flange HPC2



Illuminated embedding flange HPC2L

Spare parts

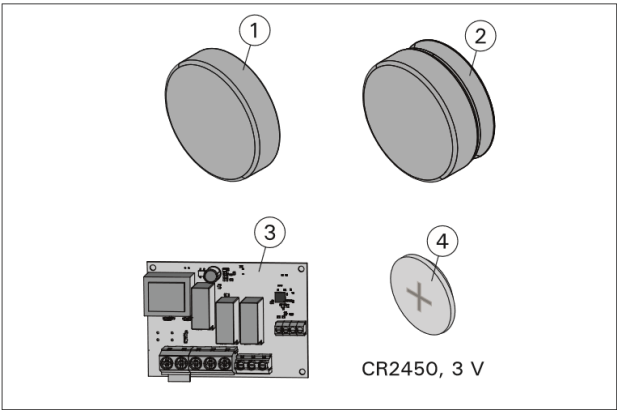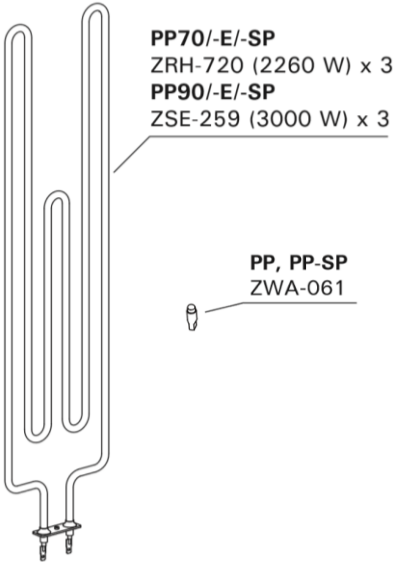

1	Kansi	Cover	WX664
2	Kokonainen painike	Complete wireless switch	WX667
3	Piirikortti	Circuit board	WX663
4	Paristo Renata +85 °C	Battery Renata +85 °C	WX662