

Technical data sheet

FireBox with plug-in seals, single terminals

Item no. 7205744



Connection box with soft plug-in seals. Sufficiently large wiring compartment through diagonally-arranged connection unit with completely pre-mounted, high temperature-resistant ceramic terminals. Green and yellow labelled protective conductor terminal. Fastening on easily accessible external flaps. Approved for cable systems that maintain the electrical function according to DIN 4102 Part 12 with the classes E30, E60 and E90.

Including 2 x MMSplus P 6x35 screw ties.




PP Polypropylene

Master data

Item no.	7205744
Type	T250ED 16A
Description 1	Junction box
Description 2	for function maintenance
Dimension	240x190x95
Colour	Pastel orange
RAL number	2003
Material	Polypropylene
Material symbol	PP
Smallest sales unit (VG)	1,00 Piece
Weight	92,92 kg/100 pc.

Technical data

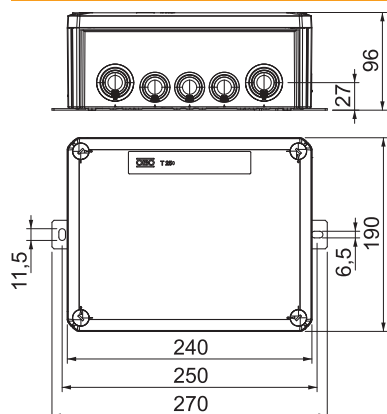

Length	240,00 mm
Width	190,00 mm
Height	95,00 mm
Clear internal dimensions	225x173x86 mm
Dimension L	240,00 mm
Dimension B	190,00 mm
Dimension H	95,00 mm
Dimension L1	250,00 mm
Dimension L2	270,00 mm
Dimension LxWxH	240x190x95 mm
Dimension	240x190x95 mm
Expandable	□
Number of terminals	5,00
Type of housing penetration	Cuttable stepped membrane
Equipment	Terminal
Cover	Not transparent

Technical data sheet

FireBox with plug-in seals, single terminals

Item no. 7205744



Technical data

Cover fastening	Screwed
Entries	9 x M25 7 x M32
Entry from rear	☐
Explosion-tested version	☐
Shape	Rectangular
Function maintenance (ETIM)	E 90
For Ex zone	Without
For Ex zone gas	Without
For Ex zone dust	Without
Halogen-free	☒
With screening	☐
with lid	Yes
With cover	☒
Installation type	Surface-mounted
Nominal cross section	16,00 mm ²
Nominal voltage	660,00 V
Protection rating	IP66
Sealable	☐
Impact-resistant	☐
Transparent lid	☐
Weatherproof	☐