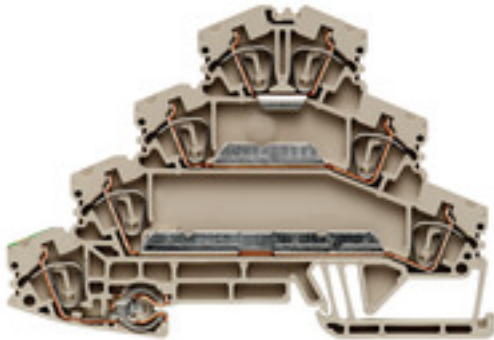


ZMAK 2.5**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image****Power distribution**

You safely and efficiently distribute electricity to the power consumers with our W-Series feed-through terminal blocks and our optimised WPD phase distribution blocks.

General ordering data

Version	Motor-connection terminal, Tension-clamp connection, 2.5 mm ² , 400 V, dark beige
Order No.	1768000000
Type	ZMAK 2.5
GTIN (EAN)	4032248117376
Qty.	25 pc(s).

ZMAK 2.5**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	69.5 mm	Depth (inches)	2.736 °C
Depth including DIN rail	70 mm	Height	102 mm
Height (inches)	4.016 °C	Width	5.1 mm
Width (inches)	0.201 °C	Net weight	22.38 g

Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-50
Continuous operating temp., max.	120		

Material data

Material	Wemid	Colour	dark beige
UL 94 flammability rating	V-0		

System specifications

Version	Tension-clamp connection, With PE connection, One end without connector	End cover plate required	Yes
Number of levels	4	Number of clamping points per level	2
Number of potentials per tier	1	Levels cross-connected internally	No
PE connection	Yes	Rail	TS 35

Additional technical data

Explosion-tested version	No	Installation advice	Direct mounting
Number of similar terminals	1	Open sides	right
Type of mounting	Snap-on		

CSA rating data

Certificate No. (CSA)	200039-1152892	Current size D (CSA)	25 A
Voltage size D (CSA)	300 V	Wire cross section max. (CSA)	12 AWG
Wire cross section min. (CSA)	26 AWG		

Conductors for clamping (rated connection)

Blade size	0.6 x 3.5 mm	Clamping range, max.	4 Nm
Clamping range, min.	0.13 Nm	Connection direction	top
Gauge to IEC 60947-1	A3	Number of connections	7
Stripping length	10 mm	Type of connection	Tension-clamp connection
Wire connection cross section, finely stranded, max.	4 Nm	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	2.5 Nm
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	0.5 Nm	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	2.5 Nm
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	0.5 Nm	Wire connection cross-section, solid core, max.	4 Nm
Wire connection cross-section, solid core, min.	0.5 Nm		

ZMAK 2.5

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

General

Installation advice	Direct mounting	Rail	TS 35
Standards	IEC 60947-7-1 (-7-2)		

Rating data

Rated cross-section	2.5 Nm	Rated voltage	400 V
Rated current	24 A	Current at maximum wires	31 A
Standards	IEC 60947-7-1 (-7-2)	Volume resistance according to IEC 60947-7-x	1.33 °C
Rated impulse withstand voltage	6 kV	Power loss in accordance with IEC 60947-7-x	0.77 W
Pollution severity	3	Surge voltage category	III

UL rating data

Certificate No. (UR)	E60693	Conductor size Factory wiring max. (UR)	12 AWG
Conductor size Factory wiring min. (UR)	26 AWG	Conductor size Field wiring max. (UR)	12 AWG
Conductor size Field wiring min. (UR)	26 AWG	Current size B (UR)	25 A
Current size D (UR)	10 A	UL_current_Print	25 A
UL_voltage_Print	300 V	UL_wire_max_Print	12 A / 6 A / 10 A / 13 A / 15 A
UL_wire_min_Print	26 A / 6 A / 10 A / 13 A / 15 A	Voltage size B (UR)	300 V
Voltage size D (UR)	300 V		

Classifications

ETIM 6.0	EC000897	ETIM 7.0	EC000897
ETIM 8.0	EC000897	ECLASS 9.0	27-14-11-20
ECLASS 9.1	27-14-11-20	ECLASS 10.0	27-14-11-20
ECLASS 11.0	27-14-11-20		

Approvals

Approvals



ROHS	Conform
UL File Number Search	E60693

Downloads

Approval/Certificate/Document of Conformity	EAC certificate Declaration of Conformity Declaration of Conformity all terminals
Engineering Data	EPLAN, WSCAD, Zuken E3.S
User Documentation	StorageConditionsTerminalBlocks
Catalogues	Catalogues in PDF-format
Brochures	

ZMAK 2.5

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Drawings

