


Jupiter Pro 2200 40° 2370lm 4000K Ra>90 DALI

Article code: **940410**
 EAN: 7021989404101



Light technic

Version: 40°
 Type of light source: LED (not exchangeable)
 Wattage: 22W
 System wattage: 22W
 Luminous flux: 2370lm
 Efficacy: 108 lm/W
 Voltage: 230V
 Colour temperature: 4000K
 Colour rendering (CRI): Ra>90
 MacAdams factor: SDCM: 2
 Lifetime: L90/B10>50,000
 Light distribution: Direct
 Optic: Glass Clear
 Beam angle: 40°

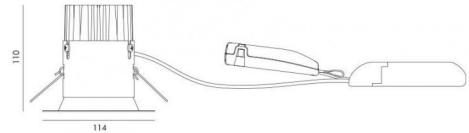

Control/Dimming

Type: DALI

Protection

Luminaire class: Class II SELV
 Ingress protection rating: IP44

Energy and approvals

Energy class: A+
 Approval: CE

Materials and finish

Housing: Aluminium
 Colour: Matte white (RAL 9003)
 Optics: Glass

Mounting/Connection


Mounting: Recessed, Indoor / Outdoor
 Module: 2200
 Plug: Screwless terminal block
 Max. luminaires per circuit breaker: B10: 35, B16: 57, C10: 58, C16: 95

Dimensions (mm)

Height (H): 112
 Diameter (D): 114
 Cut-out: 83
 Ceiling void depth: 110
 Distance to flammable materials: 100mm
 Weight (brutto/netto): 1.08 / 0.9

Packaging

Packing dimensions: 140 x 140 x 140

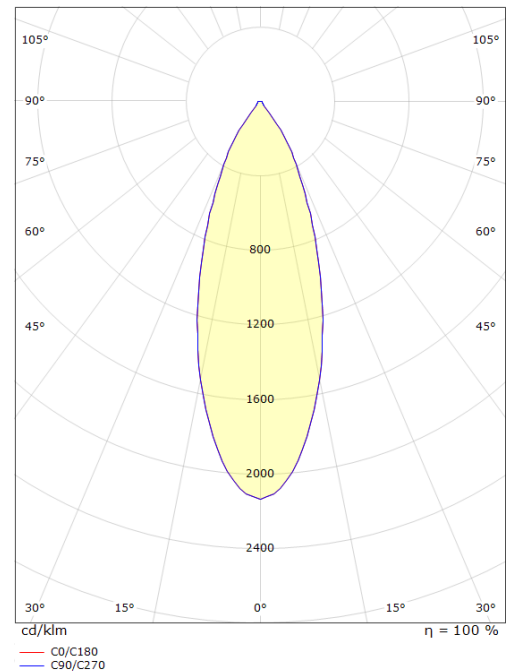

7 0 2 1 9 8 9 4 0 4 1 0 1