

Product Environmental Profile

Acti9 iCV40N RCBO 3P+N





General information

Representative product

Acti9 iCV40N RCBO 3P+N - A9DF3716

Description of the product

The main function of Acti9 iCV40N 3PN RCBO is to protect the installation against overloads and short circuits and protect people and premises at risk of fire or explosion against insulation defects.

Functional unit

Protect during 20 years the installation against overloads and short-circuits and people and premises at risk of fire or explosion against insulation defects in circuit with assigned voltage 400 V AC 50/60 Hz and rated current 16 A. This protection is ensured in accordance with the following parameters:


- Number of poles 3P+N
- Rated breaking capacity 6000 A
- Tripping curve C
- Sensitivity 30 mA
- Type of differential protection A-SI Type



Constituent materials

Reference product mass

585 g including the product, its packaging and additional elements and accessories

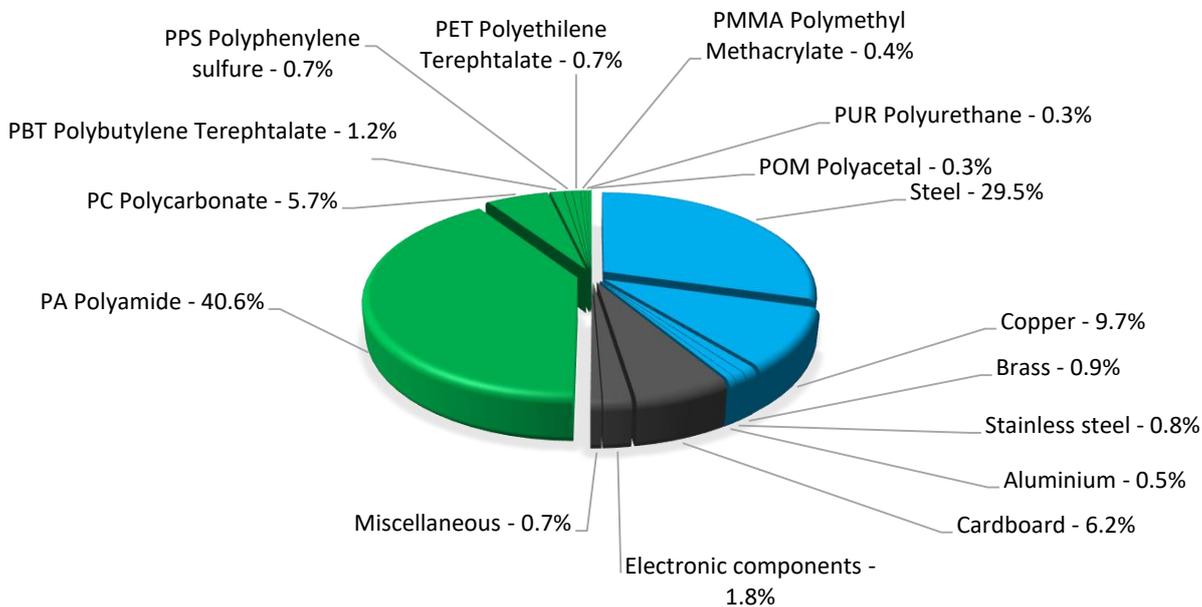

Plastics	49.9%
Metals	41.4%
Others	8.7%



Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate - BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



Additional environmental information

The Acti9 iCV40N RCBO 3P+N presents the following relevant environmental aspects

Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 35.8 g, consisting of cardboard (97.8%), paper (2.2%) Packaging recycled materials is 100% of total packaging mass. Product distribution optimised by setting up local distribution centres
Installation	Ref A9DF3716 does not require any installation operations.
Use	The product does not require special maintenance operations.
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process. Recyclability potential: 41% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).




Environmental impacts

Reference life time	20 years		
Product category	Differential circuit breaker		
Installation elements	The disposal of the packaging material is accounted for 6.12% during the installation phase.		
Use scenario	Load rate: 50% of 16A Use time rate: 30% of RLT		
Geographical representativeness	France		
Technological representativeness	The main function of Acti9 iCV40N 3PN RCBO is to protect the installation against overloads and short circuits and protect people and premises at risk of fire or explosion against insulation defects.		
Energy model used	Manufacturing	Installation	Use
	Energy model used: Spain	Electricity mix; AC; consumption mix, at consumer; 230V; FR	Electricity mix; AC; consumption mix, at consumer; 230V; FR
			End of life
			Electricity mix; AC; consumption mix, at consumer; 230V; FR

Compulsory indicators

Acti9 iCV40N RCBO 3P+N - A9DF3716

Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	4.80E-04	4.68E-04	0*	0*	1.19E-05	0*
Contribution to the soil and water acidification	kg SO ₂ eq	9.93E-02	7.91E-03	3.45E-04	0*	9.09E-02	1.62E-04
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	1.16E-02	3.16E-03	7.94E-05	1.96E-06	8.29E-03	4.67E-05
Contribution to global warming	kg CO ₂ eq	2.82E+01	3.63E+00	7.55E-02	0*	2.44E+01	9.24E-02
Contribution to ozone layer depletion	kg CFC11 eq	3.60E-05	1.09E-06	0*	0*	3.49E-05	3.72E-09
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	6.23E-03	9.25E-04	2.46E-05	0*	5.26E-03	1.67E-05
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m ³	5.79E+02	0*	0*	0*	5.79E+02	0*
Total Primary Energy	MJ	2.28E+03	4.37E+01	1.07E+00	0*	2.23E+03	7.80E-01

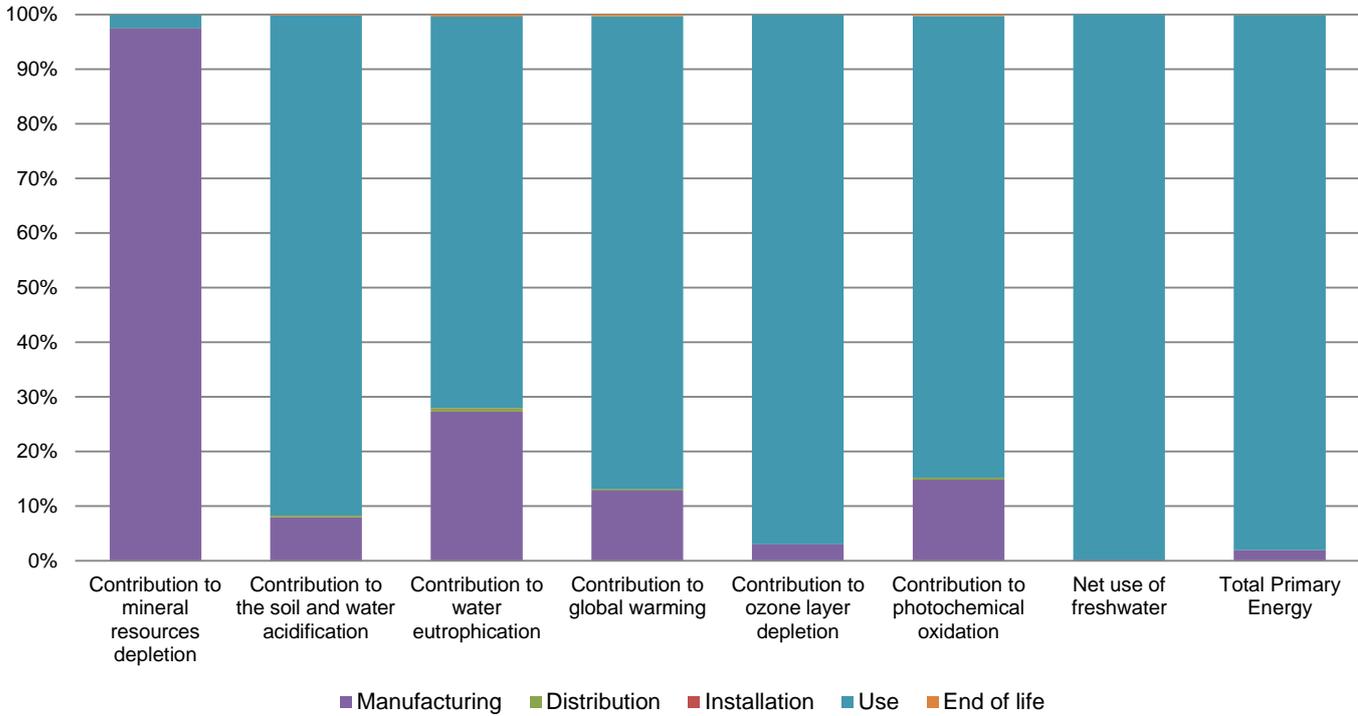

Optional indicators		Acti9 iCV40N RCBO 3P+N - A9DF3716						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Contribution to fossil resources depletion	MJ	3.07E+02	2.42E+01	1.06E+00	0*	2.81E+02	6.27E-01	
Contribution to air pollution	m³	1.61E+03	7.85E+02	3.21E+00	0*	8.14E+02	5.67E+00	
Contribution to water pollution	m³	2.50E+03	1.24E+03	1.24E+01	2.94E-01	1.24E+03	7.00E+00	
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Use of secondary material	kg	2.02E-02	2.02E-02	0*	0*	0*	0*	
Total use of renewable primary energy resources	MJ	1.63E+02	1.20E+00	0*	0*	1.62E+02	0*	
Total use of non-renewable primary energy resources	MJ	2.11E+03	4.25E+01	1.07E+00	0*	2.07E+03	7.79E-01	
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.62E+02	4.87E-01	0*	0*	1.62E+02	0*	
Use of renewable primary energy resources used as raw material	MJ	7.09E-01	7.09E-01	0*	0*	0*	0*	
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2.11E+03	3.53E+01	1.07E+00	0*	2.07E+03	7.79E-01	
Use of non renewable primary energy resources used as raw material	MJ	7.23E+00	7.23E+00	0*	0*	0*	0*	
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Hazardous waste disposed	kg	2.39E+01	2.30E+01	0*	0*	4.61E-02	8.44E-01	
Non hazardous waste disposed	kg	5.29E+01	2.91E+00	0*	0*	5.00E+01	0*	
Radioactive waste disposed	kg	7.39E-01	1.37E-03	0*	0*	7.38E-01	0*	
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Materials for recycling	kg	3.09E-01	5.48E-02	0*	3.56E-02	0*	2.18E-01	
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	
Materials for energy recovery	kg	1.40E-02	0*	0*	0*	0*	1.40E-02	
Exported Energy	MJ	1.13E-04	1.06E-05	0*	1.03E-04	0*	0*	

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

<i>Registration number :</i>	SCHN-00548-V01.01-EN	<i>Drafting rules</i>	PCR-ed3-EN-2015 04 02
<i>Verifier accreditation N°</i>	VH 39	<i>Supplemented by</i>	PSR-0005-ed2-EN-2016 03 29
<i>Date of issue</i>	05/2020	<i>Information and reference documents</i>	www.pep-ecopassport.org
		<i>Validity period</i>	5 years
<i>Independent verification of the declaration and data, in compliance with ISO 14025 : 2010</i>			
<i>Internal</i>		<i>External</i>	X
<i>The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)</i>			
<i>PEP are compliant with XP C08-100-1 :2016</i>			
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »</i>			



Schneider Electric Industries SAS
 Country Customer Care Center
<http://www.schneider-electric.com/contact>
 35, rue Joseph Monier
 CS 30323
 F- 92506 Rueil Malmaison Cedex
 RCS Nanterre 954 503 439
 Capital social 896 313 776 €
www.schneider-electric.com

Published by Schneider Electric

SCHN-00548-V01.01-EN

© 2019 - Schneider Electric – All rights reserved

05/2020