

# Product Environmental Profile

## UNICA SYSTEM+ POLE & POST






## General information

<b>Representative product</b>	UNICA SYSTEM+ POLE & POST - INS45100+INS45018
<b>Description of the product</b>	The main purpose of Cepella pole & post is to offer very flexible installation solutions, bringing power, telecom and data directly from ceiling to the workplaces on all types of floors.
<b>Functional unit</b>	Connect/Disconnect during 20 years the plug of a load consuming 16A under a voltage of 250V while protecting the user from direct contact with live parts and with a protection class IP20 in accordance with the standard IEC 60529. And make available during 20 years a USB A/C connection with 5 V 2.4 A DC output voltage. Service poles and service posts follow IEC 61084-2-4:2017 standards.



## Constituent materials

<b>Reference product mass</b>	19550 g	including the product, its packaging.
-------------------------------	---------	---------------------------------------

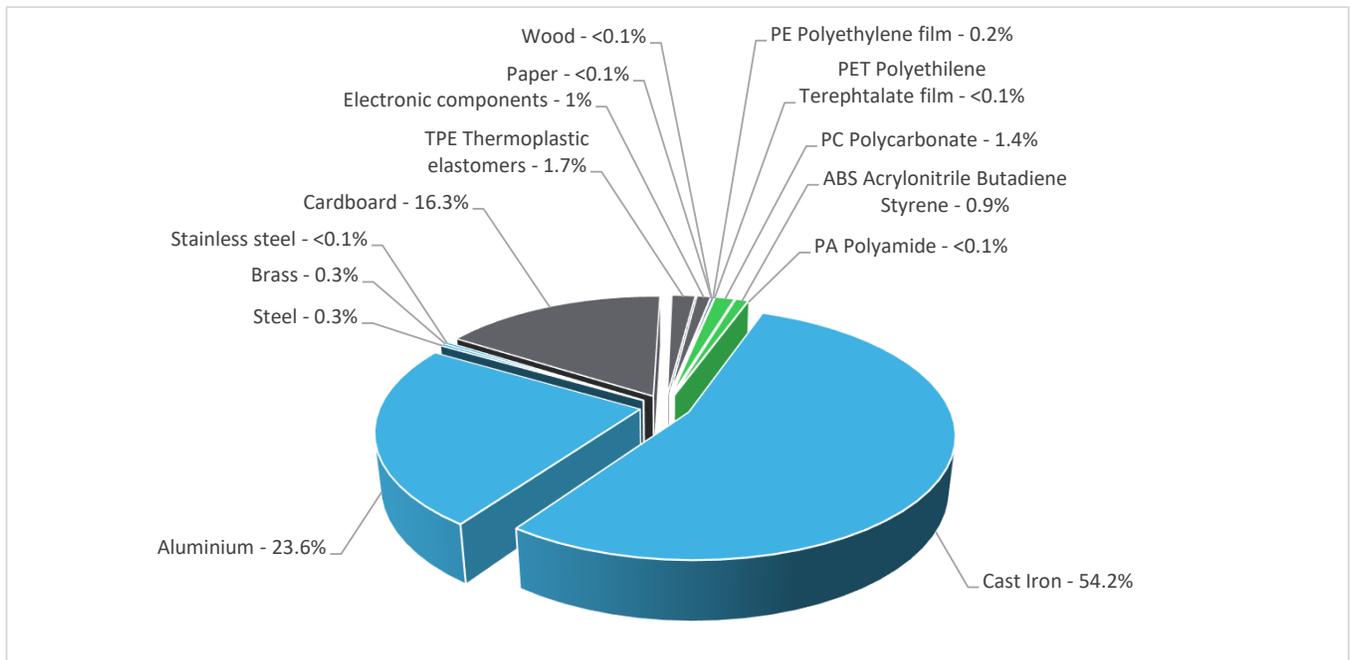

Plastics	2.5%
Metals	78.4%
Others	19.0%



## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate - BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



## Additional environmental information

The UNICA SYSTEM+ POLE & POST presents the following relevant environmental aspects

<b>Manufacturing</b>	Manufactured at a Schneider Electric production site ISO14001 certified
<b>Distribution</b>	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 3268.4 g, consisting of cardboard (98.54%), PE film (1.3%), paper (0.13%), PET film (0.02%), wood (0.01%) Product distribution optimised by setting up local distribution centres
<b>Installation</b>	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted during the installation phase (including transport to disposal).
<b>Use</b>	The product does not require special maintenance operations.
<b>End of life</b>	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials  This product contains electronic card (40.8g) that should be separated from the stream of waste so as to optimize end-of-life treatment.  The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website  <a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a>  Recyclability potential: <b>73%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).




## Environmental impacts

<b>Reference life time</b>	20 years			
<b>Product category</b>	Combination of functions			
<b>Installation elements</b>	No special components needed			
<b>Use scenario</b>	4 Power socket Product dissipation is 0.0352 W @ 100% load rate and 0.352 W @ Load rate: 50% of In & Use rate: 50% of the RLT 2 USB socket Product dissipation is 0.0352 W @ 100% load rate and 0.352 W @ Load rate: 100% of In & Use rate: 30% of the RLT			
<b>Geographical representativeness</b>	Nordic countries			
<b>Technological representativeness</b>	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production.			
<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Manufacturing plant: Wibe-Mora, Sweden	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators		UNICA SYSTEM+ POLE & POST - INS45100+INS45018					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1.01E-03	1.01E-03	0*	0*	2.53E-06	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	4.28E-01	2.89E-01	1.15E-02	7.37E-04	1.21E-01	4.87E-03
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	6.13E-02	4.99E-02	2.65E-03	1.80E-04	7.33E-03	1.19E-03
Contribution to global warming	kg CO <sub>2</sub> eq	1.12E+02	7.79E+01	2.52E+00	1.77E-01	2.91E+01	1.81E+00
Contribution to ozone layer depletion	kg CFC11 eq	1.10E-05	8.99E-06	5.11E-09	0*	1.90E-06	1.12E-07
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	3.36E-02	2.55E-02	8.22E-04	5.51E-05	6.67E-03	5.22E-04

Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	1.06E+02	4.36E-01	0*	0*	1.06E+02	0*
Total Primary Energy	MJ	1.68E+03	1.04E+03	3.57E+01	2.31E+00	5.82E+02	2.46E+01

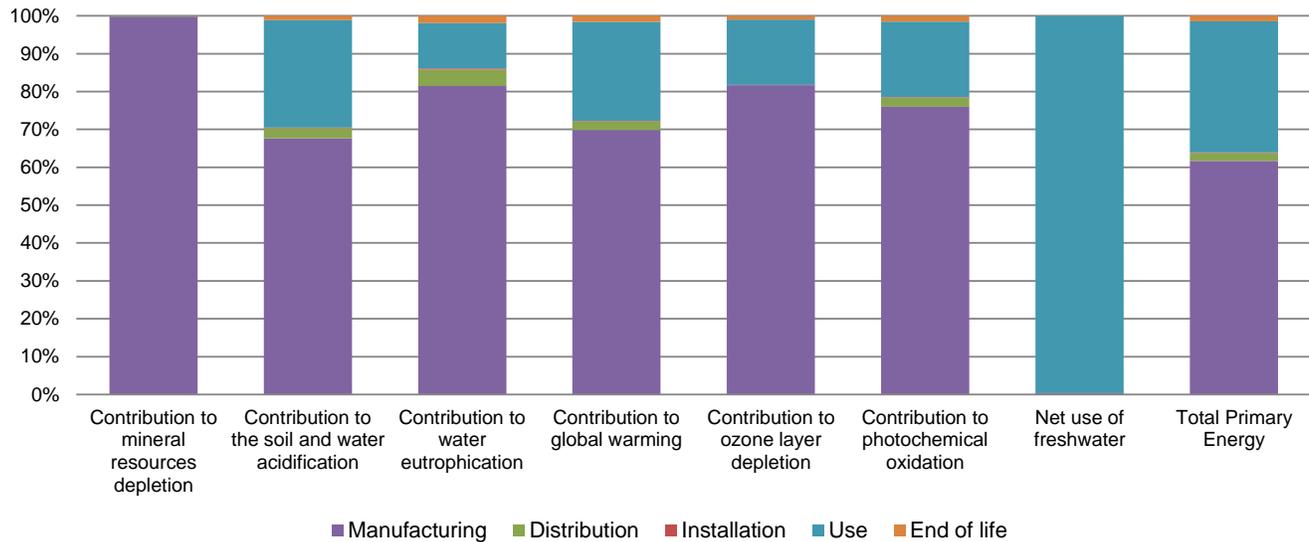

Optional indicators	UNICA SYSTEM+ POLE & POST - INS45100+INS45018						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	1.13E+03	7.38E+02	3.54E+01	2.29E+00	3.31E+02	1.96E+01
Contribution to air pollution	m³	1.08E+04	9.28E+03	1.07E+02	7.07E+00	1.25E+03	1.73E+02
Contribution to water pollution	m³	8.45E+03	6.47E+03	4.15E+02	2.68E+01	1.20E+03	3.38E+02
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	6.62E+00	6.62E+00	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1.68E+02	9.40E+01	4.75E-02	0*	7.39E+01	2.71E-02
Total use of non-renewable primary energy resources	MJ	1.51E+03	9.43E+02	3.56E+01	2.31E+00	5.08E+02	2.46E+01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.04E+02	3.02E+01	4.75E-02	0*	7.39E+01	2.71E-02
Use of renewable primary energy resources used as raw material	MJ	6.38E+01	6.38E+01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.47E+03	9.02E+02	3.56E+01	2.31E+00	5.08E+02	2.46E+01
Use of non renewable primary energy resources used as raw material	MJ	4.06E+01	4.06E+01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	3.57E+01	1.45E+01	0*	0*	1.52E-02	2.12E+01
Non hazardous waste disposed	kg	1.84E+02	7.50E+01	8.96E-02	2.55E-02	1.09E+02	7.52E-02
Radioactive waste disposed	kg	1.32E-01	5.93E-02	6.38E-05	0*	7.25E-02	1.18E-04
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	1.72E+01	1.94E+00	0*	3.25E+00	0*	1.20E+01
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	4.51E-02	0*	0*	0*	0*	4.51E-02
Exported Energy	MJ	1.02E-02	9.59E-04	0*	9.24E-03	0*	0*

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators) except one indicator NUFW is mostly in use phase.

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP2012006_V1	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	12/2020	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
<i>Independent verification of the declaration and data</i>			
Internal	X	External	
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »</i>			

Schneider Electric Industries SAS  
Country Customer Care Center  
<http://www.schneider-electric.com/contact>  
35, rue Joseph Monier  
CS 30323  
F- 92506 Rueil Malmaison Cedex  
RCS Nanterre 954 503 439  
Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

Published by Schneider Electric

ENVPEP2012006\_V1

© 2019 - Schneider Electric – All rights reserved

12/2020