

DATASHEET - 2GS00/I43E-V2K




Fuse enclosure, 2x enclosure base 3p NH00 100A,
HxWxD=250x375x150mm



Part no. 2GS00/I43E-V2K
Catalog No. 046379


EL-Nummer 2502213
(Norway)

Delivery program

Dimensions		mm	
Product range			Ci insulated enclosures
Basic function			Enclosures with devices fitted
Product function			Two-way fuse box
Single unit/Complete unit			Stand-alone device
Function			with parallel link between the incoming sides
Description			Incoming cable max. 35 mm ² Max. fuse 63 A
Width		mm	375
Height		mm	250
Depth		mm	150
Rated operational current	I _e	A	2 x 100
Rated operational voltage	U _e	V AC	690
Fuse cartridge		Size	NH00

Notes

C




2 x M50/20

6 x M25/16

8 x M20

D



1 x M50/32

6 x M25/16

Notes Fuse links

→#288934

→#288909

→#100651

Technical data ETIM 7.0


Energy distribution systems (EG000015) / Switch fuse enclosure (EC002277)

Electric engineering, automation, process control engineering / Electrical insulation and connecting material / Energy distribution system / Switch fuse enclosure (ecl@ss10.0.1-27-40-06-24 [ADI674007])

Number of poles		3
Concurrently switching N-neutral		No
Rated current	A	100
Rated voltage	V	690
Number of groups		2
Protection		Knife blade fuse (NH)
Material housing		Plastic
Degree of protection (IP)		IP65
Height	mm	250
Width	mm	375

Depth		mm	150
Extension possible			Yes
Positioning on rail system			Universal
With transparent cover			Yes

Dimensions

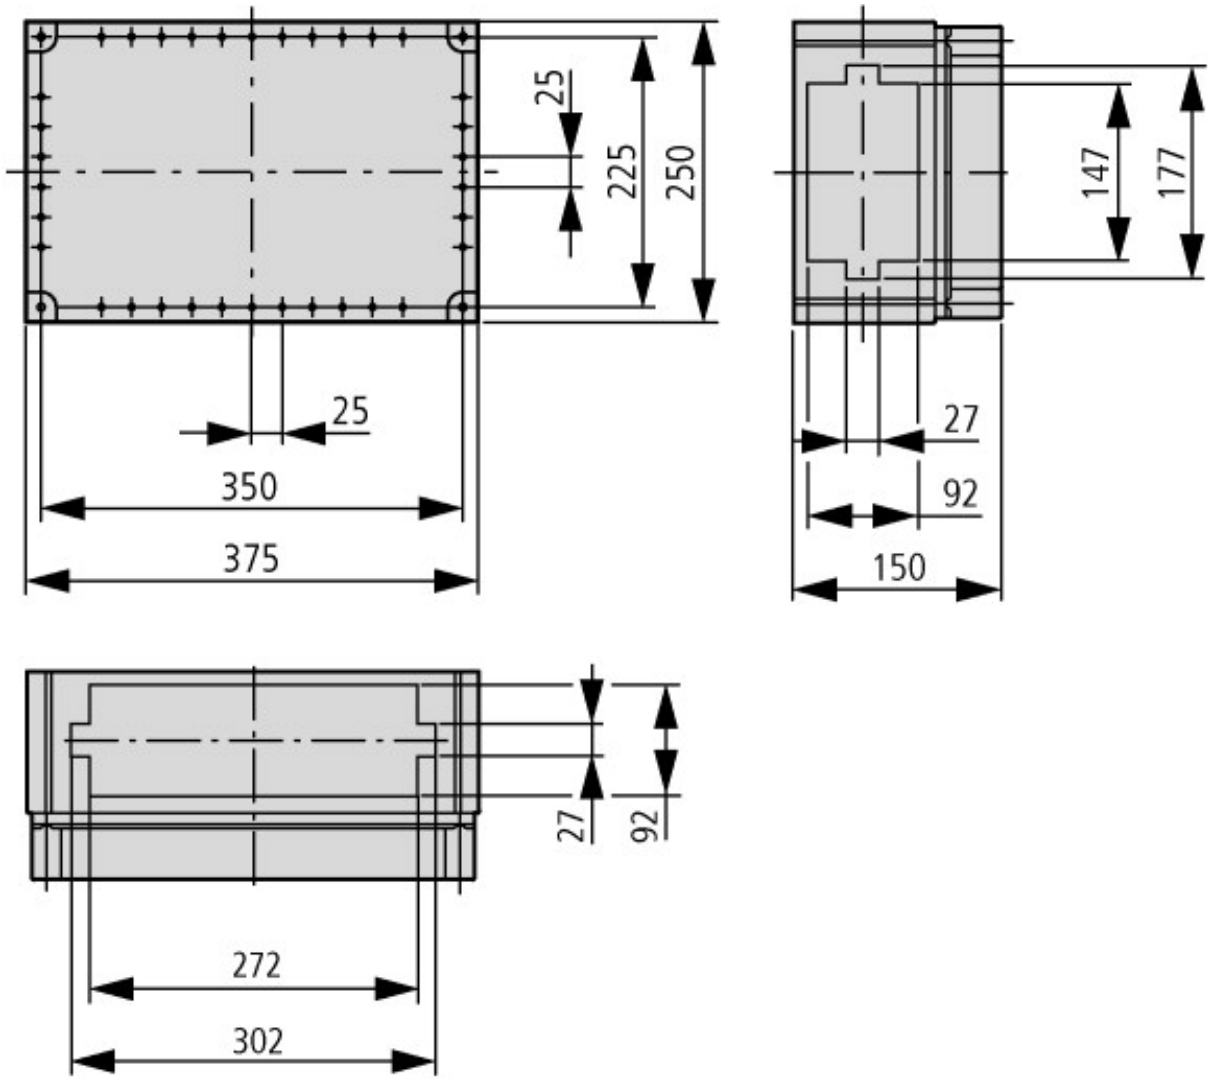

Additional product information (links)

http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&allowInterrupt=1&RevisionSelectionMethod=LatestReleased&noSaveAs=0&Render=1	model certification xEnergy Safety Ci
http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&allowInterrupt=1&RevisionSelectionMethod=LatestReleased&noSaveAs=0&Render=1	Save time – we assist you with expert pre-assembly
http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&allowInterrupt=1&RevisionSelectionMethod=LatestReleased&noSaveAs=0&Render=1	product information xEnergy Safety Ci