

In-wall Switch 16A

Zigbee connected built-in switch. Control lights, heating and other appliances by app.



Remote control your traditional appliances and electronics that are part of your fixed installation smart. With the 16A in-wall switch, you can still cut the power on your local switch like a traditional switch, as well as remotely via App by connecting the device to one of our smart home hubs or smart routers.

Production data

- EI-number (NO): 1403715
- Product category: Indoor Climate and Lighting
- SKU/Art.no: HT-IW16A-1
- GTIN (EAN): 7090026462459

Power

- Primary power source: Part of Fixed Installation
- Voltage (V): 100-240V AC
- Power Max. (W @230V): 3600
- Max Load (A ~ V): 16A ~230V

Communication network

- No subscription required

Type of Keypad

- Physical Buttons

Technical Specifications

- Maximum Cross Section (mm²): 2.5
- Type of Switch: Actuator
- Actuator type: Switch

Communication smart home

- Requires smart home hub
- RF communication protocol: Zigbee 3.0
- Range extender (MESH): Zigbee
- Max wireless range (meter): 30 (open range)
- OTA update support
- Voice control support(When connected to a Heimgard Hub. Voice assistant is not included): Google Assistant
- App control (When connected to a Heimgard Hub)
- Name of available app(s): Heimgard app

Function keys

- Qty: 1
- Type: Reset

Materials and colors

- Finish: Plastic, glass front panel
- Color: White

Certificates

- CE, FCC, ROHS

Key features

- ▶ 16A ~230V
- ▶ 1-pole (Single phase break)
- ▶ Remote control your connected devices
- ▶ Zigbee range extender
- ▶ Authorized installer required

Order no.: 126606

In-wall Switch 16A

Zigbee connected built-in switch

Placement and operation temperature

- Field of application: Indoors
- IP classification: IP20
- Operating temperature (°C): -10 – +50
- Operating relative humidity (%): 40~90%RH (No condensation)
- Mounting options: Optional DIN clip
- Placement: Integrated
- Authorized installer required
- Type of junction box: Single
- Terminal connection type: Screw

Memory

- Storage options: Cloud storage (Subscription required)

Safety

- Phase break (Single/Dual): 1-pole
- Protection class II
- Halogen-free

Logistics and packaging


- Customs Tariff Number (HS-Code): 8536.50.0000
- Country of origin: China
- Dimensions F-PAK HxWxD (cm): 7.3x11.5x3.5
- Dimensions D-PAK HxWxD (cm): 36.5x35x35
- Gross weight F-PAK (g): 115
- Gross weight D-PAK(kg): 13,5
- Quantity in F-PAK (sales pack): 1
- Number of F-PAK in D-PAK (carton): 100
- Minimum order quantity: D-PAK
- Order multiple: D-PAK
- Storage temperature (°C): 10-35°C
- Storage humidity (%): 30-50%RH (No condensation)

Package Content

- Main product
- Quick start guide

Design, dimensions and weight

- Dimensions HxWxD (mm): 4.55x4.5x2.03
- Net weight (g) F-PAK: 120
- Net weight per unit (g): 41

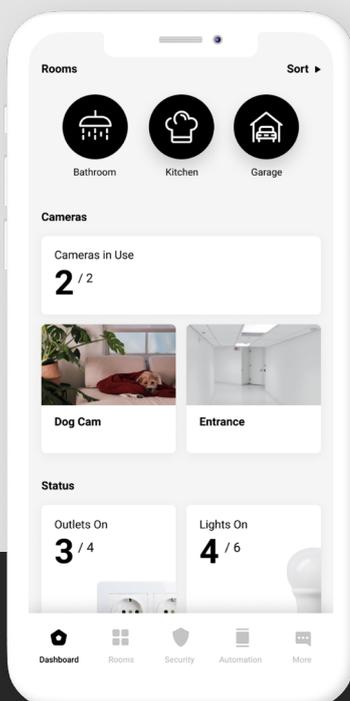

You can control more than 2 000 products from leading brands like Ikea, Samsung, Google and many, many more with the Heimgard Smart Home app. Available in Apple Store and Play Store.