6200 SERIES

VX2300

6286

6200 Series 3.5" videophone with handset for the "true" 2 wire BUS VX2300 digital system

6286/MV

6286

3.5" TFT LCD videophone
6200 series videophone with high resolution 3.5" screen and handset.

4 push buttons
Four push buttons for: camera recall, lock release & intercommunication call, privacy ON/OFF & bus relay activation and spare service button.

Indication LEDs
3 LEDs: one to indicate when the privacy function is activated, one for when the video monitor is ON and one for when the door is open.

Call tone switch
3 level call tone volume switch (low, medium and high).

Adjustments
Contrast adjustment POT, colour intensity adjustment POT, brightness controls and BUS termination switch.

The 6286 colour videophone is a surface mount videophone incorporating a 3.5" hi-res full colour active matrix LCD screen in a satin white finish.

Can be mounted onto a table top using a desktop kit

3.5" TFT LCD   DESK KIT   MEMORY VIDEO OPT.

VIDEX®
THE POWER TO SECURE

6200 Series 3.5" videophone with handset for the "true" 2 wire BUS VX2300 digital system

- 6200 series videophone with 3.5" LCD screen for use with ESVKX series, ESVKC series, ESVRK series 2 wire BUS videokits and the VX2300 digital system.
- Programmable number of rings, melody selection and privacy duration time.
- 3 LEDs for privacy ON/OFF, videophone ON and door open.
- 4 push buttons: camera recall, door open & intercommunication call, privacy ON/OFF & BUS relay activation and spare service button.
- Call tone volume adjustment (3 levels), picture contrast, colour intensity and brightness controls. BUS termination switch.
- Wall mounted (or via desktop kit), satin white finish.
- Memory videophone option available capable of storing up to 100 pictures with corresponding recorded date & time.
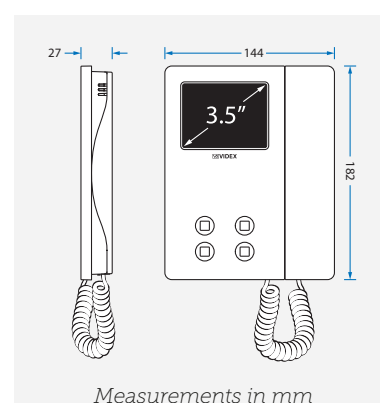

Accessories include a desk kit for an easy and practical functional alternative to a wall mount solution.

Technical characteristics

Display	3.5" Hi-Res colour LCD TFT screen
Handset/Handsfree	Handset
Number of buttons and function	4, Camera recall, door-open & Intercommunicating call, privacy ON/OFF & BUS relay activation button and spare service button
Privacy	Yes, timed or manual control
LEDs	3: Privacy ON/OFF, videophone ON and door open
Memory board option	Yes, up to 100 picutres with recorded date & time (**6286/MV**)
Adjustments	3 level call tone volume switch (low, medium and high). Contrast and colour intensity adjustment POTs and brightness controls. BUS termination switch
Programmable features	No. of rings (9 max.), melody type (9 max.), privacy duration time (15 mins up to 20 hours max. or manual control). Videophone address (ID)
Inputs	Local bell and door open LED
Power supply input	32-35Vdc (supplied by 2 wire BUS)
Power consumption	Standby 0.3mA, during operation 150mA, peak 200mA (max.)
Working temperature	-20°/+60°C
Mounting	Surface (wall) or via desktop kit
Finishes	Satin white
Desktop kit	62931

Accessories

**62931 Desktop kit
(inc. 895 wall socket)**

Measurements in mm