

Plug-in Relay, 11 pin, 3 CO, 24VDC, 10A with LED




Technical Data

Net weight (kg)	0,09
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	55
Contact current (A)	10
Rated current [Resistive load] (A)	10
Rated voltage [Resistive load]	250VAC / 30VDC
Switching capacity [Resistive]	2500VA / 300W
Contact material	Ag alloy
Initial contact resistance (Ohm)	≤50mΩ
Electrical endurance (Operation cycle)	≥ 10 ⁵ operations (1800 operations/h)
Mechanical durability	≥ 10 ⁷ operations (18000 operations/h)
Pick-up voltage DC (V)	≤ 80% (Bemessungsspannung)
Drop-out voltage DC (V)	≥ 10% (Rated voltage)
Maximum voltage (V)	110% (Rated voltage)
Insulation resistance	≥ 100mΩ (500VDC)
Operate time [at nominal voltage] (ms)	≤ 30ms
Release time [at nominal voltage] (ms)	≤ 20ms
Initial breakdown voltage	


Technical Data - continued

Between open contacts	1000VAC/1 min
Between poles	2500VAC/1 min
Between contact and coil	2500VAC/1 min
Humidity (%)	35% - 85% RH
Air pressure	86 - 106kPa
shock resistance	10G
Vibration resistance	10 - 55Hz
Coil information	
Rated voltage	24V-DC
Coil resistance	430Ω


Circuit diagram: Plug-in Relay, 11 pin, 3 CO, 24VDC, 10A with LED




Dimensioned drawing: Plug-in Relay, 11 pin, 3 CO, 24VDC, 10A with LED

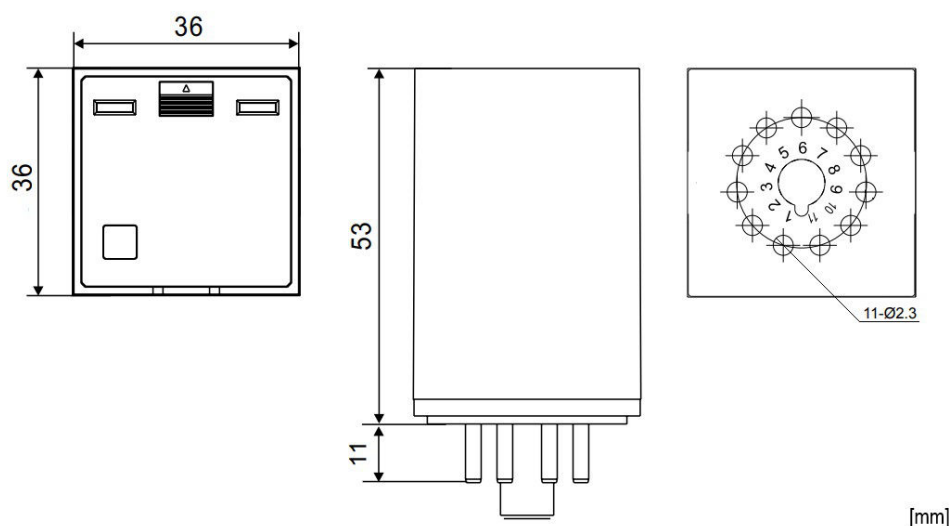

Electrical Durability Contacts 1) resistive load 2) inductive load

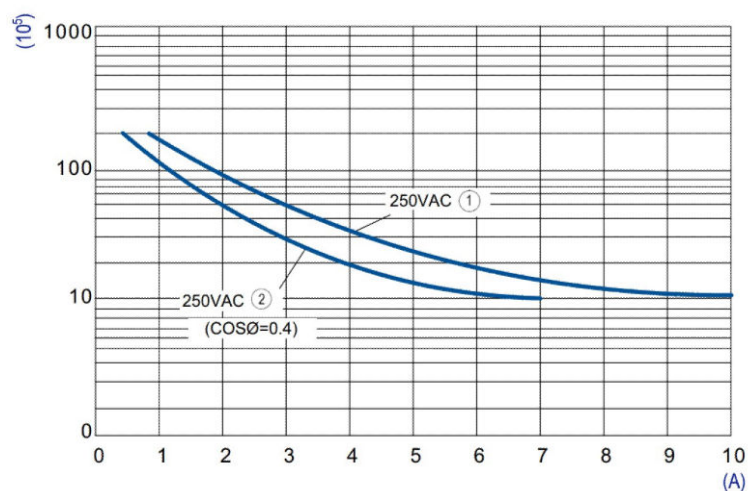

Maximum Switching Capacity 1) resistive load

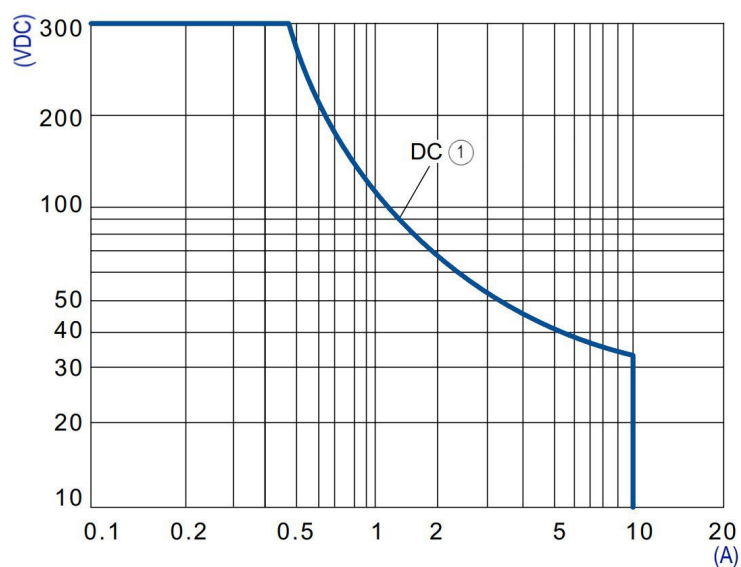

Article Table

DESCRIPTION	Order No.
Plug-in Relay, 11 pin, 3 CO, 24VDC, 10A with LED	MU323024
Optional Accessories	
Socket, screw connection, 11 pole, 12A for 3 pole MU relays	YMU78740