

Technical data sheet

FireBox with plug-in seals, double terminals

Item no. 7205750



Junction box with ceramic double terminals and soft plug-in seals. Sufficiently large wiring compartment through diagonally-arranged connection unit with completely pre-mounted, high temperature-resistant ceramic terminals. Green and yellow labelled protective conductor terminal. Fastening on easily accessible external flaps. Approved for cable systems that maintain the electrical function according to DIN 4102 Part 12 with the classes E30, E60 and E90.

Including 2 x MMSplus P 6x35 screw ties.


E30E90IP66E60

PPPolypropylene

Master data

Item no.	7205750
Type	T250ED 16-2A
Description 1	Junction box
Description 2	for function maintenance
Dimension	240x190x95
Colour	Pastel orange
RAL number	2003
Material	Polypropylene
Material symbol	PP
Smallest sales unit (VG)	1,00 Piece
Weight	105,68 kg/100 pc.

Technical data

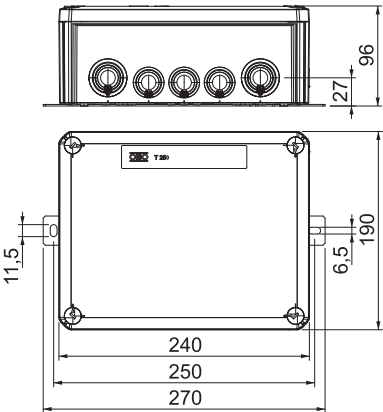

Clear internal dimensions	225x173x86 mm
Dimension L	240,00 mm
Dimension B	190,00 mm
Dimension H	95,00 mm
Dimension L1	250,00 mm
Dimension L2	270,00 mm
Dimension LxWxH	xx mm
Expandable	<input type="checkbox"/>
Number of terminals	5,00
Type of housing penetration	Cuttable stepped membrane
Equipment	Terminal
Cover	Not transparent
Cover fastening	Screwed
Entries	9 x M25 7 x M32
Entry from rear	<input type="checkbox"/>

Technical data sheet

FireBox with plug-in seals, double terminals

Item no. 7205750



Technical data

Explosion-tested version	<input type="checkbox"/>
Shape	Rectangular
Function maintenance (ETIM)	E 90
For Ex zone	Without
For Ex zone gas	Without
For Ex zone dust	Without
Halogen-free	<input checked="" type="checkbox"/>
With screening	<input type="checkbox"/>
with lid	Yes
With cover	<input checked="" type="checkbox"/>
Installation type	Surface-mounted
Nominal cross section	16,00 mm ²
Nominal voltage	660,00 V
Protection rating	IP66
Sealable	<input type="checkbox"/>
Impact-resistant	<input type="checkbox"/>
Transparent lid	<input type="checkbox"/>
Weatherproof	<input type="checkbox"/>