


# Technical data sheet

## FireBox, with plug-in seals, for data technology

Item no. 7205766

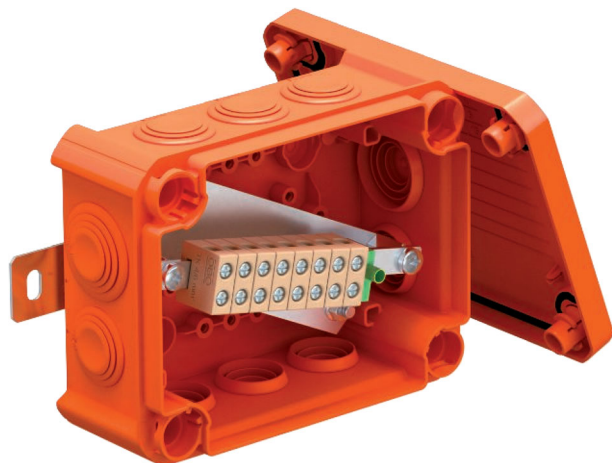

Connection box for data technology with soft plug-in seals. Pairs of high-temperature-resistant ceramic terminals, suitable for data cables. Green-yellow labelled protective conductor/shield terminal. Fastening on easily accessible external flaps. Approved for cable systems that maintain the electrical function according to DIN 4102 Part 12 with the classes E30, E60 and E90. Including 2x MMSplus P 6x35 screw ties.


E30 E90 IP 66 E60

PP Polypropylene

### Master data

Item no.	7205766
Type	T100ED 4x8AD
Description 1	Junction box
Description 2	for function maintenance
Dimension	150x116x67
Colour	Pastel orange
RAL number	2003
Material	Polypropylene
Material symbol	PP
Smallest sales unit (VG)	1,00 Piece
Weight	45,21 kg/100 pc.

### Technical data

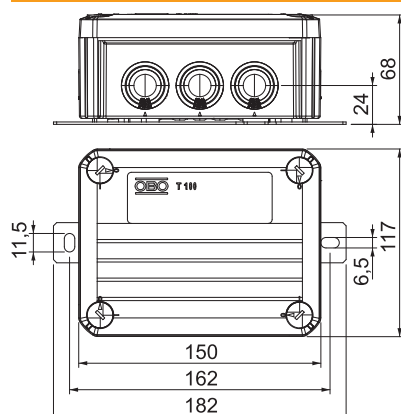

Length	150,00 mm
Width	116,00 mm
Height	68,00 mm
Clear internal dimensions	136x102x57 mm
Dimension L	150,00 mm
Dimension B	116,00 mm
Dimension H	68,00 mm
Dimension L1	162,00 mm
Dimension L2	182,00 mm
Dimension LxWxH	150x116x68 mm
Expandable	□
No. of entries	10,00
Number of terminals	9,00
Type of housing penetration	Cuttable stepped membrane
Equipment	Terminal
Cover	Not transparent

# Technical data sheet

FireBox, with plug-in seals, for data technology

Item no. 7205766



## Technical data

Cover fastening	Screwed
Entries	8 x M25 2 x M32
Entry from rear	<input type="checkbox"/>
Explosion-tested version	<input type="checkbox"/>
Shape	Rectangular
Function maintenance (ETIM)	E 90
For Ex zone	Without
For Ex zone gas	Without
For Ex zone dust	Without
Halogen-free	<input checked="" type="checkbox"/>
With screening	<input type="checkbox"/>
with lid	Yes
With cover	<input checked="" type="checkbox"/>
Installation type	Surface-mounted
Nominal cross section	0,50 - 4,00 mm <sup>2</sup>
Nominal voltage	660,00 V
Protection rating	IP66
Sealable	<input type="checkbox"/>
Impact-resistant	<input type="checkbox"/>
Transparent lid	<input type="checkbox"/>
Weatherproof	<input type="checkbox"/>