


# Data Sheet EKO50054

<b>Product:</b>	Push-button jalusi 2-pole screw
<b>E-number NO:</b>	14 708 66
<b>E-number SV:</b>	18 400 65
<b>E-number FI:</b>	21 046 54
<b>EAN:</b>	7020160500540
<b>Packing:</b>	5
<b>Color:</b>	Pure white

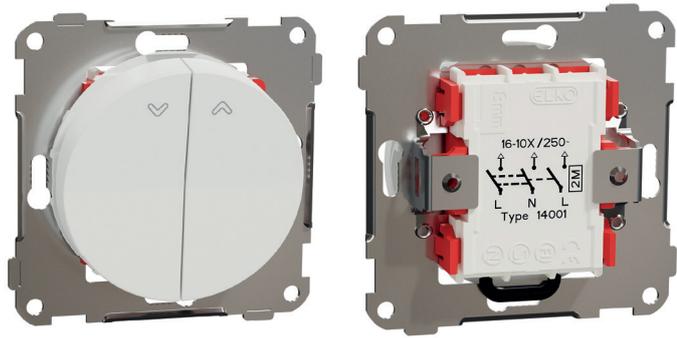


**Product description:**

ELKO One shutter control is a mechanism with rockers for venetian blind control. It is provided with screw terminals with the wire entrance on the side. Its Ue rated operational voltage is 230VAC. Its Ie rated operational current is 16A. Claw-kit EKO04848 can be used for additional fixation to the flush wall-box when needed. To be mounted in suitable 1 to 5-gang cover frame for flush cc 60mm wall-box installation or 1 to 3-gang low or high surface mounted box for surface installation, as well as in corner box. The dimensions of the product are (W) 71mm x (H) 71mm x (D) 30mm. It is made of recycled Polycarbonate (PC). The color of the product is pure white (RAL 9003) with matt surface finish. It reaches IP21 degrees of protection.




One range by ELKO is covering Wiring Devices, Stand Alone Electronics and Network Connectivity functions for both flush as well as surface installation. The One range has been developed with sustainability in mind, using recycled plastic, recycled packaging material and Cradle to Cradle certified. Modern and slim design with a smooth matt surface finish that is reflecting the light in a glowing way due to it's shape.

**Dimensions**

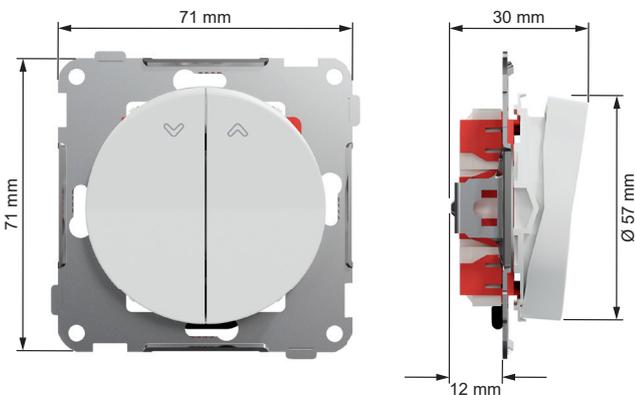

**Wiring diagram: 2 pole shutters**

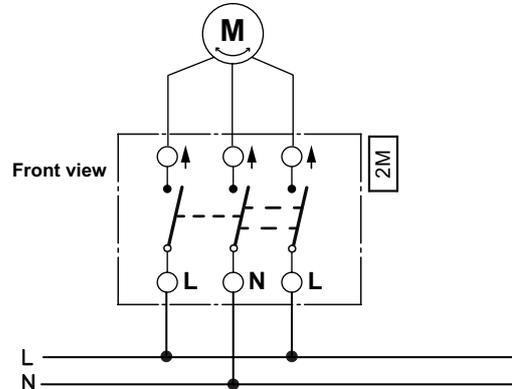

**⚠ ⚠ DANGER**

**HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH**  
 The product must be installed and connected by a qualified electrician.  
 A qualified electrician must demonstrate an in-depth knowledge of:

- Construction of electrical installations in buildings in accordance with IEC 60364
- Additional safety standards, local connection rules, and building regulations
- Standardized tools and measuring equipment

**Failure to follow these instructions will result in death or serious injury.**