

Lineal surface



Lineal surface 1120 Hvit 1870lm 3000K Ra>80 Connect

El-nummer: 3308307
EAN: 5703821207096
SG artikkelnr: 9341000818



Elektrisk

Systemeffekt (W): 17W
Spennings: 220-240V
Maks. armaturer per sikring: B10: 26, B16: 42, C10: 44, C16: 70

Lysteknikk

Type lyskilde: LED
Effektiv lysstrøm (lm): 1870lm
Lysutbytte: 110 lm/W
Fargetemperatur: 3000K
Fargegjengivelse (Ra/CRI): Ra>80
MacAdams faktor: SDCM: 3
Levetid: L80/B10>100.000
Levetid: L93/>50.000
Lysstråling: Direkte

Styring

Styring: Connect

Beskyttelse

Isolasjonsklasse: Klasse I
IK Klasse: IK08
IP Klasse: IP20

Energi og godkjenning

Breeam: Oppfyller Hea 01 krav til flimmerfri belysning (In-Use: Hea 05)

Materialer og overflater

Materiale: Aluminium
Farge: Hvit RAL 9003

Montering/Tilkobling




Montering: Utenpåliggende, Innendørs
Modul: 1120

Dimensjoner

Lengde (mm) L: 1192
Bredde (mm) W: 42
Høyde (mm) H: 70
Vekt (kg) brutto/netto: 2.8 / 2.3

Forpakning

Forpakkingsstørrelse (mm): 1350 x 47 x 85

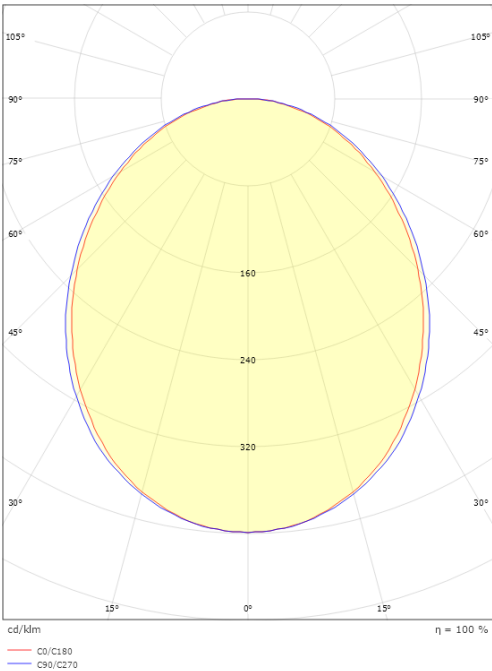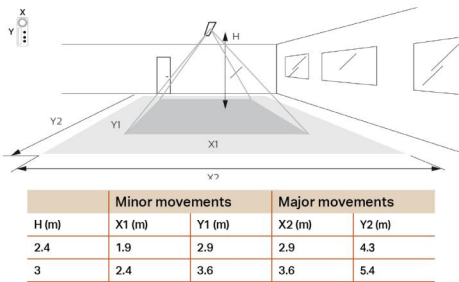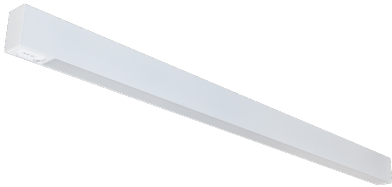

5 7 0 3 8 2 1 2 0 7 0 9 6