


ACTOR G2 TRACK

Actor G2 Track combines linear lighting with full flexibility on a 3-phase track. Install individually or position units end-to-end to create long light lines. Compatible with standard 3-phase tracks and can easily be combined with spotlights for added variation. The built-in DIP switch allows you to set the colour temperature on site. No advance configuration required; the light can be tuned once installed. Its modular design means only the necessary part needs replacement. Choose from various glare shields to match the environment: opal, microprismatic or double parabolic. Combine with track-mounted spotlights to achieve dynamic lighting that enhances both the space and its details.



- Complete luminaire for **3-phase track with linear light** – ideal for offices, corridors, and retail environments
- **Flexible light adjustment via DIP switch**
– choose color temperature 3000K/4000K
- **Visual comfort with selectable glare protection**
– opal, microprismatic or double parabolic
- Service-friendly design
– built for the future, **replaceable LED & driver**
- **Combine luminaires or mount them individually**
– create continuous light lines and patterns
- **Choose your preferred control method:**
Dimmable, DALI
- Color rendering: **Ra>90**
- Lifespan: L80 **100.000h**, L100 **100.000h** CLO
LED and driver

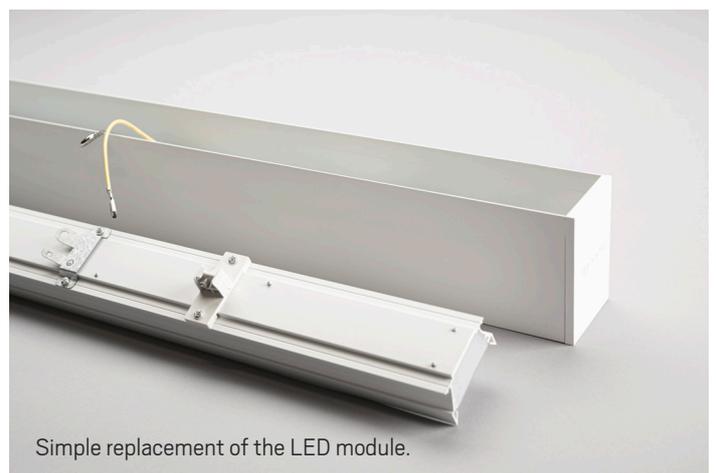


Simple replacement of the LED module.



ACTOR G2 TRACK

GTIN	Type	Color Temperature	Luminaire lumen	Luminaire efficiency	Effect luminaire
7392971155234	DP White DIM	3000K/4000K	2060-2600lm	108lm/W	24W
7392971155241	DP White DALI CLO	3000K/4000K	2300-2460lm	112lm/W	22-26W
7392971155258	DP Black DIM	3000K/4000K	1840-2430lm	101lm/W	24W
7392971155265	DP Black DALI CLO	3000K/4000K	2230-2300lm	105lm/W	22-26W
7392971155272	MP White DIM	3000K/4000K	2570-3130lm	131lm/W	24W
7392971155289	MP White DALI CLO	3000K/4000K	2820-3020lm	137lm/W	22-26W
7392971155296	MP Black DIM	3000K/4000K	2160-2530lm	105lm/W	24W
7392971155302	MP Black DALI CLO	3000K/4000K	2350-2480lm	113lm/W	22-26W
7392971155319	OP White DIM	3000K/4000K	2720-3250lm	135lm/W	24W
7392971155326	OP White DALI CLO	3000K/4000K	2930-3090lm	140lm/W	22-26W
7392971155333	OP Black DIM	3000K/4000K	2290-2750lm	115lm/W	24W
7392971155340	OP Black DALI CLO	3000K/4000K	2570-2660lm	121lm/W	22-26W



Visualization of Actor G2 Track

