

TIME RELAY, MULTI-FUNCTION, 1 CO CONT., 13 FUNCTIONS, 15 TIME SET. RANGES, (1, 3, 10, 30, 100), (S/MIN/HR) 24V AC/DC AT 50/60HZ, LED, SPRING-LOADED TERM. (PUSH-IN)



Figure similar

General technical data:		
product brand name		SIRIUS
Product designation		timing relay
Mounting position		any
Product function at the relay outputs Switchover delayed/without delay		No
Product function non-volatile		No
Product component		
• Relay output		Yes
• semi-conductor output		No
Installation altitude at height above sea level maximum	m	2 000
Ambient temperature		
• during operation	°C	-25 ... +60
• during storage	°C	-40 ... +85
• during transport	°C	-40 ... +85
Relative humidity during operation	%	10 ... 95
EMC emitted interference acc. to IEC 61812-1		EN 61000-6-4(3)
EMI immunity acc. to IEC 61812-1		EN 61000-6-2

Conducted interference due to burst acc. to IEC 61000-4-4		2 kV network connection / 1 kV control connection
Conducted interference due to conductor-earth surge acc. to IEC 61000-4-5		2 kV
Conducted interference due to conductor-conductor surge acc. to IEC 61000-4-5		1 kV
Electrostatic discharge acc. to IEC 61000-4-2		4 kV contact discharge / 8 kV air discharge
Field-bound parasitic coupling acc. to IEC 61000-4-3		10 V/m
Surge voltage resistance rated value	V	4 000
Power loss [W] total typical	W	2
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		K
Equipment marking acc. to DIN EN 81346-2		K
Category acc. to EN 954-1		none
Protection against electrical shock		finger-safe
Protection class IP		IP20
Mechanical service life (switching cycles) typical		10 000 000
Electrical endurance (switching cycles) at AC-15 at 230 V typical		100 000
Operating frequency with 3RT2 contactor maximum	1/h	5 000
Vibration resistance acc. to IEC 60068-2-6		10 ... 55 Hz / 0.35 mm
Shock resistance acc. to IEC 60068-2-27		11g / 15 ms
Relative repeat accuracy	%	1
Recovery time	ms	150
Minimum ON period	ms	35
Degree of pollution		3
Insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value	V	300
Relative setting accuracy relating to full-scale value	%	5

Switching Function:

Switching function

- ON-delay
- ON-delay/instantaneous contact
- passing make contact
- passing make contact/instantaneous contact
- OFF delay
- flashing asymmetrically starting with interval
- flashing asymmetrically starting with pulse
- flashing symmetrically starting with pulse
- flashing symmetrically starting with pulse/instantaneous
- flashing symmetrically starting with interval

Yes
No
Yes
No
Yes
No
No
Yes
No
Yes

• flashing symmetrically starting with interval/instantaneous • star-delta circuit • star-delta circuit with delay time		No Yes No
Switching function with control signal • additive ON delay • passing break contact • OFF delay • pulse-shaping • OFF delay/instantaneous • ON-delay/OFF-delay/instantaneous • passing break contact/instantaneous • additive ON delay/instantaneous • ON-delay/OFF-delay • passing make contact • passing make contact/instantaneous contact • pulse delayed • pulse delayed/instantaneous • pulse-shaping/instantaneous		Yes Yes Yes Yes No No No No Yes Yes No Yes No No
Switching function of interval relay with control signal • retrotriggerable with deactivated control signal/instantaneous contact • retrotriggerable with activated control signal • retrotriggerable with activated control signal/instantaneous contact • retriggerable with deactivated control signal		No Yes No Yes
Design of the control terminal non-floating		Yes

Control circuit/ Control:

Adjustable time	s	0.05 ... 360 000
Type of voltage of the control supply voltage		AC/DC
Control supply voltage frequency 1	Hz	50 ... 60
Operating range factor control supply voltage rated value • at AC — at 50 Hz — at 60 Hz • at DC		0.85 ... 1.1 0.85 ... 1.1 0.85 ... 1.1

Auxiliary circuit:

Contact reliability of auxiliary contacts		one incorrect switching operation of 100 million switching operations (17 V, 5 mA)
Material of switching contacts		AgSnO2
Operating current of auxiliary contacts		

• at AC-15 — at 24 V — at 250 V • at DC-13 — at 24 V — at 125 V — at 250 V	A	3
	A	3
	A	1
	A	0.2
	A	0.1
Design of the fuse link for short-circuit protection of the auxiliary switch required		fuse gL/gG: 4 A
Thermal current	A	5
Switching capacity current with inductive load	A	0.01 ... 3
Number of NC contacts		
• delayed switching • instantaneous contact		0 0
Number of NO contacts		
• delayed switching • instantaneous contact		0 0
Number of CO contacts		
• delayed switching • instantaneous contact		1 0

Installation/ mounting/ dimensions:

Mounting type		screw and snap-on mounting onto 35 mm standard mounting rail
Width	mm	17.5
Height	mm	100
Depth	mm	90
Required spacing with side-by-side mounting		
• upwards • forwards • at the side • Backwards • downwards	mm mm mm mm mm	0 0 0 0 0
Required spacing for grounded parts		
• Backwards • at the side • upwards • forwards • downwards	mm mm mm mm mm	0 0 0 0 0
Required spacing for live parts		
• downwards • Backwards • at the side	mm mm mm	0 0 0

- forwards
- upwards

mm	0
mm	0

Connections/ Terminals:

Type of electrical connection for auxiliary and control current circuit		PUSH-IN connection (spring-loaded connection)
Type of connectable conductor cross-sections		
• solid		0.5 ... 4 mm ²
• finely stranded — without core end processing — with core end processing		0.5 ... 4 mm ² 0.5 ... 2.5 mm ²
• at AWG conductors — solid		20 ... 12

Certificates/ approvals:

General Product Approval	Declaration of Conformity	other
 CCC	 UL	 EG-Konf.
 CSA	 EAC	Umweltbestätigung

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RP25052AB30>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RP25052AB30>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RP25052AB30&lang=en

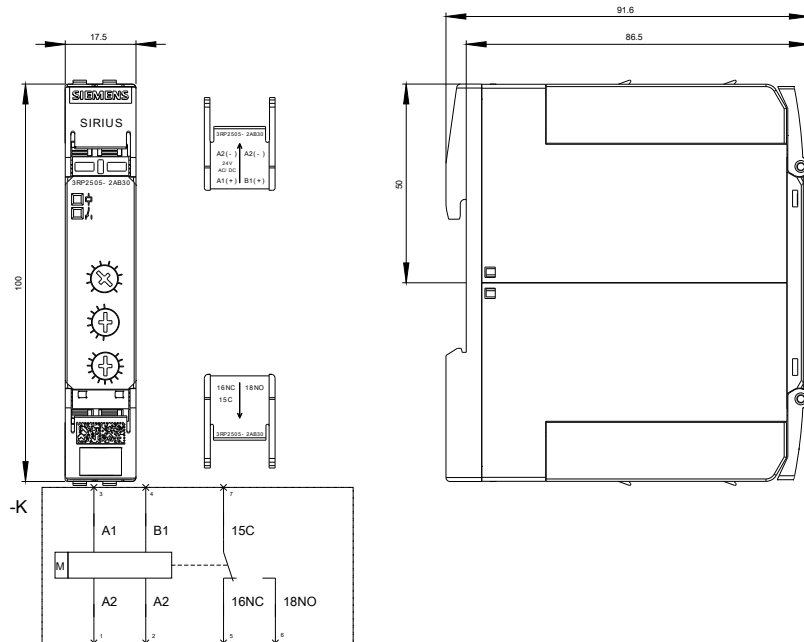

last modified:

08.02.2016