

WIRE CONNECTOR 2 CABLES WITH CONTROL WIRE TAP 4
PCS. ACCESSORY FOR: 3VA2 400/630



Model	
product brandname	SETRON
Product designation	accessories
Design of the product	circular conductor terminal
Connections according IEC	
Connectable conductor cross-section	
• for copper cable / finely stranded / minimum	70 mm²
• for copper cable / finely stranded / maximum	240 mm²
• for copper cable / finely stranded / with core end processing / minimum	70 mm²
• for copper cable / finely stranded / with core end processing / maximum	185 mm²
• for copper cable / stranded / minimum	70 mm²
• for copper cable / stranded / maximum	300 mm²
• for aluminum cable / stranded / minimum	70 mm²
• for aluminum cable / stranded / maximum	300 mm²
Wire stripping length	31 / 58,5 mm
Tightening torque	

- at usage of copper-cables / multi-stranded
- at usage of copper-cables / finely stranded

42 Nm

42 Nm

Connections according UL

Wire stripping length	1.2 / 2.3 in
Connectable conductor cross-section	
• for copper-cable / multi-stranded / minimum	2/0 AWG
• for copper-cable / multi-stranded / maximum	600 kcmil
• for copper-cable / finely stranded / minimum	2/0 AWG
• for copper-cable / finely stranded / maximum	600 kcmil
• for copper-cable / finely stranded / with insulated conductor end processing / minimum	70
• for copper-cable / finely stranded / with insulated conductor end processing / maximum	185
• for aluminum-cable / multi-stranded / minimum	2/0 AWG
• for aluminum-cable / multi-stranded / maximum	600 kcmil
Tightening torque / at usage of copper-cables	
• multi-stranded	370 lb-in
• finely stranded	370 lb-in

Certificates

General Product Approval	EMC	Declaration of Conformity	Test Certificates	other
--------------------------	-----	---------------------------	-------------------	-------





EG-Konf.

[Typprüfbescheinigung/Werkszeugnis](#)
[Sonstige](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>
Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9404-0JC23>
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3VA9404-0JC23>
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9404-0JC23
CAX-Online-Generator
<http://www.siemens.com/cax>
Tender specifications
<http://www.siemens.com/specifications>

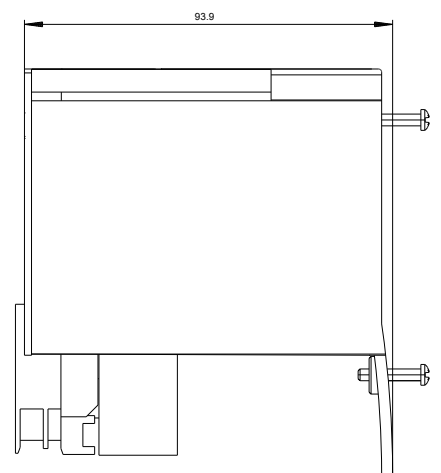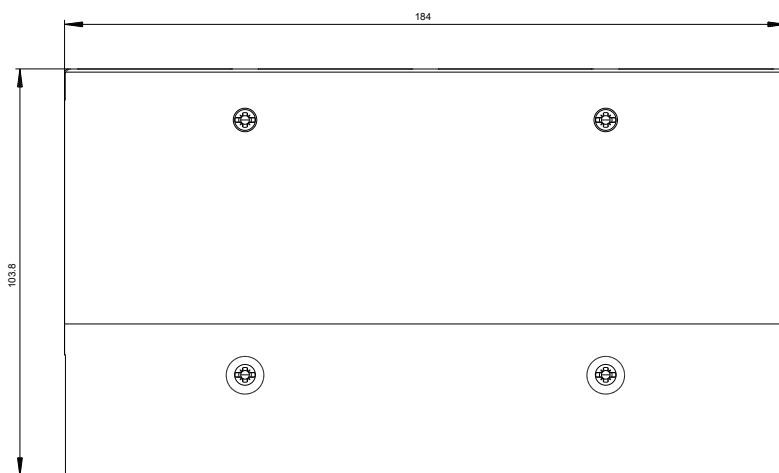

last modified:

06/05/2017