



CIRCUIT BREAKER 3VA2 IEC FRAME 160 BREAKING CAPACITY CLASS M ICU=55KA @ 415 V 3POLE, LINE PROTECTION ETU350, LSI, IN=160A OVERLOAD PROTECTION IR=64A ...160A SHORT CIRCUIT PROTECTION ISD=1,5... 10 X IR, II=10 X IN BUSBAR CONNECTION

Similar to image

General technical data:		
product brand name		SENTRON
Product designation		Molded Case Circuit Breakers
Acceptability for application		system protection
Design of the product		Line Protection
Product function	• communication function	No
	• other measurement function	No
Product component / display		No
Design of the overcurrent release		ETU350
Protective function of the overcurrent release		LSI
Product property / for zero conductors / up/downgradable / short-circuit and overload protection		No
Continuous current / rated value	A	160
Operating voltage		
	• at 50/60 Hz / for AC / rated value	V 690
Insulation voltage / rated value	V	800
Number of poles		3
Active power loss / maximum	W	25.5

Switching capacity class of the circuit breaker		M
Protection class IP / on the front		IP40

Motor rating data:

Product function / phase disturbance recognition		No
---	--	----

Schaltvermögen:

Breaking capacity limit short-circuit current (I_{cu})		
• at 240 V / rated value	kA	85
• at 415 V / rated value	kA	55
• at 690 V / rated value	kA	2.5
Breaking capacity operating short-circuit current (I_{cs})		
• at 240 V / rated value	kA	85
• at 415 V / rated value	kA	55
• at 690 V / rated value	kA	2.5
Ultimate short-circuit current making capacity (I_{cm})		
• at 240 V / rated value	kA	187
• at 415 V / rated value	kA	121
• at 690 V / rated value	kA	3.75

Overcurrent Release:

Adjustable response current		
• of the current-dependent overload release	A	0.394 ... 1
• of the non-delayed short-circuit release / initial value	A	10
Adjustable response current		
• of the short-time delayed short-circuit release	A	1.5 ... 10
Settable delay / of the S-trip		
• with I ² t characteristic	s	0.02 ... 0.4
Settable current response value / of I-trip / end value	A	10

Connections:

Design of the electrical connection		
• for main current circuit		Lug Terminal

Control circuit:

Number of changeover contacts		
• for auxiliary contacts		0
Product component		
• undervoltage release mechanism		No
• Voltage trigger		No
• undervoltage release with leading contact		No
• trip indicator		No

Manufacturer article number

- 3 of the integrated auxiliary switch /alarm switch
- of integrated auxiliary trip

Ambient conditions:**Ambient temperature**

- during operating
- during storage

°C	-25 ... +70
°C	-40 ... +80

Dimensions and weights:

Width	mm	105
Height	mm	181
Depth	mm	107
Net weight	g	2,285

Lebensdauer:

Mechanical operating cycles as operating time / typical	20,000
Reference code / according to DIN EN 61346-2	Q

Certificates/approvals:**Declaration of Conformity****Further information:****Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA2116-5HN32-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/3VA2116-5HN32-0AA0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA2116-5HN32-0AA0

CAX-Online-Generator

<http://www.siemens.com/cax>

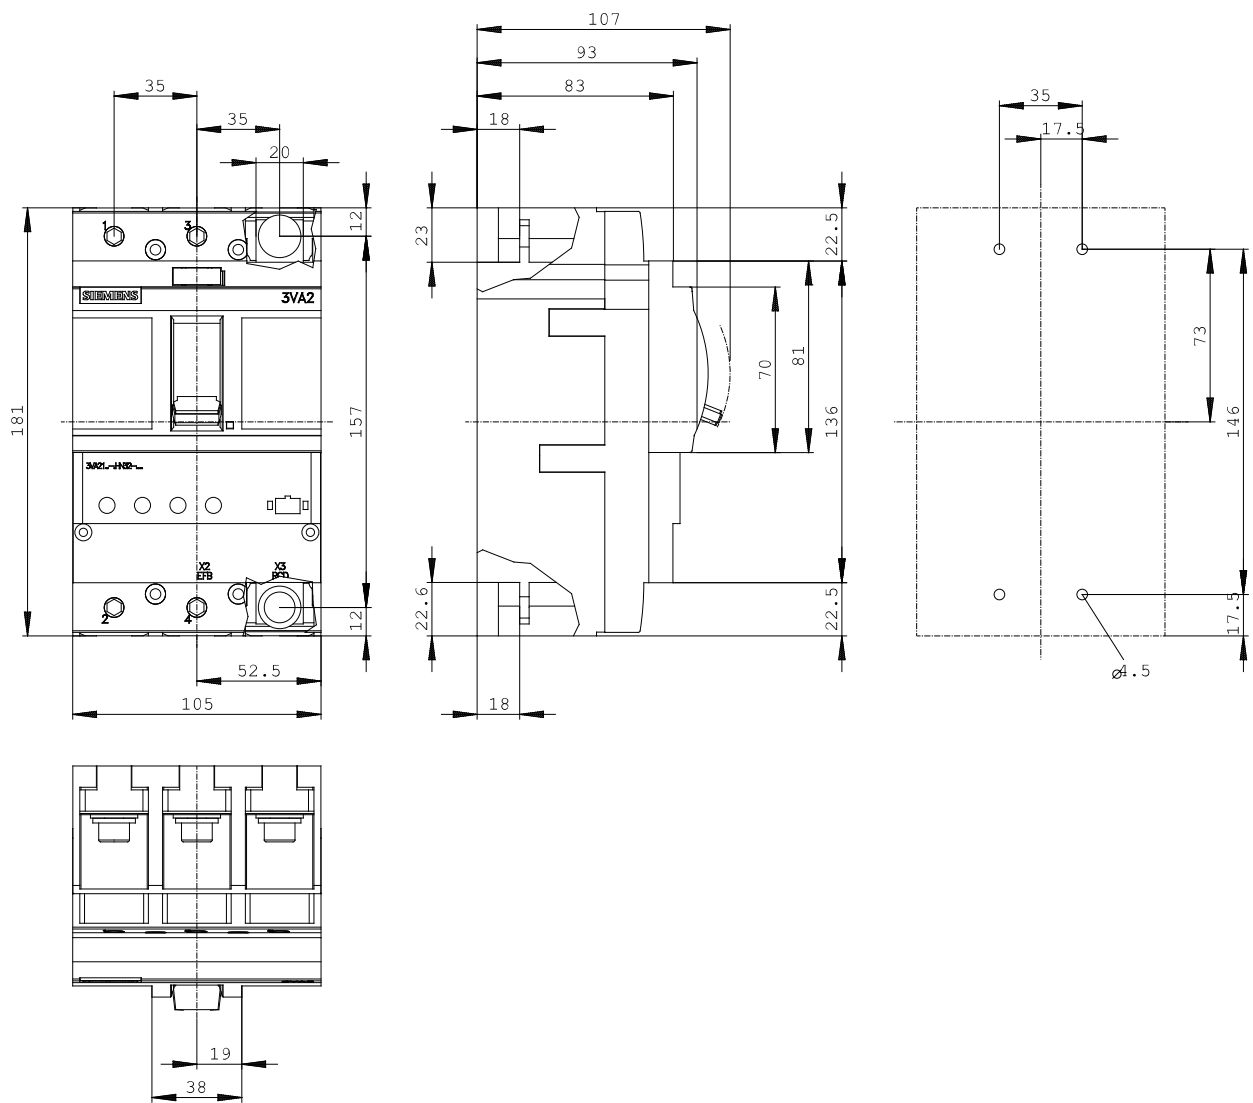

last change:

May 14, 2014