

BU for ET 200SP motor starter with infeed 24V



Figure similar

Product category	Accessories
Product designation	BaseUnit
Design of the product	For DC feed in
Product type designation	BU30-MS3

General technical data	
Insulation voltage	
• rated value	500 V
Degree of pollution	2
Surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
• between main and auxiliary circuit	500 V
Protection class IP	IP20
Shock resistance	6g / 11 ms
Vibration resistance	15 mm to 6 Hz; 2g to 500 Hz
Protection against electrical shock	finger-safe

Inputs/ Outputs	
Number of digital inputs	0

Main circuit	
Number of poles for main current circuit	3
Type of voltage of the operating voltage	AC
Operating voltage <ul style="list-style-type: none"> • rated value 	500 V
Operating current <ul style="list-style-type: none"> • at AC at 400 V rated value 	32 A; Derating, see Manual

Supply voltage	
Type of voltage of the supply voltage	DC
Supply voltage 1 at DC rated value <ul style="list-style-type: none"> • minimum permissible • maximum permissible 	24 V 20.4 V 28.8 V
Ampacity maximum	7 A






Installation/ mounting/ dimensions	
Mounting position	vertical, horizontal, flat
Mounting type	standard rail
Height	215 mm
Width	30 mm
Depth	75 mm
Required spacing <ul style="list-style-type: none"> • with side-by-side mounting <ul style="list-style-type: none"> — upwards — downwards 	50 mm 50 mm


Ambient conditions	
Installation altitude at height above sea level <ul style="list-style-type: none"> • maximum 	4 000 m; For derating see manual
Ambient temperature <ul style="list-style-type: none"> • during operation • during operation maximum • during storage • during transport 	-25 ... +60 °C For derating see manual -40 ... +70 °C -40 ... +70 °C
Environmental category during operation acc. to IEC 60721	3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices)
Relative humidity during operation	10 ... 95 %
Air pressure <ul style="list-style-type: none"> • acc. to SN 31205 	900 ... 1 060 hPa

Connections/Terminals	
Type of electrical connection <ul style="list-style-type: none"> • for main current circuit • for auxiliary and control current circuit 	PUSH-IN connection (spring-loaded connection) PUSH-IN connection (spring-loaded connection)

Type of connectable conductor cross-sections at the inputs for supply voltage	
<ul style="list-style-type: none"> • solid • finely stranded with core end processing 	<p>1x 0.5 ... 2.5 mm²</p> <p>1x 0.5 ... 2.5 mm²</p>
Type of connectable conductor cross-sections	
<ul style="list-style-type: none"> • at the inputs for supply voltage at AWG conductors solid 	1x 20 ... 12
Type of connectable conductor cross-sections for load-side outgoing feeder	
<ul style="list-style-type: none"> • solid • finely stranded without core end processing • finely stranded with core end processing 	<p>1x 0,5 ... 2,5 mm²</p> <p>1x 0,5 ... 2,5 mm²</p> <p>1x 0,5 ... 2,5 mm²</p>
Type of connectable conductor cross-sections at AWG conductors for load-side outgoing feeder	1x 20 ... 12
Shape of the screwdriver tip	Slot
Size of the screwdriver tip	Standard screwdriver 0.6 mm x 3.5 mm

Certificates/approvals

General Product Approval	Declaration of Conformity	Test Certificates	Shipping Approval
 CSA	 UL	 EAC	 EG-Konf.
		Type Test Certificates/Test Report	 ABS

Shipping Approval	other
 LRS	Confirmation Environmental Confirmations

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1908-0AP00-0BP0>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1908-0AP00-0BP0>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1908-0AP00-0BP0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1908-0AP00-0BP0&lang=en

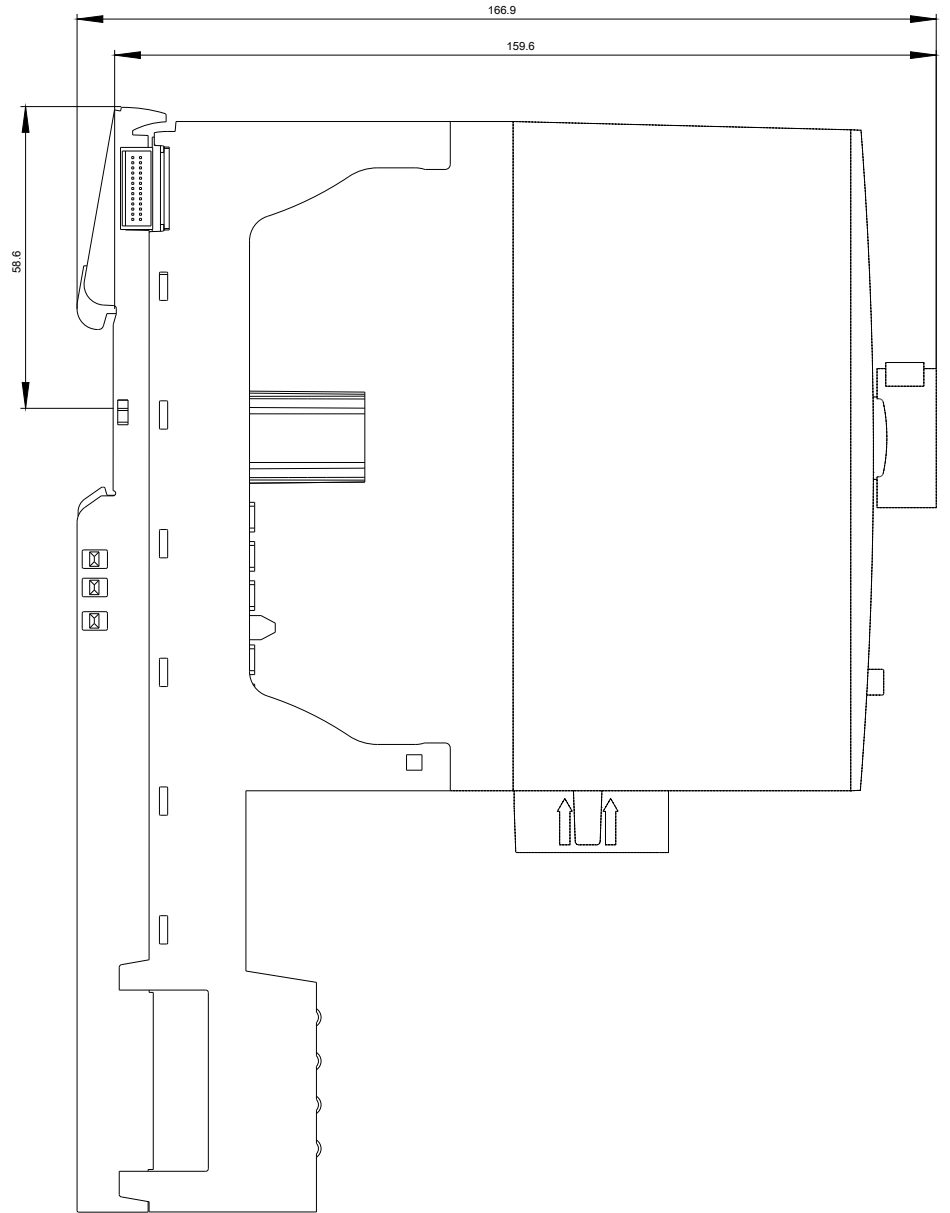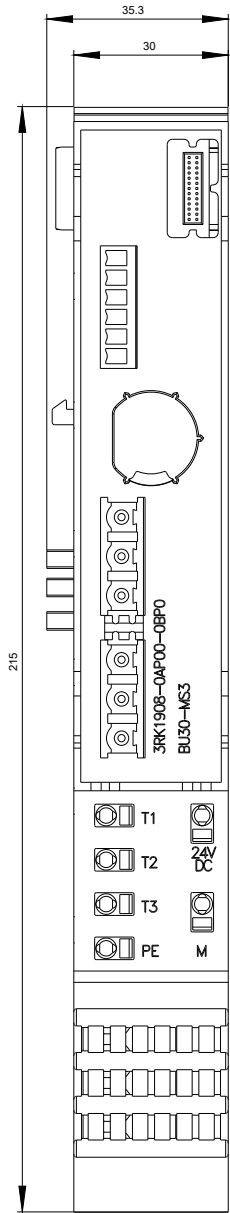

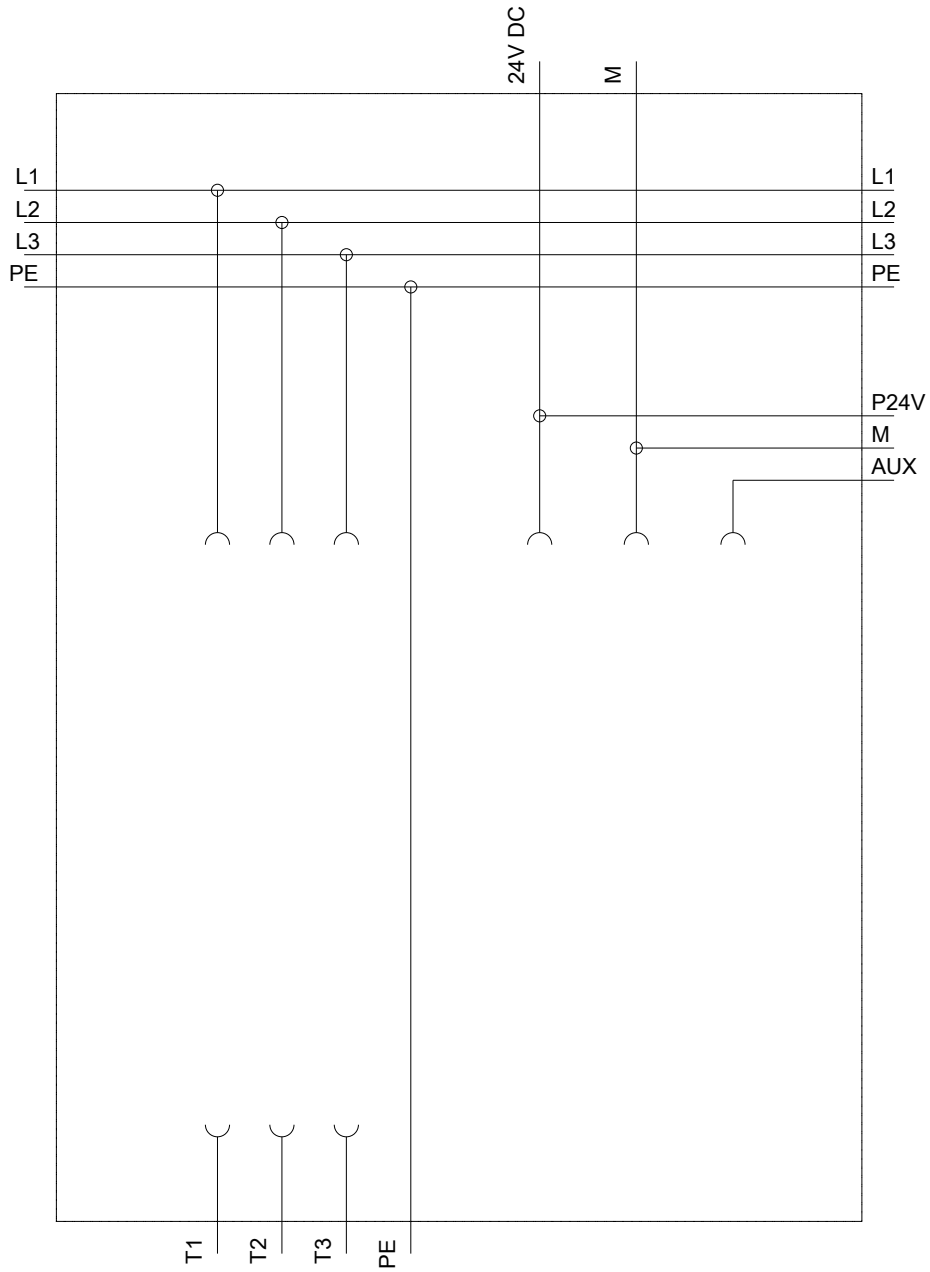

last modified:

10/06/2017