

SIRIUS, COMPACT STARTER, REVERSING STARTER . 690 V, 24 V DC, 3 ... 12 A, IP20, CONN. MAIN CIRCUIT: PLUG-IN, W/O TERMINALS, CONN. CONTROL CIRCUIT: SPRING-LOADED TERMINAL



Product brand name	SIRIUS
Product designation	compact starter
Design of the product	reversing feeder

General technical data

Product function	
• Control circuit interface to parallel wiring	No
Product extension	
• Auxiliary switch	Yes
Insulation voltage	
• rated value	690 V
Degree of pollution	3
Surge voltage resistance rated value	6 000 V
Protection class IP	IP20
Vibration resistance	f= 4 ... 5.8 Hz, d= 15 mm; f= 5.8 ... 500 Hz, a= 20 m/s²; 10 cycles
Mechanical service life (switching cycles)	
• of the main contacts typical	10 000 000
• of auxiliary contacts typical	10 000 000
• of the signaling contacts typical	10 000 000

Electrical endurance (switching cycles) of auxiliary contacts	
• at DC-13 at 6 A at 24 V typical	30 000
• at AC-15 at 6 A at 230 V typical	200 000
Type of assignment	continuous operation according to IEC 60947-6-2
Equipment marking	
• acc. to DIN EN 61346-2	Q
• acc. to DIN EN 81346-2	Q
Ambient conditions	
Ambient temperature	
• during operation	-20 ... +60 °C
• during storage	-55 ... +80 °C
• during transport	-55 ... +80 °C
Main circuit	
Number of poles for main current circuit	3
Adjustable pick-up value current of the current-dependent overload release	3 ... 12 A
Formula for making capacity limit current	12 x I _e
Formula for interruption capacity limit current	10 x I _e
Mechanical power output for 4-pole AC motor	
• at 400 V rated value	5.5 kW
• at 500 V rated value	5.5 kW
• at 690 V rated value	7.5 kW
Operating voltage	
• at AC-3 rated value maximum	690 V
Operating current	
• at AC at 400 V rated value	12 A
• at AC-43	
— at 400 V rated value	11.5 A
— at 500 V rated value	12.4 A
— at 690 V rated value	8.9 A
No-load switching frequency	3 600 1/h
Operating frequency	
• at AC-41 acc. to IEC 60947-6-2 maximum	750 1/h
• at AC-43 acc. to IEC 60947-6-2 maximum	250 1/h
Control circuit/ Control	
Type of voltage	DC
Holding power	
• at DC maximum	2.9 W
Auxiliary circuit	
Number of NC contacts	

• for auxiliary contacts	0
Number of NO contacts	
• for auxiliary contacts	0
• of instantaneous short-circuit trip unit for signaling contact	0
Number of CO contacts	
• of the current-dependent overload release for signaling contact	0
Operating current of auxiliary contacts at AC-12 maximum	10 A
Operating current of auxiliary contacts at DC-13	
• at 250 V	0.27 A

Protective and monitoring functions	
Trip class	CLASS 10 and 20 adjustable
Off-delay time	50 ms
Operational short-circuit current breaking capacity (Ics)	
• at 400 V	53 kA
• at 500 V rated value	3 kA
• at 690 V rated value	3 kA

UL/CSA ratings	
Full-load current (FLA) for three-phase AC motor	
• at 480 V rated value	12 A
• at 600 V rated value	12 A
Yielded mechanical performance [hp]	
• for three-phase AC motor	
— at 200/208 V rated value	3 hp
— at 220/230 V rated value	3 hp
— at 460/480 V rated value	7.5 hp
— at 575/600 V rated value	10 hp

Short-circuit protection	
Product function Short circuit protection	Yes
Design of the fuse link	
• for short-circuit protection of the auxiliary switch required	fuse gL/gG: 10 A

Installation/ mounting/ dimensions	
Mounting position	any
• recommended	vertical, on horizontal standard mounting rail
Mounting type	screw and snap-on mounting
Height	191 mm
Width	90 mm

Depth	165 mm
Connections/Terminals	
Product function - removable terminal for main circuit - removable terminal for auxiliary and control circuit	Yes Yes
Type of electrical connection - for main current circuit - for auxiliary and control current circuit	plug-in without terminals spring-loaded terminals
Type of connectable conductor cross-sections - for main contacts - solid - finely stranded with core end processing - finely stranded without core end processing - at AWG conductors for main contacts	2x (1.5 ... 6 mm ²), 1x 10 mm ² 2x (1.5 ... 6 mm ²) 2x (1.5 ... 6 mm ²) 2x (16 ... 10), 1x 8
Type of connectable conductor cross-sections - for auxiliary contacts - solid - finely stranded with core end processing - finely stranded without core end processing - at AWG conductors for auxiliary contacts	2x (0.25 ... 1.5 mm ²) 2x (0.25 ... 1.5 mm ²) 2x (0.25 ... 1.5 mm ²) 2x (24 ... 16)
Safety related data	
B10 value with high demand rate acc. to SN 31920	1 500 000
Proportion of dangerous failures with high demand rate acc. to SN 31920	50 %
Communication/ Protocol	
Product function Bus communication	Yes
Protocol is supported IO-Link protocol	Yes
IO-Link transfer rate	COM2 (38,4 kBaud)
Point-to-point cycle time between master and IO-Link device minimum	2.5 ms
Type of voltage supply via input/output link master	No
Amount of data - of the address area of the inputs with cyclical transfer total - of the address area of the outputs with cyclical transfer total	2 byte 2 byte

Electromagnetic compatibility

Field-bound parasitic coupling acc. to IEC 61000-4-3	80 ... 3000 MHz at 10V/m
Electrostatic discharge acc. to IEC 61000-4-2	8 kV
Conducted HF-interference emissions acc. to CISPR11	150 kHz ... 30 MHz Class A
Field-bound HF-interference emission acc. to CISPR11	30 ... 1000 MHz Class A

Supply voltage

Supply voltage required Auxiliary voltage	Yes
---	-----

Display

Display version	green/red dual LED
as status display of the input/output link device	

Certificates/approvals

General Product Approval	EMC	Functional Safety/Safety of Machinery
 CCC	 EAC	 VDE
 CSA	 UL	 C-Tick

Declaration of Conformity	Test Certificates	Marine / Shipping
 EG-Konf.	Type Test Certificates/Test Report	 BUREAU VERITAS
		 LRS
		 PRS
		 RINA

Marine / Shipping	other
 RMRS	Environmental Confirmations
	Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)



<http://www.siemens.com/industrial-controls/catalogs>


Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA6500-2DB43>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA6500-2DB43>

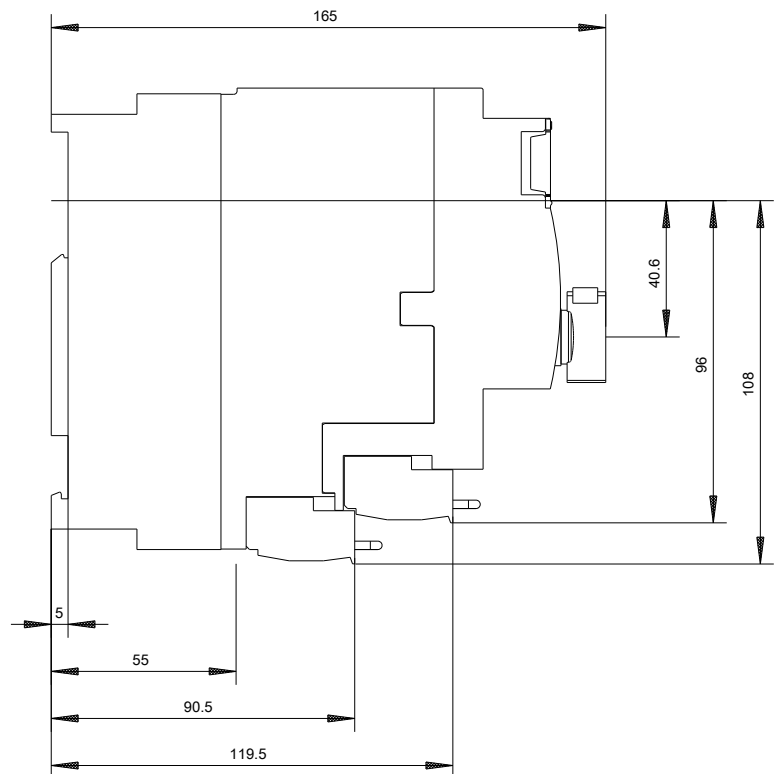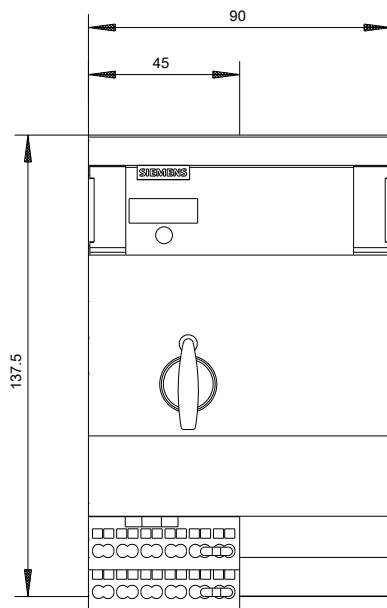

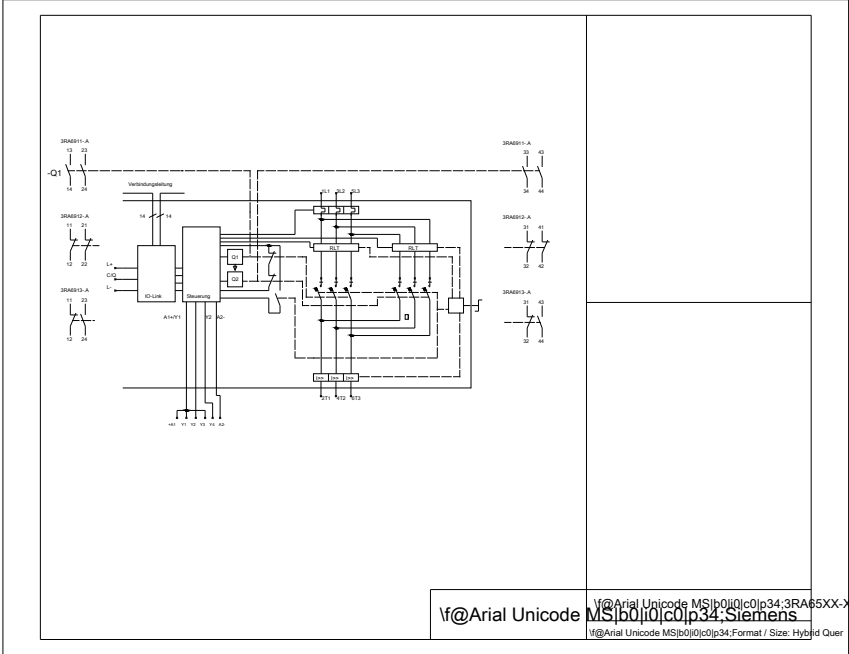

last modified:

07/14/2017