



MCB enclosure, IP65\_x, mounting rail vertical, HxWxD=375x375x225mm

**Part no.** AV/I44-200  
**Article no.** 062192

## Delivery program


Dimensions		mm	
Product range			Ci insulated enclosures
Basic function			Prepared enclosures
Product function			Enclosures for miniature circuit-breakers
Accessories			Enclosures for miniature circuit-breakers
Single unit/Complete unit			Stand-alone device
Description			Sides closed, but with full area knockout Open top and bottom For flush mounting devices with frame size 1 to DIN 43880 Transparent cover with quick-release fasteners Mounting rails for snap-fitting the devices Blanking strip for unused mounting locations Protective shroud with inscription label Sealable cover fasteners
Degree of Protection			IP65
Type cover			Transparent
Model base			Closed, with full area knockout
Width		mm	375
Height		mm	375
Depth		mm	225
1-pole MCBs		Number	45

## Design verification as per IEC/EN 61439

Technical data for design verification			
Heat dissipation, at an ambient temperature of 35°C, delta T: 20 degrees, calculated as per IEC 60890			
Individual enclosure for wall mounting	P <sub>V</sub>	CO	31
Starting enclosure for wall mounting	P <sub>V</sub>	CO	29
Middle enclosure for wall mounting	P <sub>V</sub>	CO	27
Heat dissipation, at an ambient temperature of 35°C, delta T: 35 degrees, calculated as per IEC 60890			
Individual enclosure for wall mounting	P <sub>V</sub>	CO	62
Starting enclosure for wall mounting	P <sub>V</sub>	CO	57
Middle enclosure for wall mounting	P <sub>V</sub>	CO	53
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Lower part: 960 °C / cover: 850 °C; meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Not relevant to indoor installations.
10.2.5 Lifting			20 kg per enclosure with support frame and lifting aid met; assembled and secured as per the latest applicable instruction leaflet.
10.2.6 Mechanical impact			IK10
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			IP65

10.4 Clearances and creepage distances		Is the panel builder's responsibility.
10.5 Protection against electric shock		Protection class 2, therefore not applicable.
10.6 Incorporation of switching devices and components		Is the panel builder's responsibility.
10.7 Internal electrical circuits and connections		Is the panel builder's responsibility.
10.8 Connections for external conductors		Is the panel builder's responsibility.
10.9 Insulation properties		
10.9.2 Power-frequency electric strength		$U_i = 1000 \text{ V AC}$
10.9.3 Impulse withstand voltage		8 kV
10.9.4 Testing of enclosures made of insulating material		Meets the product standard's requirements.
10.10 Temperature rise		The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating		Is the panel builder's responsibility.
10.12 Electromagnetic compatibility		Is the panel builder's responsibility.
10.13 Mechanical function		Meets the product standard's requirements.

## Dimensions

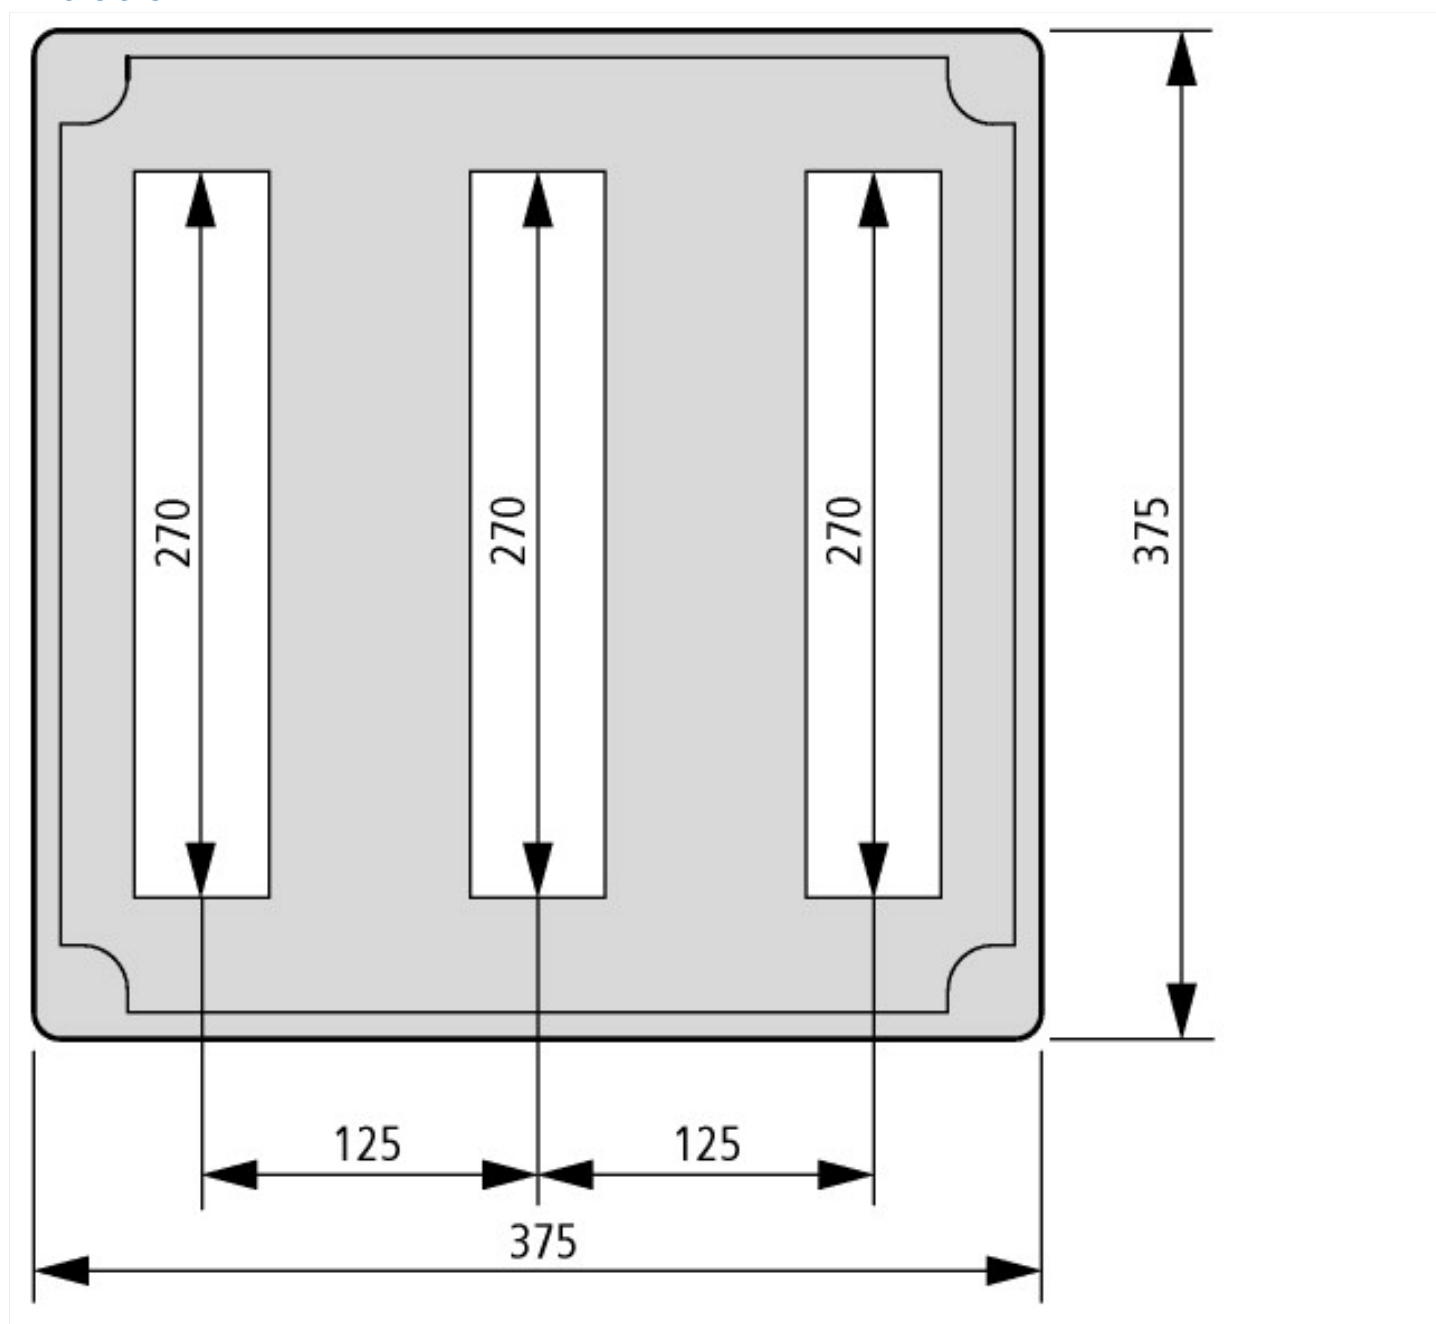

## Additional product information (links)

Manufacturer's Declaration CI-RoHS	<a href="ftp://ftp.moeller.net/DOCUMENTATION/PDF/2013-01-31_Ci_RoHS.pdf">ftp://ftp.moeller.net/DOCUMENTATION/PDF/2013-01-31_Ci_RoHS.pdf</a>
Declaration of conformity	<a href="ftp://ftp.moeller.net/DOCUMENTATION/PDF/ci_ce.pdf">ftp://ftp.moeller.net/DOCUMENTATION/PDF/ci_ce.pdf</a>

