




**Panel enclosure, with gland plate and cable glands,
HxWxD=750x375x275mm**

Part no. KST48-250
Article no. 010450

Delivery program

Product range			Ci insulated enclosures
Basic function			Basic enclosures
Product function			Panel enclosure with gland plates fitted
Single unit/Complete unit			Stand-alone device
Degree of Protection			IP65
Description			Sealable cover fasteners Sides closed, but with full area knockout Open top Fitting of cable supports in the distribution board with wedge-lock fastener Gland plate can be split, cables can be inserted from the front
Model base			Plain
Type cover			Transparent
Width		mm	375
Height		mm	750
Depth		mm	275
Mounting depth with mounting plate		mm	250
Mounting depth for mounting rail 7.5 mm height		mm	242.5
Mounting depth for mounting rail 15 mm height		mm	235
Dimensions		mm	
Enclosure depth			
Legend for the graphic			Dimensions from top: Mounting depth with mounting plate Mounting depth for mounting rail 7.5 mm height Mounting depth for mounting rail 15 mm height Enclosure depth

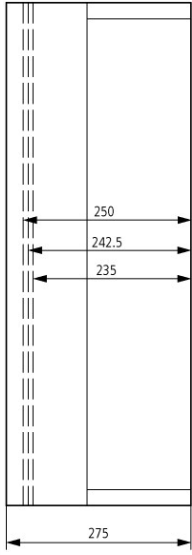Enclosure depth	mm	
Cable entry		3 x 14 - 68
Notes		
Distribution board with/without gland plates fitted		
<ul style="list-style-type: none"> Cover transparent, cover fasteners can be sealed 		
CI distribution board enclosure without cable gland plates		
<ul style="list-style-type: none"> Degree of protection IP65 Sides closed, but with full area knockout, open top and bottom 		
KST distribution board enclosure with cable gland plates fitted		
<ul style="list-style-type: none"> Degree of protection IP65 from below Sides closed, but with full area knockout, open at top Fitting of cable supports in the distribution board with wedge-lock fastener Gland plate can be split, cables can be inserted from the front 		

Technical data

General

Ambient temperature	°C	-40 - +80
Ambient temperature		
Mean value over 24 hours	°C	35
Limit values	°C	
Ambient temperature limit value min.	°C	-5
Ambient air temperature, limit values max.	°C	40
Degree of Protection		IP65
Protection type		IP65 (Enclosure) IP65 (KST cable entries from below) IP64 (KST cable entries from above) IP00 (Cable entry open)
Components		Switchgear assembly components are type-tested. They are available individually for the self-assembly of switchgear installations, distribution boards and control panels.
Devices that can be fitted		The reference values indicated in the table apply to the basic elements of the distribution board. As far as devices, terminals etc. fitted into the enclosures are concerned, their own specific technical data and rated values apply.
Standards		
TTA - Type Tested Assemblies		IEC/EN 60439-1, VDE 0660 Part 500
Low-voltage fuses		IEC/EN 60269, VDE 0636
Type test		VDE 0660 Part 500, IEC/EN 60439-1
Creepage and clearance distances		III/3 to IEC/EN 60439-1
Flammability characteristics - Glow rod test		VDE 0304 Part 3 level IIb, level IIb to IEC 60707
Regulation for the fire resistance tests of electrical products, their modules and components, glow wire test		VDE 0471 Part 2
Operating and ambient conditions to VDE 0660 Part 500		
Ambient temperature		
Mean value over 24 hours	°C	35

Limit values		°C	-5 ... 40
Indoor installation			
Relative humidity			90 % (at 20°C) 50% (at 40°C)
Altitude		m	Max. 2000
Protection type			IP65 (Enclosure) IP65 (KST cable entries from below) IP64 (KST cable entries from above) IP00 (Cable entry open)
Mounting grid		mm	25 (DIN 43660)
Colour			
Base			RAL 7032, pebble grey
Housing body			Transparent, colourless or RAL 7032, pebble grey
			Cl...-NA: Transparent cover, opaque
Surface finish			Galvanized Passivated

Material characteristics


Surface finish			Galvanized Passivated
Colour			
Base			RAL 7032, pebble grey
Housing body			Transparent, colourless or RAL 7032, pebble grey

Design verification as per IEC/EN 61439

Technical data for design verification			
Heat dissipation, at an ambient temperature of 35°C, delta T: 20 degrees, calculated as per IEC 60890			
Individual enclosure for wall mounting	P _V	CO	52
Starting enclosure for wall mounting	P _V	CO	48
Middle enclosure for wall mounting	P _V	CO	44
Heat dissipation, at an ambient temperature of 35°C, delta T: 35 degrees, calculated as per IEC 60890			
Individual enclosure for wall mounting	P _V	CO	105
Starting enclosure for wall mounting	P _V	CO	96
Middle enclosure for wall mounting	P _V	CO	88
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			
			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			
			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			
			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			
			Lower part: 960 °C / cover: 850 °C; meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			
			Not relevant to indoor installations.
10.2.5 Lifting			
			40 kg per enclosure with support frame and lifting aid met, assembled and secured as per the latest applicable instruction leaflet.
10.2.6 Mechanical impact			
			IK10
10.2.7 Inscriptions			
			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			
			IP65
10.4 Clearances and creepage distances			
			Is the panel builder's responsibility.
10.5 Protection against electric shock			
			Protection class 2, therefore not applicable.
10.6 Incorporation of switching devices and components			
			Is the panel builder's responsibility.
10.7 Internal electrical circuits and connections			
			Is the panel builder's responsibility.
10.8 Connections for external conductors			
			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			
			U _i = 1000 V AC
10.9.3 Impulse withstand voltage			
			8 kV
10.9.4 Testing of enclosures made of insulating material			
			Meets the product standard's requirements.
10.10 Temperature rise			
			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.

10.11 Short-circuit rating		Is the panel builder's responsibility.
10.12 Electromagnetic compatibility		Is the panel builder's responsibility.
10.13 Mechanical function		Meets the product standard's requirements.

Dimensions

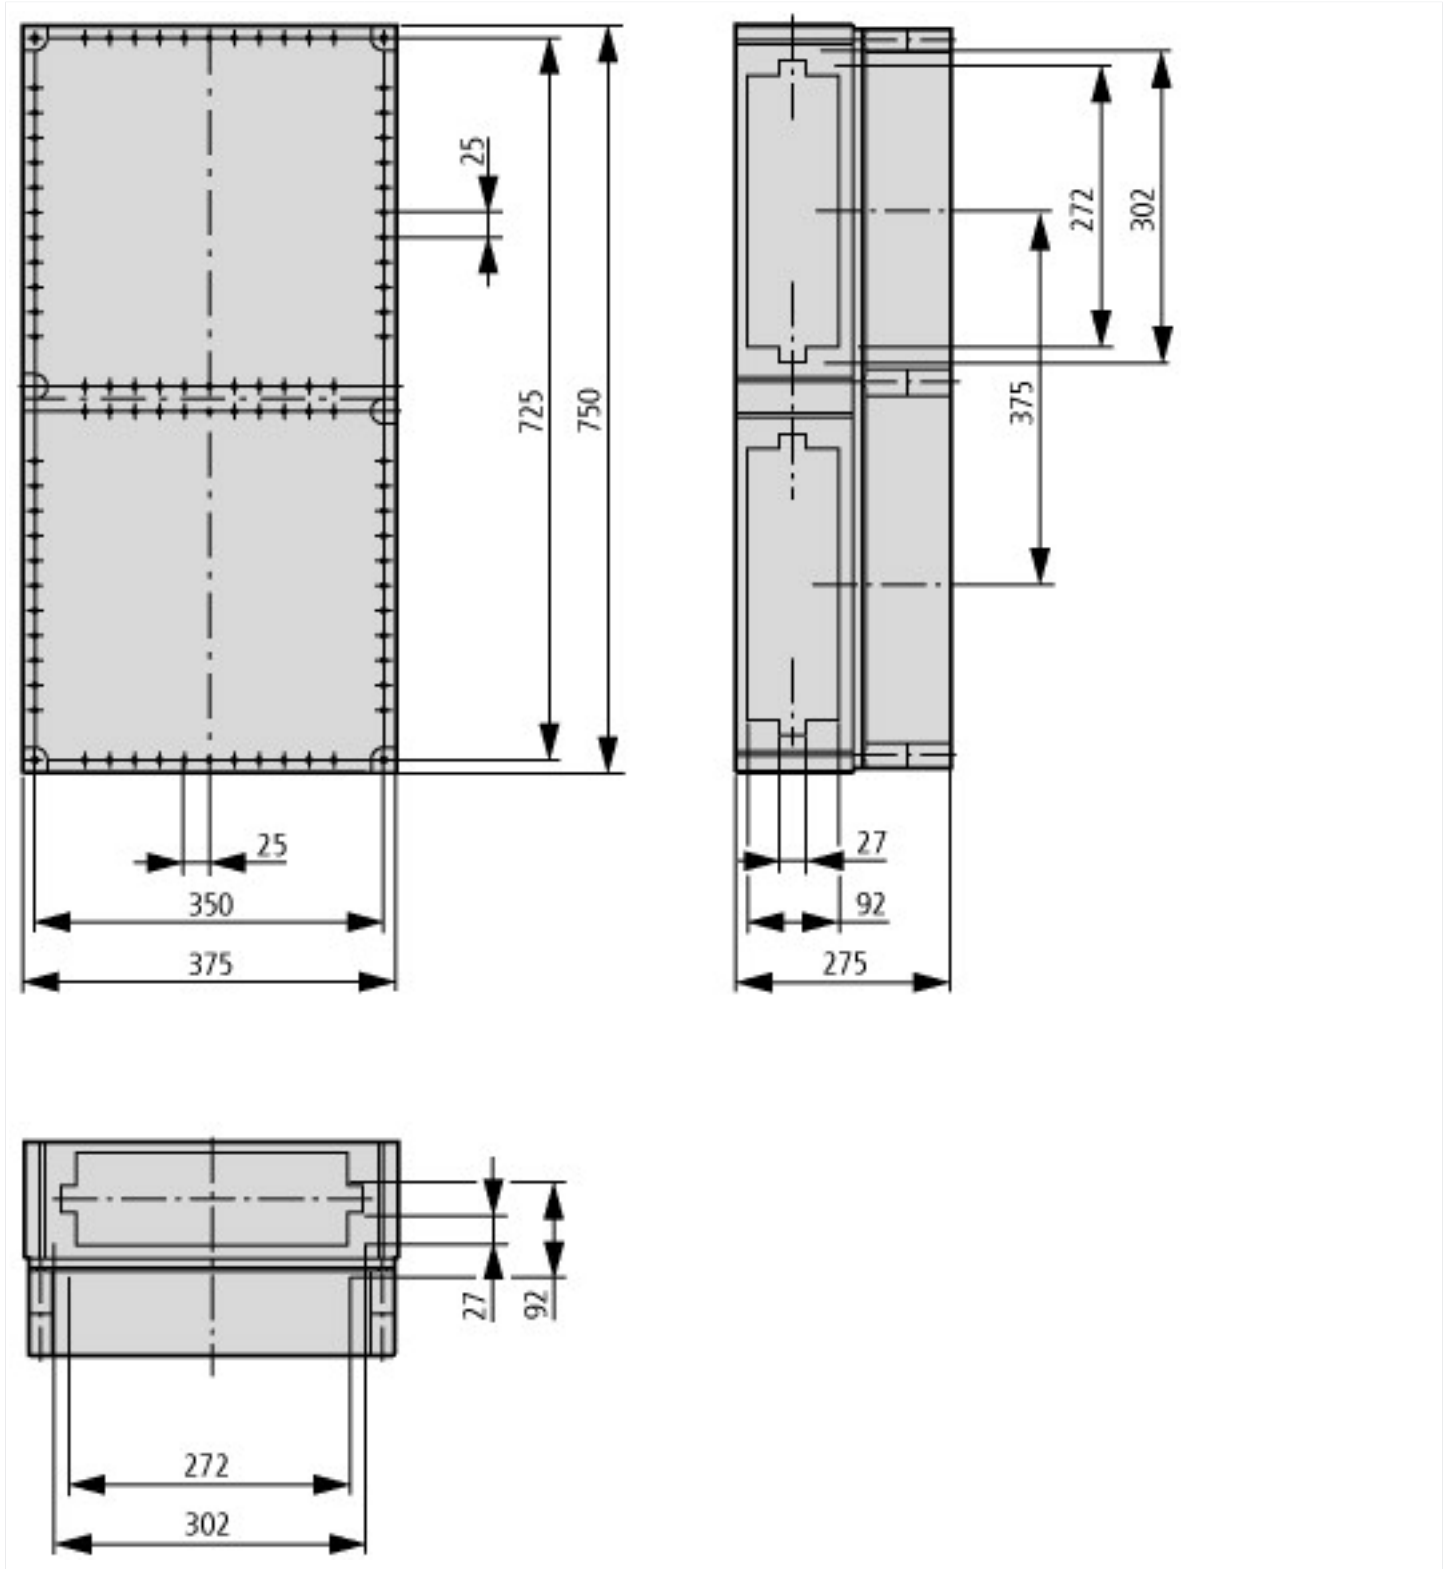

Additional product information (links)

AWA3200-0572 Gland plates	
AWA3200-0572 Gland plates	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/05720588.pdf
Manufacturer's Declaration CI-RoHS	ftp://ftp.moeller.net/DOCUMENTATION/PDF/2013-01-31_Ci_RoHS.pdf
Declaration of conformity	ftp://ftp.moeller.net/DOCUMENTATION/PDF/ci_ce.pdf