

LARA LED

THORN_{eco}

EN Installation instructions
DE Montageanleitung
CZ Montážní návod
DK Monteringsvejledning
EE Paigaldusjuhend
FI Asennusohje
FR Notice de montage
HU Szerelési útmutat



IT Istruzioni di montaggio
LT Montavimo instrukcijos
LV Instalācijas instrukcija
NO Monteringsanvisning
PL Instrukcja montażu
SE Installationsanvisning
RU Инструкция по монтажу
CN 安装说明书



1. Installation and commissioning may only be carried out by authorized specialists and wired in accordance with the latest IEE electrical regulations or the national standard.
2. Mains power must be switched off before carrying out installation.
3. The manufacturer shall not be liable for any damage resulting from inappropriate modifications to the luminaire or faulty installation.
4. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
5. Caution, risk of electric shock.
The control gear provides basic insulation between the LV supply and the control circuit.


Product Description	Wattage	SAP Code	Height (H)	Diameter (D)
LARA LED 250 800 840 MWS WH	10W	96666109	70	Ø250
LARA LED 250 800 840 MWS BLK	10W	96666110	70	Ø250
LARA LED 250 800 840 MWS WH E3	10W	96666111	70	Ø250
LARA LED 250 800 840 MWS BLK E3	10W	96666112	70	Ø250
LARA LED 300 1200 840 MWS WH	13W	96666113	70	Ø300
LARA LED 300 1200 840 MWS BLK	13W	96666114	70	Ø300
LARA LED 300 1200 840 MWS WH E3	13W	96666115	70	Ø300
LARA LED 300 1200 840 MWS BLK E3	13W	96666116	70	Ø300

All dimensions in mm



Optional trim accessory	SAP Code	Size (diameter)	Trim colour
LARA BEZEL TRIM SMALL 250 WH	96666121	Ø250	White
LARA BEZEL TRIM LARGE 300 WH	96666122	Ø300	White
LARA BEZEL TRIM SMALL 250 BLK	96666123	Ø250	Black
LARA BEZEL TRIM LARGE 300 BLK	96666124	Ø300	Black
LARA EYELID TRIM SMALL 250 BLK	96666125	Ø250	Black
LARA EYELID TRIM LARGE 300 BLK	96666126	Ø300	Black
LARA EYELID GRILLE TRIM SMALL 250 BLK	96666127	Ø250	Black
LARA EYELID GRILLE TRIM LARGE 300 BLK	96666128	Ø300	Black
LARA GRILLE TRIM SMALL 250 BLK	96666129	Ø250	Black
LARA GRILLE TRIM LARGE 300 BLK	96666130	Ø300	Black

1	x1
2	x2
3	Ø250x3 / Ø300x4
4	x4
5	x1
6	x1



MWS

DEFAULT → 100%
DÉFAUT ⌚ 5min
STANDARD ⚙ Disabled

Detection Area →



	1	2	3	
I	●	●	●	100%
II	○	●	●	75%
III	○	○	●	50%
IV	○	○	○	30%
V	○	○	○	10%

Hold Time ⌚

	1	2	3	
I	●	●	●	5s
II	○	●	●	30s
III	○	○	●	1min
IV	○	○	○	5min
V	○	○	○	10min
VI	○	○	○	20min
VII	○	○	○	30min


Daylight Sensor 🌙 ⚙

	1	2	3	
I	●	●	●	Disable
II	○	●	●	50lux
III	○	○	●	20lux
IV	○	○	○	5lux
V	○	○	○	2lux

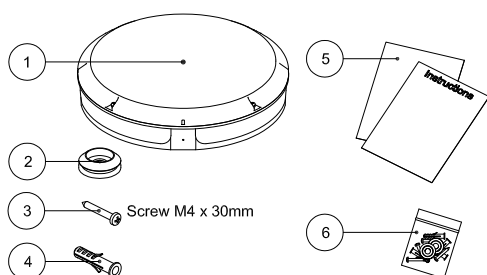


LARA LED

1




OFF


2

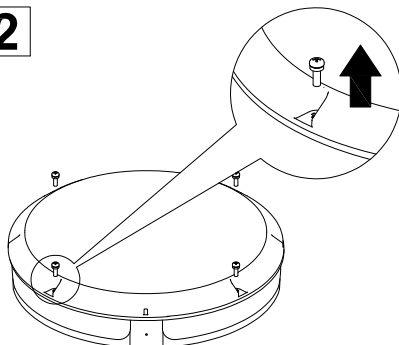

3




4

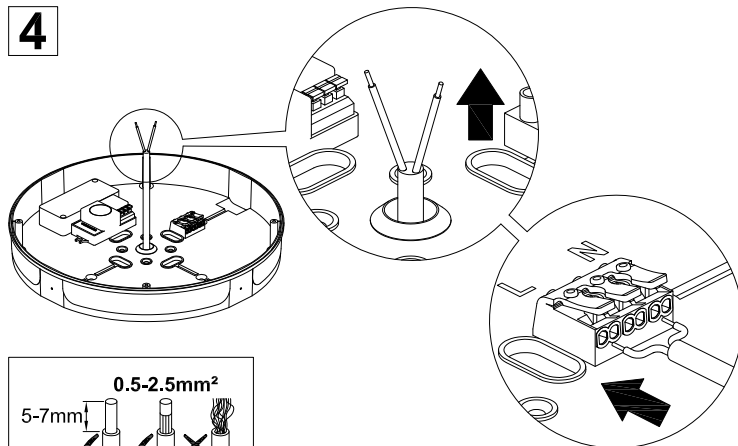


0.5-2.5mm²
5-7mm


5

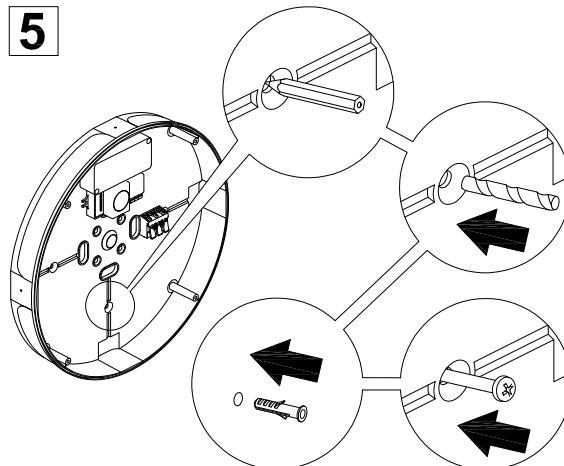



6

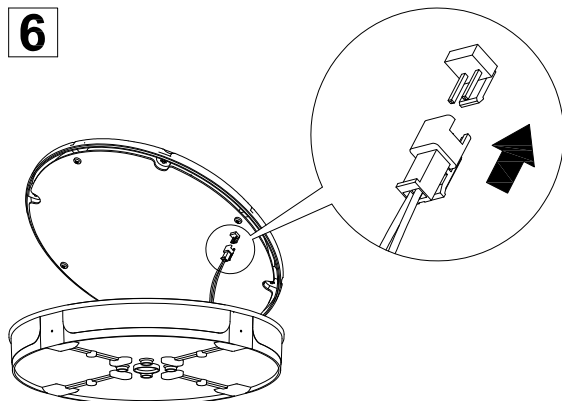

7

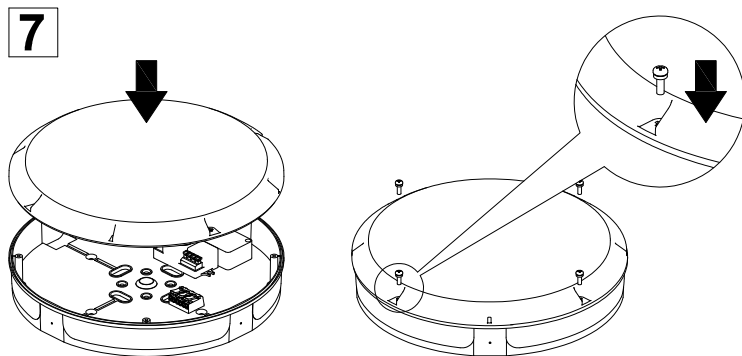



E3

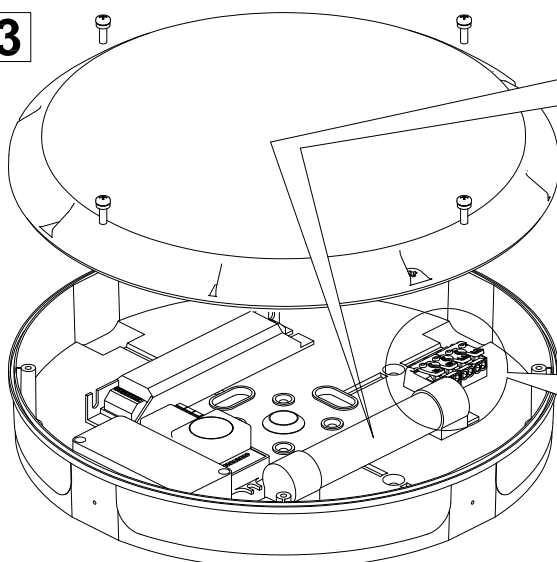


Accu-NiCd 50 4A

CONNECT BATTERY
(Ensure that emergency
supply is continuous.)
Check if green indicator LED is lit.

Installer to add date of installation
onto battery.



8



ON