



Photo 1: LED 025 with on/off switch and magnet fixing
Photo 2: LED 025 with movement sensor and screw fixing

- Wide voltage range**
- Integrated power unit**
- Daisy chain**
- Long-lived, maintenance-free**
- Magnet or screw fixing**
- On/off switch or movement sensor**
- Energy-saving by LED technology**


The lamp series LED 025 is suitable for all types of panels and enclosures, especially where space is at a premium. The lamps have a very long service life thanks to the use of LED technology. They are available with powerful non-slip rubberized magnets allowing them to be quickly positioned in any steel enclosure. Alternatively they can be fixed mechanically. The power output allows up to 10 lamps to be connected to each other (daisy chain). Both the power input and output connectors snap lock into their sockets. With the integrated power unit and the plugs the lamp can quickly be connected.



Technical Data

Power consumption	max. 5W
Luminosity	290Lm at 120° (870Lm at 360° or equivalent 75W light bulb)
Lamp type	LED, angle of radiation 120° light color: daylight, color temperature: 6,500K
Service life	60,000h at 20°C (68°F)
Connection	2-pole connector with snap lock AC: max. 2.5A / 240VAC, color: white DC: max. 2.5A / 60VDC, color: blue
Mounting	magnet fixing or screw fixing, M5, 250mm centers
Casing	plastic, transparent
Dimensions	351 x 34 x 32mm (with magnet fixing) 351 x 36 x 32mm (with screw fixing)
Operating / Storage temperature	-30 to +60°C (-22 to +140°F) / -40 to +85°C (-40 to +185°F)
Operating / Storage humidity	max. 90% RH (non-condensing)
Protection type / Protection class	IP20 / II (double insulated)
Approvals	UL File No. E234324, VDE intended

Important note: Connectors and cables for electrical connection are not included in the delivery. These parts need to be ordered separately, see Accessories on next page.

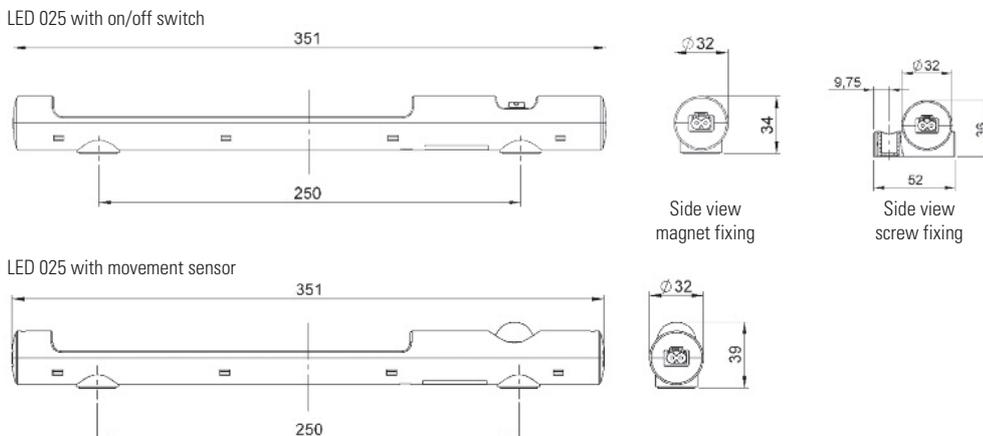

Art. No. magnet fixing	Art. No. Screw fixing	Operating voltage	Switch	Weight (approx.)
02540.0-00	02540.0-01	100-240VAC, 50/60Hz (min. 90VAC, max. 265VAC)	on/off light switch	0.2kg
02540.1-00	02540.1-01	24-48VDC (min. 20VDC, max. 60VDC)	on/off light switch	0.2kg
02541.0-00	02541.0-01	100-240VAC, 50/60Hz (min. 90VAC, max. 265VAC)	PIR movement sensor ¹	0.2kg
02541.1-00	02541.1-01	24-48VDC (min. 20VDC, max. 60VDC)	PIR movement sensor ¹	0.2kg

¹ approx. 5 min. fixed switch-on duration

Connection cable with female connector and open end



Photo: Connection cable, Art. No. 244356

Art. No.	Model	Length	Voltage type	Color	Use for
244356	connection cable 2x1.5mm ² with female connector	2.0m	AC	connector: white; cable: white	power input
244357 ²	connection cable 2xAWG 16 with female connector	2.0m	AC	connector: white; cable: white	power input
244360	connection cable 2x1.5mm ² with female connector	2.0m	DC	connector: blue; cable: white	power input
244361 ²	connection cable 2xAWG 16 with female connector	2.0m	DC	connector: blue; cable: white	power input

² cable and connectors are UL recognized components

Extension cable with 2 connectors for daisy chain connection



Photo: Extension cable, Art. No. 244358

Art. No.	Model	Length	Voltage type	Color	Use for
244358	extension cable 2x1.5mm ² with 2 connectors	1.0m	AC	connectors: white; cable: white	daisy chain
244359 ²	extension cable 2xAWG 16 with 2 connectors	1.0m	AC	connectors: white; cable: white	daisy chain
244362	extension cable 2x1.5mm ² with 2 connectors	1.0m	DC	connectors: blue; cable: white	daisy chain
244363 ²	extension cable 2xAWG 16 with 2 connectors	1.0m	DC	connectors: blue; cable: white	daisy chain

² cable and connectors are UL recognized components

Female / Male connectors




Photo: Female connector, Art. No. 264057



Photo: Male connector, Art. No. 264058

Art. No.	Model	Voltage type	Color	Use for	Approvals
264057	female connector	AC	white	power input	VDE + UL
264058	male connector	AC	white	power output	VDE + UL
264059	female connector	DC	blue	power input	VDE + UL
264060	male connector	DC	blue	power output	VDE + UL

Connection Example

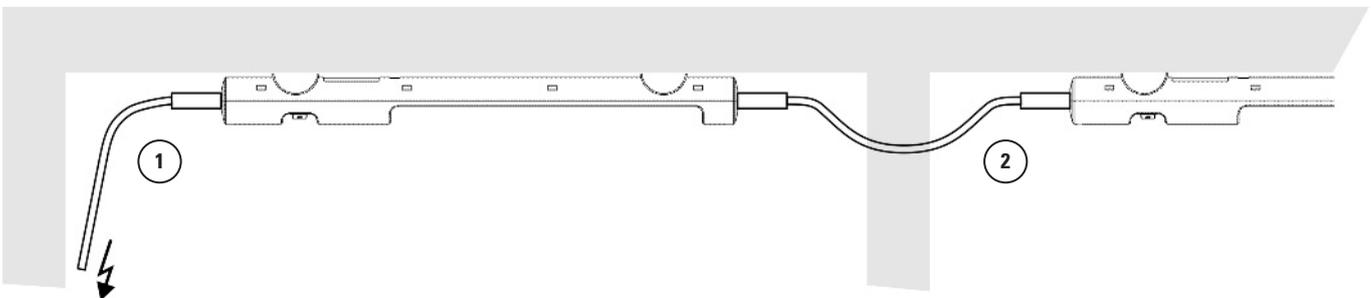

This illustration shows the LED 025 lamp in a daisy chain application. The lamps are conveniently connected via quick connection plugs – up to 10 lamps max. can be daisy-chained this way. The snap lock connectors ensure a stable electrical connection even if subjected to heavy vibration. The connection example shows a 230VAC application, using the following cables: connection cable with female connector, Art. No. 244356 (1); daisy chain extension cable with 2 connectors, Art. No. 244358 (2).

Female/male connectors are also available to assemble cables in non-standard lengths.