Article number: 1010606

theLuxa P220 BK Article number: 1010606

Description




- Motion detector (PIR)
- Automatic lighting control based on presence and brightness
- 220° detection angle
- For outdoor use
- For installation on walls and ceilings
- For larger, commercial outdoors properties such as offices, public buildings, hotels, schools, car parks and warehouses
- Adjustable brightness switching value and switch-off delay
- Sensitivity can be reduced to limit detection area
- Area limit via lens attachment
- Mixed light measurement suitable for the control of fluorescent, incandescent, halogen lamps and LEDs
- Teach-in of current brightness value possible
- Pulse function
- Test function for checking detection area
- Installation on flush-mounted socket possible (60 mm)
- Single-handed plug-in installation
- Instant start-up possible via factory preset
- Controls are place protected
- Terminal for protective earth conductor
- Spacer included in delivery

Technical data

| Operating voltage | 230 V AC | |
|---|---|--|
| Frequency | 50 Hz | |
| Stand-by consumption | ~0,3 W | |
| Light measurement | Mixed light measurement | |
| Number of channels | 1 | |
| Installation type | Wall and ceiling installation | |
| Setting range brightness | 5 – 1000 lx | |
| Switching capacity light | 10 A (at 230 V AC, $\cos \phi$ = 1), , 10 AX (at 230 V AC, $\cos \phi$ = 0.3) | |
| Detection angle | 220° | |
| Light switch-off delay | 1 s-20 min | |
| Incandescent lamp load | 2300 W | |
| Fluorescent lamp load (conventional) parallel-corrected | 1300 VA 140 μF | |
| Energy saving lamps | 300 W | |
| LED lamp | < 2 W = 60 W or > 2 W < 8 W = 180 W or > 8 W = 200 W | |
| Lamps | Incandescent/halogen lamps, fluorescent lamps, Energy saving lamps, LEDs | |
| Ambient temperature | -25 °C +45 °C | |
| Protection class | II | |
| Type of protection | IP 55 | |


Article number: 1010606

Connection example




Detection range

| Mounting height (A) | Head on to (r) | Diagonally (t) |
|---------------------|----------------|----------------|
| 2,5 m | 5 m | 16 m |



Scale drawings

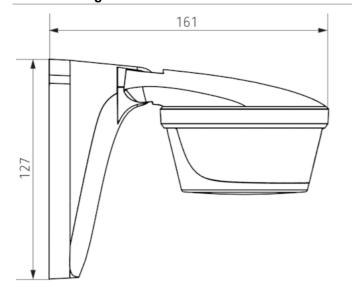



Article number: 1010606

Accessories

Corner angle theLuxa P BK

■ Article number: 9070905 Details ► www.theben.de



theSenda S

■ Article number: 9070911 Details ► www.theben.de



Spacer theLuxa P BK

■ Article number: 9070909 Details ► www.theben.de



theSenda P

■ Article number: 9070910 Details ► www.theben.de



