


569020 - UNIPOLAR DISTRIBUTION BLOCK UD 125A

IEC 60947-7-1

UL-1059

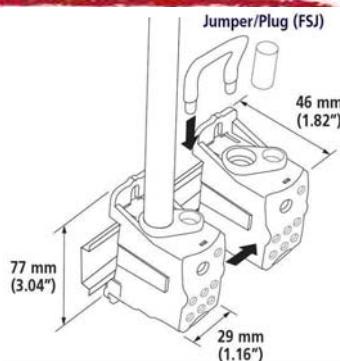

Part No	Description			
569020	UNIPOLAR DISTRIBUTION BLOCK UD 125 A	1	0,15 kg	0.33 lbs

□ Accessories:

Part No	Description			
569150	JUMPER FSJ FOR UD 125A -160A	25	0,03 kg	0.07 lbs

□ Technical data:

- Visual inspection of wire and confirmation of connection
- Halogen Free
- IP 20 finger safe
- 95% fill ratio
- Self extinguishing plastic v0
- Tinned copper blocks
- Center to center drilling: 64 mm (2.53")
- I = 125 A IEC
- I = 150 A UL/CSA
- Icw KA rms 1s: 4,2
- IPk KÂ: 30
- Ui: 690 V IEC
- Vin: 600 V UL

□ **Input/Output:**

	METRIC mm²	IMPERIAL AWG			Γ (N.m)	Torque Inch/Lbs	
	10 → 35	8 → 1/0	x1	x1	6,4	57	
	6 → 16*	14 → 2	x1	x1	3,5	31	
	2,5 → 16	14 → 4	x6	x4	3,5	31	



Without terminal, rigid cable



With terminal



Input



Output

* or common jumper

□ **Certificates:**

- CE Conformity
- ROHS 2002/95/EC Compliance
- IEC 60947-7-1 Compliance
- UL