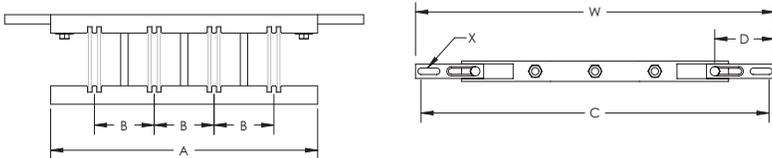# Compact Busbar Support with Neutral Circuit – CBS-B2-5TN (551151)



- Compact design fits in 400 mm (15 3/4") deep panels
- Includes mounting holes for direct fixing of protection screen
- Installs quickly and easily
- Halogen free
- RoHS compliant



| Part Number | CBS-B2-5TN |
|---|---|
| Article Number | 551151 |
| Material | Aluminum<br>Glass Fibre Reinforced Polyamide |
| Max Working Voltage, IEC (Ui) | 1,000 VAC<br>1,500 VDC |
| Typical Application Current Rating | 250 – 1,600 A |
| Working Temperature | -40 to 130 °C |
| Complies With | IEC® 60439.1<br>IEC® 61439.1 |
| Flammability Rating | UL® 94V-0 |
| Busbar Width | 25 – 80 mm |
| Busbars per Phase | 1 – 2 |
| Busbar Thickness | 5 mm |
| Width (W) | 338 – 390 mm |
| A | 290 mm |
| B | 65 mm |
| C | 325 – 377 mm |
| D | 65 mm |
| X | 6.5 x 23 mm |
| Unit Weight | 0.2 kg |
| Certifications | CE<br>EAC 8546901000 (Russian Federation)<br>IEC 61439-1 Busbar Supports<br>RoHS |

| Part Number | CBS-B2-5TN |
| --- | --- |
| Standard Packaging Quantity | 1 pc |
| UPC | 78285687618 |
| EAN-13 | 3479775511511 |

**ERIFLEX**

**PENTAIR**