

Sense5000lm Prism White



Article code: **5046 212165**
EAN: 7021982121654



Light technic

Version: 5000lm Prism
Type of light source: LED (not exchangeable)
System wattage: 42.0W
Luminous flux: 5046lm
Efficacy: 121 lm/W
Colour temperature: 4000K
Colour rendering (CRI): Ra>90
MacAdams factor: SDCM: 3
Lifetime: L80/B20>50,000
Light distribution: Direct
Optic: Plastic opal prism
Beam angle: 110°

Control/Dimming

Type: Driver ordered separately (lumen output depending on driver)

Protection

Luminaire class: Class III
Ingress protection rating: IP44
Ta nominal: Ta=25°C

Energy and approvals

Energy class: A+
Approval: CE

Materials and finish

Housing: Aluminium
Colour: White
Optics: PMMA Polymethylmethacrylat

Mounting/Connection

Mounting: Recessed, Indoor
Module: 600x600 Exposed T-carrier 15/24mm
Plug: Quick connector

Dimensions (mm)

Length (L): 597
Width (W): 597
Height (H): 10
Weight (brutto/netto): 4.654 / 4.454

Packaging

Packing dimensions: 635 x 635 x 43



DRIVER & EMERGENCY OPTIONS

1400mA • 46W • 5000lm

On/Off Driver - Schuco
1400mA • 5000lm • 46W • Class I
Prod.nr. 820062
NO-EL.nr. 66 000 75
SE-EL.nr. 79 813 72
P/E-EL.nr. 40 033 04
EAN 702198200827



DALI / 1-10V Driver - 3-pol Lineact
1400mA • 5000lm • 46W • Class I
Prod.nr. 820065
NO-EL.nr. 66 000 76
SE-EL.nr. 79 813 75
P/E-EL.nr. 40 033 05
EAN 702198200858



On/Off Driver - 3-pol Lineact
1400mA • 5000lm • 46W • Class I
Prod.nr. 820402
NO-EL.nr. 66 000 57
SE-EL.nr. 79 818 68
P/E-EL.nr. 40 033 49
EAN 702198204023




External Emergency Box • 3 hours Emergency

Emergency box
On-Off/Phase Dim / Emergency Self test
Prod.nr. 094364
NO-EL.nr. 66 004 43
SE-EL.nr. 73 445 88
P/E-EL.nr. 42 239 28
EAN 5703821177276



Emergency box
Driver DALI / Emergency DALI Self test
Prod.nr. 094500
NO-EL.nr. 66 006 04
SE-EL.nr. 73 453 02
P/E-EL.nr. 42 255 22
EAN 5703821177504

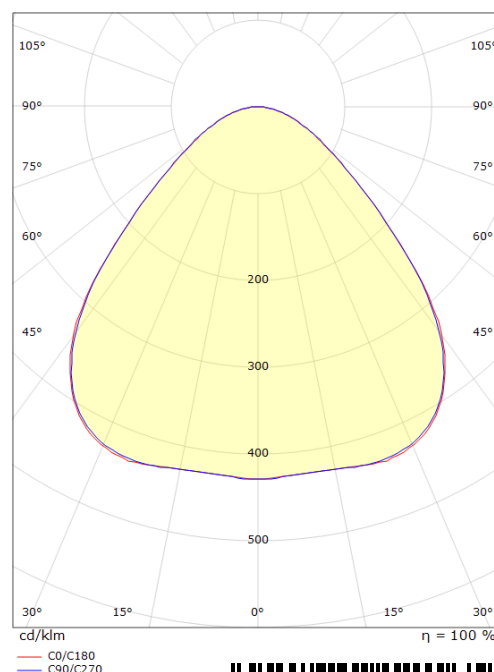

7 0 2 1 9 8 2 1 2 1 6 5 4