




Reversing starter, 3p, 1.5kW/400V/AC3, 100kA, +busbar adapter

Part no. **MSC-R-4-M7(24VDC)/BBA**
Catalog No. **103003**
Alternate Catalog No. **XTSR004B007BTNDL-A**
EL-Nummer (Norway) **4315464**

EATON

Powering Business Worldwide™

Delivery program

| | | | |
|---|--|----|------------|
| Basic function | Reversing starters (complete devices) | | |
| Basic device | MSC | | |
| |  | | |
| Notes | Also suitable for motors with efficiency class IE3. IE3-ready devices are identified by the logo on their packaging. | | |
| Connection to SmartWire-DT | no | | |
| Motor ratings | | | |
| Motor rating | | | |
| AC-3 | | | |
| 380 V 400 V 415 V | P | kW | 1.1 1.5 |
| Rated operational current | | | |
| AC-3 | | | |
| 380 V 400 V 415 V | I _e | A | 2.6 3.6 |
| Rated short-circuit current 380 - 415 V | I _q | kA | 100 |
| Setting range | | | |
| Setting range of overload releases | I _r | A | 2.5 - 4 |
|  | | | |
| Coordination | Type of coordination "1" Type of coordination "2" | | |
| Contact sequence |  | | |
| Actuating voltage | 24 V DC DC voltage | | |
| Motor-protective circuit-breakers PKZM0-4 | | | |
| Contactor DILM7-01(...) | | | |
| DOL starter wiring set | | | |
| Mechanical connection element and electrical electric contact module PKZM0-XRM12 | | | |
| Notes | | | |
| The reversing starter (complete units) consists of a PKZM0 motor protective circuit breaker and two DILM contactors. | | | |
| These combinations are mounted on the busbar adapters. | | | |
| The connection of the main circuit between the motor protective circuit breaker and the contactor is established with an electrical contact module. | | | |
| Complete units with mechanical interlock, starters up to 12 A also feature electrical interlock. | | | |
| Further information | | | |
| Technical data PKZM0 | Page | | |
| Accessories PKZ | → PKZM0 | | |
| Technical data DILM | → 072896 | | |
| Accessories DIL | → DILM | | |
| | → 281199 | | |

Technical data

General

| | | |
|-----------|--|---|
| Standards | | UL 508 (on request) CSA C 22.2 No. 14 (on request) |
|-----------|--|---|

Main conducting paths

| | | | |
|--------------------------------------|-----------|------|-----------|
| Rated impulse withstand voltage | U_{imp} | V AC | 6000 |
| Oversupply category/pollution degree | | | III/3 |
| Rated operational voltage | U_e | V | 230 - 415 |
| Rated operational current | | | |
| Open, 3-pole: 50 - 60 Hz | | | |
| 380 V 400 V | I_e | A | 4 |

Additional technical data

| | | |
|---|--|---|
| Motor protective circuit breaker PKZM0, PKE | | PKZM0 motor-protective circuit-breakers, see motor-protective circuit-breakers/ PKZM0 product group |
| | | DILM contactors, see contactor product group DILET timing relay, ETR, see contactors, electronic timing relays product group |

Power consumption

| | | | |
|-------------|---------|---|---|
| DC operated | Sealing | W | 3 |
|-------------|---------|---|---|

Rating data for approved types

| | | | |
|--------------------|--|---|------|
| Auxiliary contacts | | | |
| Pilot Duty | | | |
| AC operated | | | A600 |
| DC operated | | | P300 |
| General Use | | | |
| AC | | V | 600 |
| AC | | A | 15 |
| DC | | V | 250 |
| DC | | A | 1 |

Design verification as per IEC/EN 61439

| | | | |
|--|------------|----|--|
| Technical data for design verification | | | |
| Rated operational current for specified heat dissipation | I_n | A | 4 |
| Heat dissipation per pole, current-dependent | P_{vid} | W | 2 |
| Equipment heat dissipation, current-dependent | P_{vid} | W | 6 |
| Static heat dissipation, non-current-dependent | P_{vs} | W | 2.6 |
| Heat dissipation capacity | P_{diss} | W | 0 |
| Operating ambient temperature min. | | °C | -25 |
| Operating ambient temperature max. | | °C | 55 |
| IEC/EN 61439 design verification | | | |
| 10.2 Strength of materials and parts | | | |
| 10.2.2 Corrosion resistance | | | Meets the product standard's requirements. |
| 10.2.3.1 Verification of thermal stability of enclosures | | | Meets the product standard's requirements. |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat | | | Meets the product standard's requirements. |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects | | | Meets the product standard's requirements. |
| 10.2.4 Resistance to ultra-violet (UV) radiation | | | Meets the product standard's requirements. |
| 10.2.5 Lifting | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 Mechanical impact | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.7 Inscriptions | | | Meets the product standard's requirements. |
| 10.3 Degree of protection of ASSEMBLIES | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.4 Clearances and creepage distances | | | Meets the product standard's requirements. |
| 10.5 Protection against electric shock | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.6 Incorporation of switching devices and components | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.7 Internal electrical circuits and connections | | | Is the panel builder's responsibility. |
| 10.8 Connections for external conductors | | | Is the panel builder's responsibility. |
| 10.9 Insulation properties | | | |
| 10.9.2 Power-frequency electric strength | | | Is the panel builder's responsibility. |
| 10.9.3 Impulse withstand voltage | | | Is the panel builder's responsibility. |

| | | |
|--|--|--|
| 10.9.4 Testing of enclosures made of insulating material | | Is the panel builder's responsibility. |
| 10.10 Temperature rise | | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.12 Electromagnetic compatibility | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.13 Mechanical function | | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Motor starter/Motor starter combination (EC001037)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Load breakout, motor breakout / Motor starter combination (ecl@ss10.0.1-27-37-09-05 [AJZ718013])


| | | |
|--|----|-------------------|
| Kind of motor starter | | Reversing starter |
| With short-circuit release | | Yes |
| Rated control supply voltage Us at AC 50HZ | V | 0 - 0 |
| Rated control supply voltage Us at AC 60HZ | V | 0 - 0 |
| Rated control supply voltage Us at DC | V | 24 - 24 |
| Voltage type for actuating | | DC |
| Voltage type for actuating | | DC |
| Rated operation power at AC-3, 230 V, 3-phase | kW | 0.75 |
| Rated operation power at AC-3, 400 V | kW | 1.5 |
| Rated power, 460 V, 60 Hz, 3-phase | kW | 0 |
| Rated power, 575 V, 60 Hz, 3-phase | kW | 0 |
| Rated operation current Ie | A | 3.6 |
| Rated operation current at AC-3, 400 V | A | 4 |
| Overload release current setting | A | 2.5 - 4 |
| Rated conditional short-circuit current, type 1, 480 Y/277 V | A | 0 |
| Rated conditional short-circuit current, type 1, 600 Y/347 V | A | 0 |
| Rated conditional short-circuit current, type 2, 230 V | A | 50000 |
| Rated conditional short-circuit current, type 2, 400 V | A | 50000 |
| Number of auxiliary contacts as normally open contact | | 0 |
| Number of auxiliary contacts as normally closed contact | | 0 |
| Ambient temperature, upper operating limit | °C | 60 |
| Temperature compensated overload protection | | Yes |
| Release class | | CLASS 10 |
| Type of electrical connection of main circuit | | Screw connection |
| Type of electrical connection for auxiliary- and control current circuit | | Screw connection |
| Rail mounting possible | | Yes |
| With transformer | | No |
| Number of command positions | | 0 |
| Suitable for emergency stop | | No |
| Coordination class according to IEC 60947-4-3 | | Class 2 |
| Number of indicator lights | | 0 |
| External reset possible | | No |
| With fuse | | No |
| Degree of protection (IP) | | IP20 |
| Degree of protection (NEMA) | | Other |
| Supporting protocol for TCP/IP | | No |
| Supporting protocol for PROFIBUS | | No |
| Supporting protocol for CAN | | No |
| Supporting protocol for INTERBUS | | No |
| Supporting protocol for ASI | | No |
| Supporting protocol for MODBUS | | No |
| Supporting protocol for Data-Highway | | No |
| Supporting protocol for DeviceNet | | No |

| | | |
|---|----|-----|
| Supporting protocol for SUCONET | | No |
| Supporting protocol for LON | | No |
| Supporting protocol for PROFINET IO | | No |
| Supporting protocol for PROFINET CBA | | No |
| Supporting protocol for SERCOS | | No |
| Supporting protocol for Foundation Fieldbus | | No |
| Supporting protocol for EtherNet/IP | | No |
| Supporting protocol for AS-Interface Safety at Work | | No |
| Supporting protocol for DeviceNet Safety | | No |
| Supporting protocol for INTERBUS-Safety | | No |
| Supporting protocol for PROFIsafe | | No |
| Supporting protocol for SafetyBUS p | | No |
| Supporting protocol for other bus systems | | No |
| Width | mm | 90 |
| Height | mm | 200 |
| Depth | mm | 154 |

Approvals

| | | |
|--------------------------------------|--|---|
| Product Standards | | UL60947-4-1A; CSA-C22.2 No. 14-10; IEC60947-4-1; CE marking |
| UL File No. | | E123500 |
| UL Category Control No. | | NKJH |
| CSA File No. | | 12528 |
| CSA Class No. | | 3211-04 |
| North America Certification | | UL listed, CSA certified |
| Specially designed for North America | | No |

Dimensions

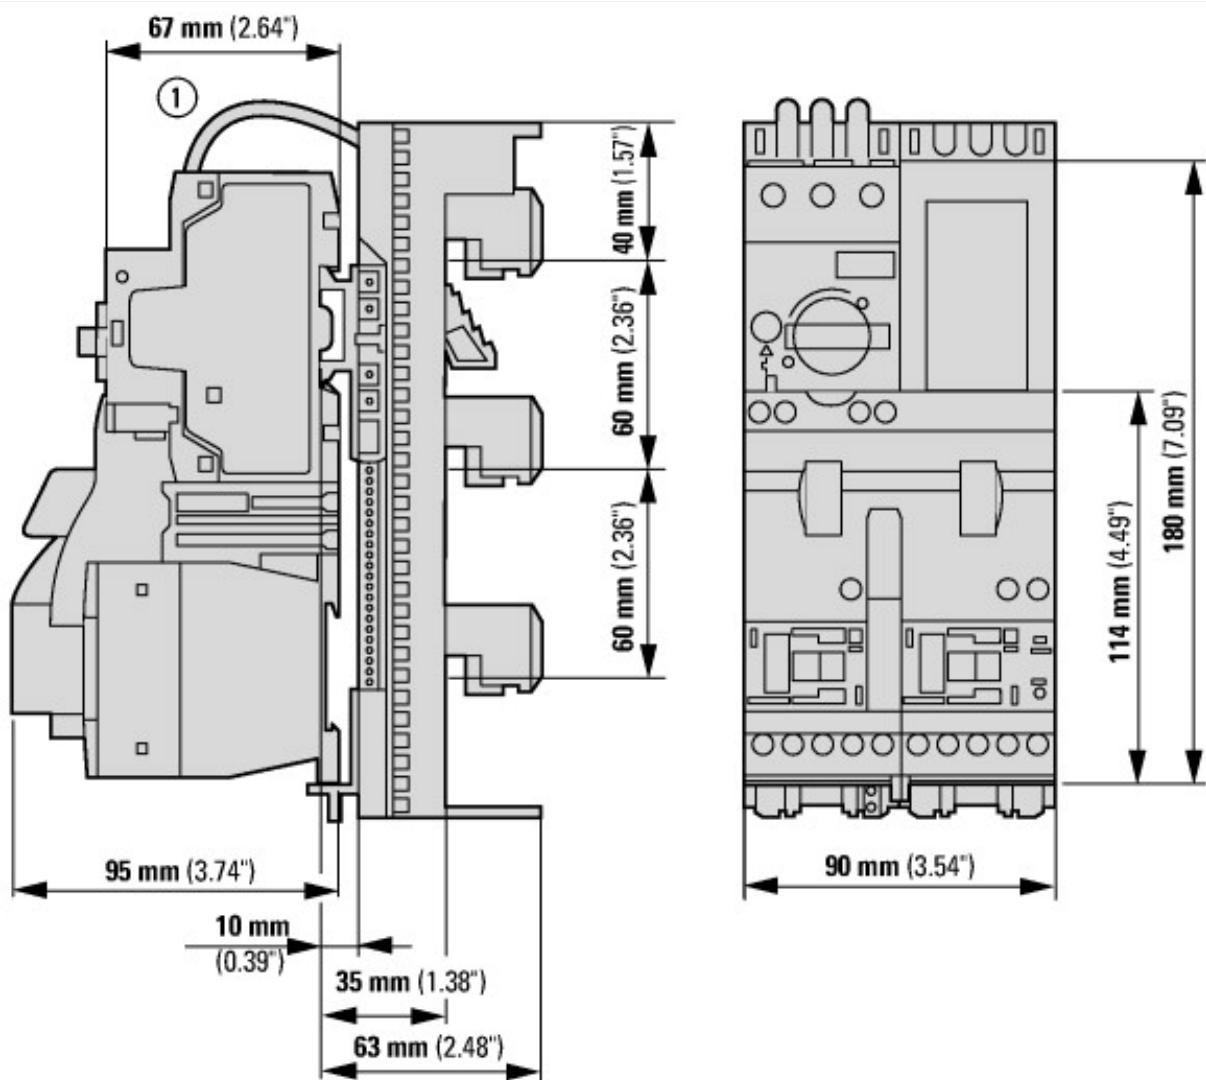

Assets (links)

Declaration of CE Conformity

00002885

Instruction Leaflets

IL03402006Z2018_04