

# PRODUCT DATASHEET

## P R50 60 36° 4.3 W/2700K E14

PARATHOM R50 | LED reflector lamps R50 with retrofit screw base



### AREAS OF APPLICATION

- Display cabinets and shop windows
- Museums, art galleries
- Exhibition rooms
- Hospitality
- Residential interiors
- As a downlight for marking walkways, doors, stairs, etc.
- Outdoor applications only in suitable luminaires

### PRODUCT BENEFITS

- Long lifetime of up to 15,000 h
- Low energy consumption
- Easy replacement of halogen lamps thanks to compact design
- Instant 100 % light, no warm-up time

### PRODUCT FEATURES

- Professional LED alternative to halogen lamps
- Mercury-free lamps



## TECHNICAL DATA

### Electrical data

Rated wattage	4.30 W
Nominal wattage	4.30 W
Nominal voltage	220...240 V
Claimed equiv. conventional lamp power	60 W
Max. lamp no. on circuit break. 10 A (B)	300
Max. lamp no. on circuit break. 16 A (B)	400
Operating frequency	50...60 Hz
Power factor $\lambda$	> 0.40



### Photometrical data

Nominal luminous flux	345 lm
Rated luminous flux	345 lm
Lumen main.fact.at end of nom.life time	0.70
Light color (designation)	Warm White
Color temperature	2700 K
Luminous flux	345 lm
Color rendering index Ra	≥80
Standard deviation of color matching	≤6 sdcn
Rated color temperature	2700 K
Color rendering index Ra	≥80
Nominal useful luminous flux 90°	345 lm
Rated useful luminous flux 90°	345 lm
Rated peak intensity	582 cd

### Light technical data

Beam angle	36 °
Warm-up time (60 %)	< 0.50 s
Starting time	< 0.5 s
Nominal beam angle	36 °
Rated beam angle (half peak value)	36.00 °

## Dimensions & weight



<b>Overall length</b>	85.0 mm
<b>Diameter</b>	53.5 mm
<b>Outer bulb</b>	T50
<b>Length</b>	85.0 mm
<b>Maximum diameter</b>	54.0 mm

## Temperatures & operating conditions

<b>Ambient temperature range</b>	-20...+40 °C
<b>Maximum temperature at tc test point</b>	84 °C

## Lifespan

<b>Nominal lamp life time</b>	15000 h
<b>Rated lamp life time</b>	15000 h
<b>Number of switching cycles</b>	100000

## Additional product data

<b>Base (standard designation)</b>	E14
<b>Mercury content</b>	0.0 mg
<b>Mercury-free</b>	Yes
<b>Show WEEE picto</b>	Yes
<b>Product remark</b>	All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

## Capabilities

<b>Dimmable</b>	No
-----------------	----



## Certificates & standards

Energy efficiency class	A+
Energy consumption	5 kWh/1000h

## Country-specific categorizations

Order reference	LEDPR5060 4,3W/
-----------------	-----------------

## Light Distribution

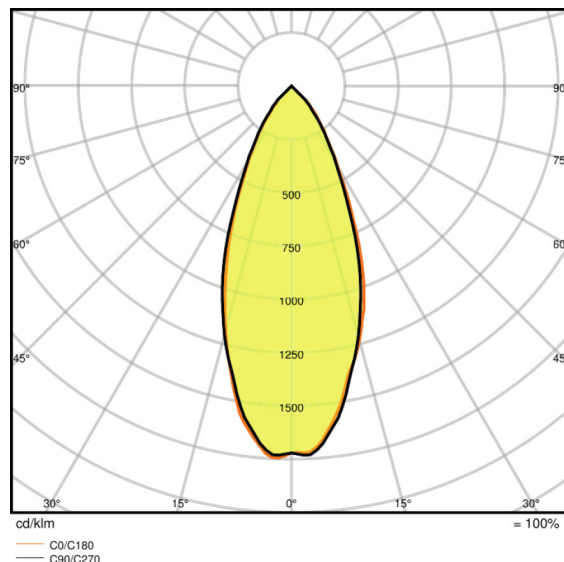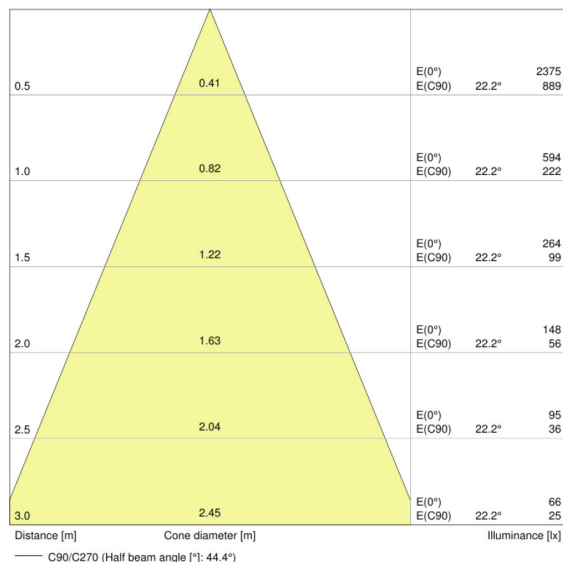

LDC typ cone

LDC typ polar

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075097261	Folding carton box 1	51 mm x 51 mm x 88 mm	84.00 g	0.23 dm <sup>3</sup>
4058075097278	Shipping carton box 10	267 mm x 111 mm x 102 mm	908.00 g	3.02 dm <sup>3</sup>
4058075264663	Folding carton box 1	51 mm x 51 mm x 88 mm	72.00 g	0.23 dm <sup>3</sup>
4058075264670	Shipping carton box 10	287 mm x 119 mm x 106 mm	836.00 g	3.62 dm <sup>3</sup>
4058075448520	Folding carton box 1	51 mm x 51 mm x 88 mm	72.00 g	0.23 dm <sup>3</sup>
4058075448537	Shipping carton box 10	287 mm x 119 mm x 106 mm	836.00 g	3.62 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

## REFERENCES / LINKS

For further products and actual information concerning LED lamps see

- ▶ [www.ledvance.com/ledlamps](http://www.ledvance.com/ledlamps)

For Guarantee see

- ▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

---

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.