



**Contactor, 380 V 400 V 37 kW, 2 N/O, 2 NC, RDC 24: 24 - 27 V DC, DC operation, Screw terminals**



**Part no.** DILM80-22(RDC24)  
**Catalog No.** 239463  
**Alternate Catalog No.** XTCE080F22TD  
**EL-Nummer (Norway)** 4110242

## Delivery program

|                      |  |  |                                                                                                                                                                                                                            |
|----------------------|--|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product range        |  |  | Contactors                                                                                                                                                                                                                 |
| Application          |  |  | Contactors for Motors                                                                                                                                                                                                      |
| Subrange             |  |  | Complete devices up to 170 A                                                                                                                                                                                               |
| Utilization category |  |  | AC-1: Non-inductive or slightly inductive loads, resistance furnaces<br>NAC-3: Normal AC induction motors: starting, switch off during running<br>AC-4: Normal AC induction motors: starting, plugging, reversing, inching |
| Connection technique |  |  | Screw terminals                                                                                                                                                                                                            |
|                      |  |  |                                                                                                                                                                                                                            |
| Notes                |  |  | Also suitable for motors with efficiency class IE3.<br>IE3-ready devices are identified by the logo on their packaging.                                                                                                    |

## Rated operational current

|                                                           |                |   |     |
|-----------------------------------------------------------|----------------|---|-----|
| AC-3                                                      |                |   |     |
| 380 V 400 V                                               | $I_e$          | A | 80  |
| AC-1                                                      |                |   |     |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz |                |   |     |
| Open                                                      |                |   |     |
| at 40 °C                                                  | $I_{th} = I_e$ | A | 110 |
| enclosed                                                  | $I_{th}$       | A | 80  |
| Conventional free air thermal current, 1 pole             |                |   |     |
| open                                                      | $I_{th}$       | A | 225 |
| enclosed                                                  | $I_{th}$       | A | 200 |

## Max. rating for three-phase motors, 50 - 60 Hz

|             |   |    |      |
|-------------|---|----|------|
| AC-3        |   |    |      |
| 220 V 230 V | P | kW | 25   |
| 380 V 400 V | P | kW | 37   |
| 660 V 690 V | P | kW | 63   |
| AC-4        |   |    |      |
| 220 V 230 V | P | kW | 11.5 |
| 380 V 400 V | P | kW | 20   |
| 660 V 690 V | P | kW | 26   |

## Contacts

|                       |  |  |       |
|-----------------------|--|--|-------|
| N/O = Normally open   |  |  | 2 N/O |
| N/C = Normally closed |  |  | 2 NC  |


## Instructions

|                   |  |  |                                                                                                          |
|-------------------|--|--|----------------------------------------------------------------------------------------------------------|
|                   |  |  | Contacts to EN 50 012.<br>integrated suppressor circuit in actuating electronics<br>with mirror contact. |
| Contact sequence  |  |  |                                                                                                          |
| Actuating voltage |  |  | RDC 24: 24 - 27 V DC                                                                                     |
| Voltage AC/DC     |  |  | DC operation                                                                                             |

## Technical data

### General

|           |  |  |                                 |
|-----------|--|--|---------------------------------|
| Standards |  |  | IEC/EN 60947, VDE 0660, UL, CSA |
|-----------|--|--|---------------------------------|
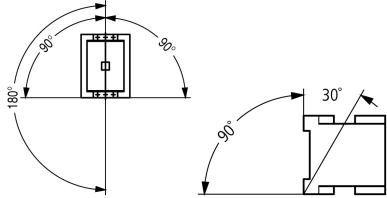
|                                                                       |                                     |                 |                                                                                    |
|-----------------------------------------------------------------------|-------------------------------------|-----------------|------------------------------------------------------------------------------------|
| Lifespan, mechanical                                                  |                                     |                 |                                                                                    |
| DC operated                                                           | Operations                          | $\times 10^6$   | 10                                                                                 |
| Operating frequency, mechanical                                       |                                     |                 |                                                                                    |
| DC operated                                                           | Operations/h                        |                 | 3600                                                                               |
| Climatic proofing                                                     |                                     |                 | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30     |
| Ambient temperature                                                   |                                     |                 |                                                                                    |
| Open                                                                  |                                     | °C              | -25 - +60                                                                          |
| Enclosed                                                              |                                     | °C              | - 25 - 40                                                                          |
| Storage                                                               |                                     | °C              | - 40 - 80                                                                          |
| Mounting position                                                     |                                     |                 |  |
| Mechanical shock resistance (IEC/EN 60068-2-27)                       |                                     |                 |                                                                                    |
| Half-sinusoidal shock, 10 ms                                          |                                     |                 |                                                                                    |
| Main contacts                                                         |                                     |                 |                                                                                    |
| N/O contact                                                           |                                     | g               | 10                                                                                 |
| Auxiliary contacts                                                    |                                     |                 |                                                                                    |
| N/O contact                                                           |                                     | g               | 7                                                                                  |
| N/C contact                                                           |                                     | g               | 5                                                                                  |
| Mechanical shock resistance (IEC/EN 60068-2-27) when tabletop-mounted |                                     |                 |                                                                                    |
| Half-sinusoidal shock, 10 ms                                          |                                     |                 |                                                                                    |
| Main contacts                                                         |                                     |                 |                                                                                    |
| N/O contact                                                           |                                     | g               | 10                                                                                 |
| Auxiliary contacts                                                    |                                     |                 |                                                                                    |
| N/O contact                                                           |                                     | g               | 7                                                                                  |
| N/C contact                                                           |                                     | g               | 5                                                                                  |
| Degree of Protection                                                  |                                     |                 | IP00                                                                               |
| Protection against direct contact when actuated from front (EN 50274) |                                     |                 | Finger and back-of-hand proof                                                      |
| Altitude                                                              |                                     | m               | Max. 2000                                                                          |
| Weight                                                                |                                     |                 |                                                                                    |
| DC operated                                                           |                                     | kg              | 2.1                                                                                |
| Screw connector terminals                                             |                                     |                 |                                                                                    |
| Terminal capacity main cable                                          |                                     |                 |                                                                                    |
| Flexible with ferrule                                                 |                                     | mm <sup>2</sup> | 1 x (10 - 70)<br>2 x (10 - 50)                                                     |
| Stranded                                                              |                                     | mm <sup>2</sup> | 1 x (16 - 70)<br>2 x (16 - 50)                                                     |
| Solid or stranded                                                     |                                     | AWG             | single 8...3/0, double 8...2/0                                                     |
| Flat conductor                                                        | Lamellenzahl<br>x Breite x<br>Dicke | mm              | 2 x (6 x 16 x 0.8)                                                                 |
| Stripping length                                                      |                                     | mm              | 24                                                                                 |
| Terminal screw                                                        |                                     |                 | M10                                                                                |
| Tightening torque                                                     |                                     | Nm              | 14                                                                                 |
| Tool                                                                  |                                     |                 |                                                                                    |
| Hexagon socket-head spanner                                           | SW                                  | mm              | 5                                                                                  |
| Terminal capacity control circuit cables                              |                                     |                 |                                                                                    |
| Solid                                                                 |                                     | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5)                                               |
| Flexible with ferrule                                                 |                                     | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5)                                               |
| Solid or stranded                                                     |                                     | AWG             | 18 - 14                                                                            |
| Stripping length                                                      |                                     | mm              | 10                                                                                 |
| Terminal screw                                                        |                                     |                 | M3.5                                                                               |

|                                                           |                |      |                                                    |
|-----------------------------------------------------------|----------------|------|----------------------------------------------------|
| Tightening torque                                         |                | Nm   | 1.2                                                |
| Tool                                                      |                |      |                                                    |
| Pozidriv screwdriver                                      |                | Size | 2                                                  |
| Standard screwdriver                                      |                | mm   | 0.8 x 5.5<br>1 x 6                                 |
| <b>Main conducting paths</b>                              |                |      |                                                    |
| Rated impulse withstand voltage                           | $U_{imp}$      | V AC | 8000                                               |
| Overvoltage category/pollution degree                     |                |      | III/3                                              |
| Rated insulation voltage                                  | $U_i$          | V AC | 690                                                |
| Rated operational voltage                                 | $U_e$          | V AC | 690                                                |
| Safe isolation to EN 61140                                |                |      |                                                    |
| between coil and contacts                                 |                | V AC | 690                                                |
| between the contacts                                      |                | V AC | 690                                                |
| Making capacity (p.f. to IEC/EN 60947)                    |                |      |                                                    |
|                                                           | $U_p$ to 690 V | A    | 1120                                               |
| Breaking capacity                                         |                |      |                                                    |
| 220 V 230 V                                               |                | A    | 800                                                |
| 380 V 400 V                                               |                | A    | 800                                                |
| 500 V                                                     |                | A    | 800                                                |
| 660 V 690 V                                               |                | A    | 650                                                |
| Short-circuit rating                                      |                |      |                                                    |
| Short-circuit protection maximum fuse                     |                |      |                                                    |
| Type “2” coordination                                     |                |      |                                                    |
| 400 V                                                     | gG/gL 500 V    | A    | 160                                                |
| 690 V                                                     | gG/gL 690 V    | A    | 160                                                |
| Type “1” coordination                                     |                |      |                                                    |
| 400 V                                                     | gG/gL 500 V    | A    | 250                                                |
| 690 V                                                     | gG/gL 690 V    | A    | 200                                                |
| <b>AC</b>                                                 |                |      |                                                    |
| AC-1                                                      |                |      |                                                    |
| Rated operational current                                 |                |      |                                                    |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz |                |      |                                                    |
| Open                                                      |                |      |                                                    |
| at 40 °C                                                  | $I_{th} = I_e$ | A    | 110                                                |
| at 50 °C                                                  | $I_{th} = I_e$ | A    | 98                                                 |
| at 55 °C                                                  | $I_{th} = I_e$ | A    | 94                                                 |
| at 60 °C                                                  | $I_{th} = I_e$ | A    | 90                                                 |
| enclosed                                                  | $I_{th}$       | A    | 80                                                 |
| Conventional free air thermal current, 1 pole             |                |      |                                                    |
| open                                                      | $I_{th}$       | A    | 225                                                |
| enclosed                                                  | $I_{th}$       | A    | 200                                                |
| AC-3                                                      |                |      |                                                    |
| Rated operational current                                 |                |      |                                                    |
| Open, 3-pole: 50 – 60 Hz                                  |                |      |                                                    |
| Notes                                                     |                |      | At maximum permissible ambient temperature (open.) |
| 220 V 230 V                                               | $I_e$          | A    | 80                                                 |
| 240 V                                                     | $I_e$          | A    | 80                                                 |
| 380 V 400 V                                               | $I_e$          | A    | 80                                                 |
| 415 V                                                     | $I_e$          | A    | 80                                                 |
| 440V                                                      | $I_e$          | A    | 80                                                 |
| 500 V                                                     | $I_e$          | A    | 80                                                 |
| 660 V 690 V                                               | $I_e$          | A    | 65                                                 |
| 380 V 400 V                                               | $I_e$          | A    | 80                                                 |
| Motor rating                                              | P              | kWh  |                                                    |
| 220 V 230 V                                               | P              | kW   | 25                                                 |

|                          |                |     |      |
|--------------------------|----------------|-----|------|
| 240V                     | P              | kW  | 27.5 |
| 380 V 400 V              | P              | kW  | 37   |
| 415 V                    | P              | kW  | 48   |
| 440 V                    | P              | kW  | 51   |
| 500 V                    | P              | kW  | 58   |
| 660 V 690 V              | P              | kW  | 63   |
| AC-4                     |                |     |      |
| Open, 3-pole: 50 – 60 Hz |                |     |      |
| 220 V 230 V              | I <sub>e</sub> | A   | 40   |
| 240 V                    | I <sub>e</sub> | A   | 40   |
| 380 V 400 V              | I <sub>e</sub> | A   | 40   |
| 415 V                    | I <sub>e</sub> | A   | 40   |
| 440 V                    | I <sub>e</sub> | A   | 40   |
| 500 V                    | I <sub>e</sub> | A   | 40   |
| 660 V 690 V              | I <sub>e</sub> | A   | 27   |
| Motor rating             | P              | kWh |      |
| 220 V 230 V              | P              | kW  | 11.5 |
| 240 V                    | P              | kW  | 13   |
| 380 V 400 V              | P              | kW  | 20   |
| 415 V                    | P              | kW  | 24   |
| 440 V                    | P              | kW  | 25   |
| 500 V                    | P              | kW  | 29   |
| 660 V 690 V              | P              | kW  | 26   |

## DC

|                                 |                |   |     |
|---------------------------------|----------------|---|-----|
| Rated operational current, open |                |   |     |
| DC-1                            |                |   |     |
| 60 V                            | I <sub>e</sub> | A | 110 |
| 110 V                           | I <sub>e</sub> | A | 110 |
| 220 V                           | I <sub>e</sub> | A | 70  |

## Current heat loss

|                                                   |  |    |      |
|---------------------------------------------------|--|----|------|
| 3 pole, at I <sub>th</sub> (60°)                  |  | W  | 11.4 |
| Current heat loss at I <sub>e</sub> to AC-3/400 V |  | W  | 9    |
| Impedance per pole                                |  | mΩ | 0.6  |

## Magnet systems

|                                                                                            |          |                   |                                                                                                                                                                                     |
|--------------------------------------------------------------------------------------------|----------|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Voltage tolerance                                                                          |          |                   |                                                                                                                                                                                     |
| DC operated                                                                                | Pick-up  | x U <sub>c</sub>  | 0.7 - 1.2                                                                                                                                                                           |
| Notes                                                                                      |          |                   | RDC 24 (U <sub>min</sub> 24 V DC/U <sub>max</sub> 27 V DC)<br>Example: U <sub>S</sub> = 0.7 x U <sub>min</sub> - 1.2 x U <sub>max</sub> / U <sub>S</sub> = 0.7 x 24V - 1.2 x 27V DC |
| DC operated                                                                                | Drop-out | x U <sub>c</sub>  | 0.15 - 0.6                                                                                                                                                                          |
| Notes                                                                                      |          |                   | at least smoothed two-phase bridge rectifier or three-phase rectifier                                                                                                               |
| Power consumption of the coil in a cold state and 1.0 x U <sub>S</sub>                     |          |                   |                                                                                                                                                                                     |
| DC operated                                                                                | Pick-up  | W                 | 90                                                                                                                                                                                  |
| DC operated                                                                                | Sealing  | W                 | 1.5                                                                                                                                                                                 |
| Duty factor                                                                                |          | % DF              | 100                                                                                                                                                                                 |
| Changeover time at 100 % U <sub>S</sub> (recommended value)                                |          |                   |                                                                                                                                                                                     |
| Main contacts                                                                              |          |                   |                                                                                                                                                                                     |
| DC operated                                                                                |          | ms                |                                                                                                                                                                                     |
| Closing delay                                                                              |          | ms                | 45                                                                                                                                                                                  |
| Opening delay                                                                              |          | ms                | 34                                                                                                                                                                                  |
| Arcing time                                                                                |          | ms                | 15                                                                                                                                                                                  |
| Permissible residual current with actuation of A1 - A2 by the electronics (with 0 signal). |          | mA                | ≤ 1                                                                                                                                                                                 |
| Lifespan, mechanical; Coil 50/60 Hz                                                        |          | x 10 <sup>6</sup> | Mechanical lifespan at 50 Hz approx. 30% lower than under “General”                                                                                                                 |

## Electromagnetic compatibility (EMC)

|                      |  |  |               |
|----------------------|--|--|---------------|
| Emitted interference |  |  | to EN 60947-1 |
|----------------------|--|--|---------------|

|                                       |  |      |                 |
|---------------------------------------|--|------|-----------------|
| Interference immunity                 |  |      | to EN 60947-1   |
| <b>Rating data for approved types</b> |  |      |                 |
| Switching capacity                    |  |      |                 |
| Maximum motor rating                  |  |      |                 |
| Three-phase                           |  |      |                 |
| 200 V<br>208 V                        |  | HP   | 25              |
| 230 V<br>240 V                        |  | HP   | 30              |
| 460 V<br>480 V                        |  | HP   | 60              |
| 575 V<br>600 V                        |  | HP   | 75              |
| Single-phase                          |  |      |                 |
| 115 V<br>120 V                        |  | HP   | 7.5             |
| 230 V<br>240 V                        |  | HP   | 15              |
| General use                           |  | A    | 125             |
| Auxiliary contacts                    |  |      |                 |
| Pilot Duty                            |  |      |                 |
| AC operated                           |  |      | A600            |
| DC operated                           |  |      | P300            |
| General Use                           |  |      |                 |
| AC                                    |  | V    | 600             |
| AC                                    |  | A    | 15              |
| DC                                    |  | V    | 250             |
| DC                                    |  | A    | 1               |
| Short Circuit Current Rating          |  | SCCR |                 |
| Basic Rating                          |  |      |                 |
| SCCR                                  |  | kA   | 10              |
| max. Fuse                             |  | A    | 600             |
| max. CB                               |  | A    | 600             |
| 480 V High Fault                      |  |      |                 |
| SCCR (fuse)                           |  | kA   | 30/100          |
| max. Fuse                             |  | A    | 300/300 Class J |
| SCCR (CB)                             |  | kA   | 65              |
| max. CB                               |  | A    | 250             |
| 600 V High Fault                      |  |      |                 |
| SCCR (fuse)                           |  | kA   | 30/100          |
| max. Fuse                             |  | A    | 300/300 Class J |
| SCCR (CB)                             |  | kA   | 30              |
| max. CB                               |  | A    | 350             |
| Special Purpose Ratings               |  |      |                 |
| Electrical Discharge Lamps (Ballast)  |  |      |                 |
| 480V 60Hz 3phase, 277V 60Hz 1phase    |  | A    | 100             |
| 600V 60Hz 3phase, 347V 60Hz 1phase    |  | A    | 100             |
| Incandescent Lamps (Tungsten)         |  |      |                 |
| 480V 60Hz 3phase, 277V 60Hz 1phase    |  | A    | 100             |
| 600V 60Hz 3phase, 347V 60Hz 1phase    |  | A    | 100             |
| Resistance Air Heating                |  |      |                 |
| 480V 60Hz 3phase, 277V 60Hz 1phase    |  | A    | 100             |
| 600V 60Hz 3phase, 347V 60Hz 1phase    |  | A    | 100             |
| Refrigeration Control (CSA only)      |  |      |                 |
| LRA 480V 60Hz 3phase                  |  | A    | 540             |
| FLA 480V 60Hz 3phase                  |  | A    | 90              |
| LRA 600V 60Hz 3phase                  |  | A    | 420             |
| FLA 600V 60Hz 3phase                  |  | A    | 70              |

|                                                           |    |      |  |
|-----------------------------------------------------------|----|------|--|
| Definite Purpose Ratings (100,000 cycles acc. to UL 1995) |    |      |  |
| LRA 480V 60Hz 3phase                                      | A  | 480  |  |
| FLA 480V 60Hz 3phase                                      | A  | 80   |  |
| Elevator Control                                          |    |      |  |
| 200V 60Hz 3phase                                          | HP | 20   |  |
| 200V 60Hz 3phase                                          | A  | 62.1 |  |
| 240V 60Hz 3phase                                          | HP | 25   |  |
| 240V 60Hz 3phase                                          | A  | 68   |  |
| 480V 60Hz 3phase                                          | HP | 50   |  |
| 480V 60Hz 3phase                                          | A  | 65   |  |
| 600V 60Hz 3phase                                          | HP | 60   |  |
| 600V 60Hz 3phase                                          | A  | 62   |  |

### Design verification as per IEC/EN 61439

|                                                                                                                        |                   |    |                                                                                                                                  |
|------------------------------------------------------------------------------------------------------------------------|-------------------|----|----------------------------------------------------------------------------------------------------------------------------------|
| Technical data for design verification                                                                                 |                   |    |                                                                                                                                  |
| Rated operational current for specified heat dissipation                                                               | I <sub>n</sub>    | A  | 80                                                                                                                               |
| Heat dissipation per pole, current-dependent                                                                           | P <sub>vid</sub>  | W  | 3                                                                                                                                |
| Equipment heat dissipation, current-dependent                                                                          | P <sub>vid</sub>  | W  | 9                                                                                                                                |
| Static heat dissipation, non-current-dependent                                                                         | P <sub>vs</sub>   | W  | 1.5                                                                                                                              |
| Heat dissipation capacity                                                                                              | P <sub>diss</sub> | W  | 0                                                                                                                                |
| Operating ambient temperature min.                                                                                     |                   | °C | -25                                                                                                                              |
| Operating ambient temperature max.                                                                                     |                   | °C | 60                                                                                                                               |
| IEC/EN 61439 design verification                                                                                       |                   |    |                                                                                                                                  |
| 10.2 Strength of materials and parts                                                                                   |                   |    |                                                                                                                                  |
| 10.2.2 Corrosion resistance                                                                                            |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.1 Verification of thermal stability of enclosures                                                               |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat                                             |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.4 Resistance to ultra-violet (UV) radiation                                                                       |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.5 Lifting                                                                                                         |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.2.6 Mechanical impact                                                                                               |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.2.7 Inscriptions                                                                                                    |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.3 Degree of protection of ASSEMBLIES                                                                                |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.4 Clearances and creepage distances                                                                                 |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.5 Protection against electric shock                                                                                 |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.6 Incorporation of switching devices and components                                                                 |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.7 Internal electrical circuits and connections                                                                      |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.8 Connections for external conductors                                                                               |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.9 Insulation properties                                                                                             |                   |    |                                                                                                                                  |
| 10.9.2 Power-frequency electric strength                                                                               |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.9.3 Impulse withstand voltage                                                                                       |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.9.4 Testing of enclosures made of insulating material                                                               |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.10 Temperature rise                                                                                                 |                   |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating                                                                                             |                   |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility                                                                                    |                   |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function                                                                                              |                   |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

### Technical data ETIM 7.0

|                                                                                                                                                                                       |   |       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|-------|
| Low-voltage industrial components (EG000017) / Power contactor, AC switching (EC000066)                                                                                               |   |       |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Contactor (LV) / Power contactor, AC switching (ecl@ss10.0.1-27-37-10-03 [AAB718015]) |   |       |
| Rated control supply voltage Us at AC 50HZ                                                                                                                                            | V | 0 - 0 |
| Rated control supply voltage Us at AC 60HZ                                                                                                                                            | V | 0 - 0 |

|                                                         |    |                  |
|---------------------------------------------------------|----|------------------|
| Rated control supply voltage $U_s$ at DC                | V  | 24 - 27          |
| Voltage type for actuating                              |    | DC               |
| Rated operation current $I_e$ at AC-1, 400 V            | A  | 110              |
| Rated operation current $I_e$ at AC-3, 400 V            | A  | 80               |
| Rated operation power at AC-3, 400 V                    | kW | 37               |
| Rated operation current $I_e$ at AC-4, 400 V            | A  | 40               |
| Rated operation power at AC-4, 400 V                    | kW | 20               |
| Rated operation power NEMA                              | kW | 44.7             |
| Modular version                                         |    | No               |
| Number of auxiliary contacts as normally open contact   |    | 2                |
| Number of auxiliary contacts as normally closed contact |    | 2                |
| Type of electrical connection of main circuit           |    | Screw connection |
| Number of normally closed contacts as main contact      |    | 0                |
| Number of main contacts as normally open contact        |    | 3                |

## Approvals

|                                      |  |                                                                          |
|--------------------------------------|--|--------------------------------------------------------------------------|
| Product Standards                    |  | IEC/EN 60947-4-1; UL 60947-4-1; CSA - C22.2 No. 60947-4-1-14; CE marking |
| UL File No.                          |  | E29096                                                                   |
| UL Category Control No.              |  | NLDX                                                                     |
| CSA File No.                         |  | 012528                                                                   |
| CSA Class No.                        |  | 2411-03, 3211-04                                                         |
| North America Certification          |  | UL listed, CSA certified                                                 |
| Specially designed for North America |  | No                                                                       |



- 1: Overload relay
- 2: Suppressor




on the side: 2 x DILM820-XHI11(V)-SI; 2 x DILM820-XHI11-SA




Squirrel-cage motor  
 Operating characteristics  
 Starting: from rest  
 Stopping: after attaining full running speed  
 Electrical characteristics  
 Make: up to 6 x rated motor current  
 Break: up to 1 x rated motor current  
 Utilization category  
 100 % AC-3  
 Typical applications

- Compressors
- Lifts
- Mixers
- Pumps
- Escalators
- Agitators
- Fans
- Conveyor belts
- Centrifuges
- Hinged flaps
- Bucket-elevators
- Air conditioning system
- General drives in manufacturing and processing machines

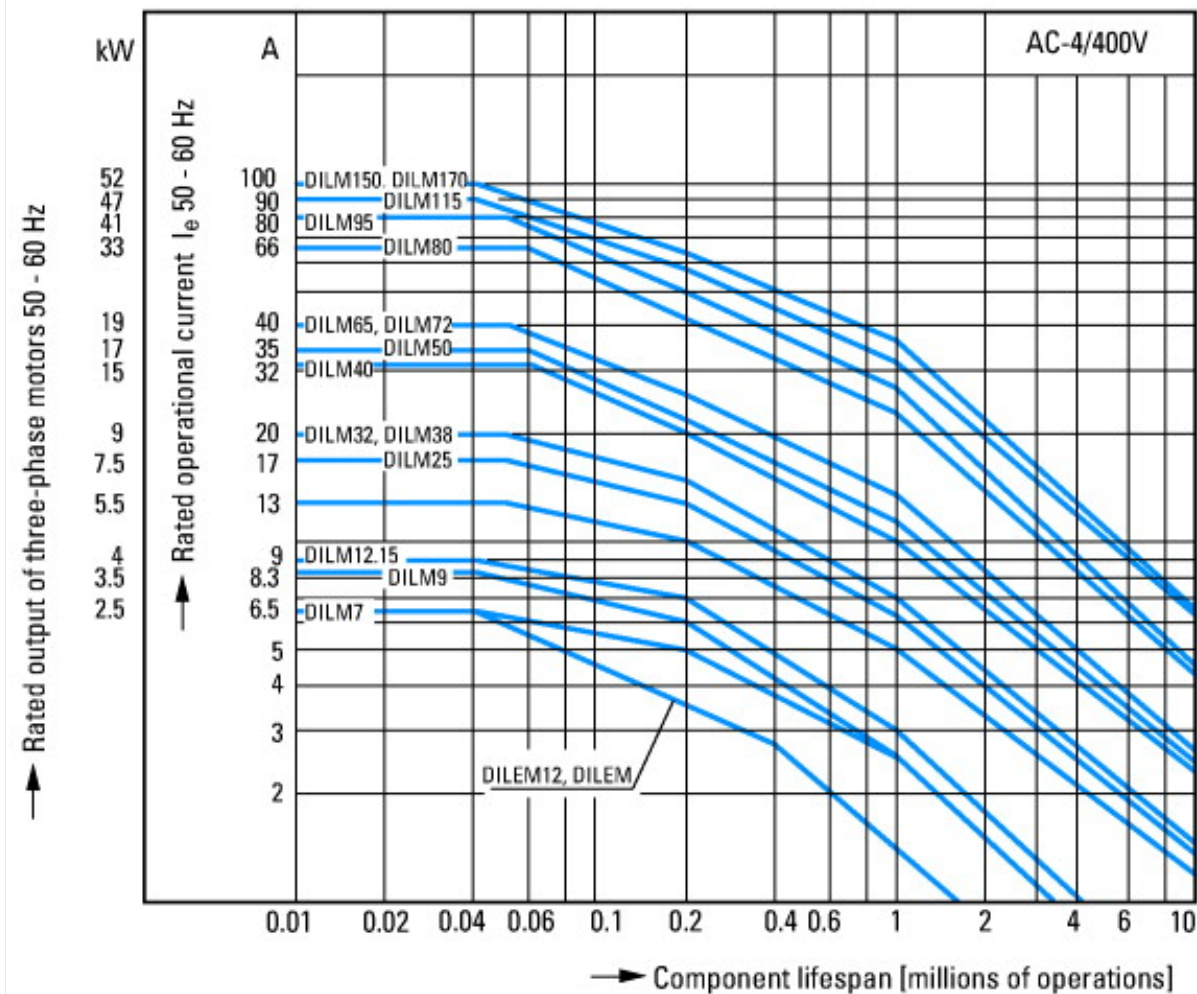


- Extreme switching duty
- Squirrel-cage motor
- Operating characteristics
- Inching, plugging, reversing
- Electrical characteristics
- Make: up to 6 x rated motor current
- Break: up to 6 x rated motor current
- Utilization category
- 100 % AC-4
- Typical applications
- Printing presses
- Wire-drawing machines
- Centrifuges
- Special drives for manufacturing and processing machines

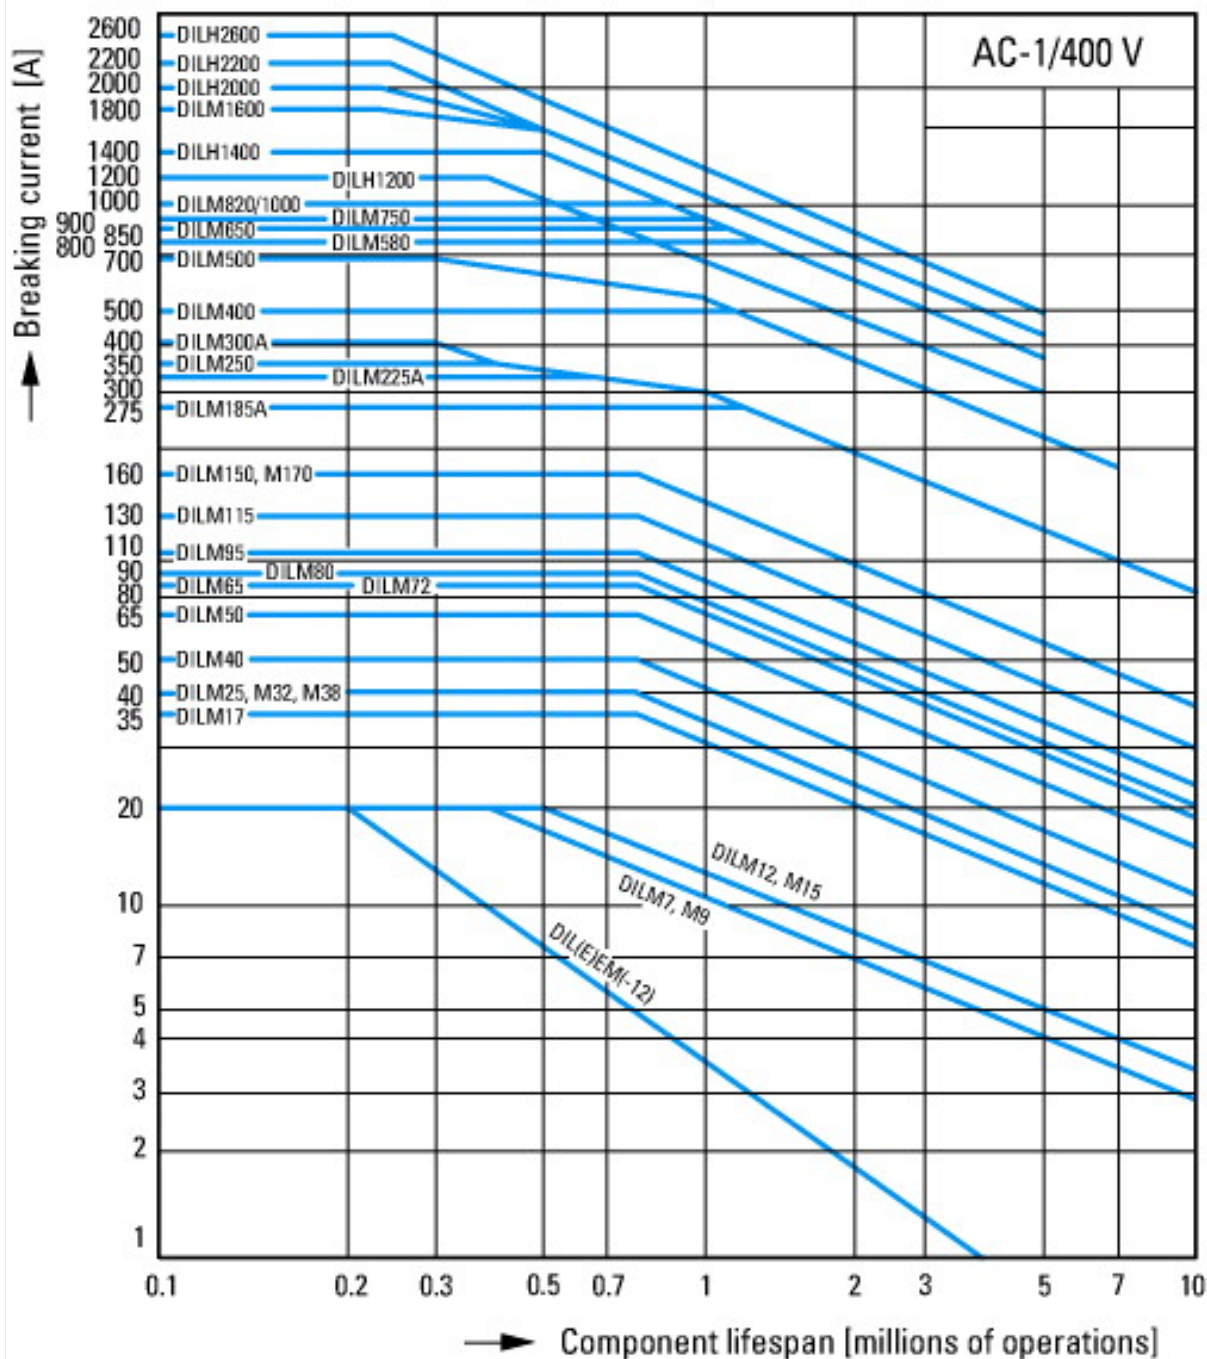


Switching conditions for 3 pole, non-motor loads  
 Operating characteristics  
 Non inductive and slightly inductive loads  
 Electrical characteristics  
 Switch on: 1 x rated operational current  
 Switch off: 1 x rated operational current  
 Utilization category  
 100 % AC-1  
 Typical examples of application  
 Electric heat



## Dimensions

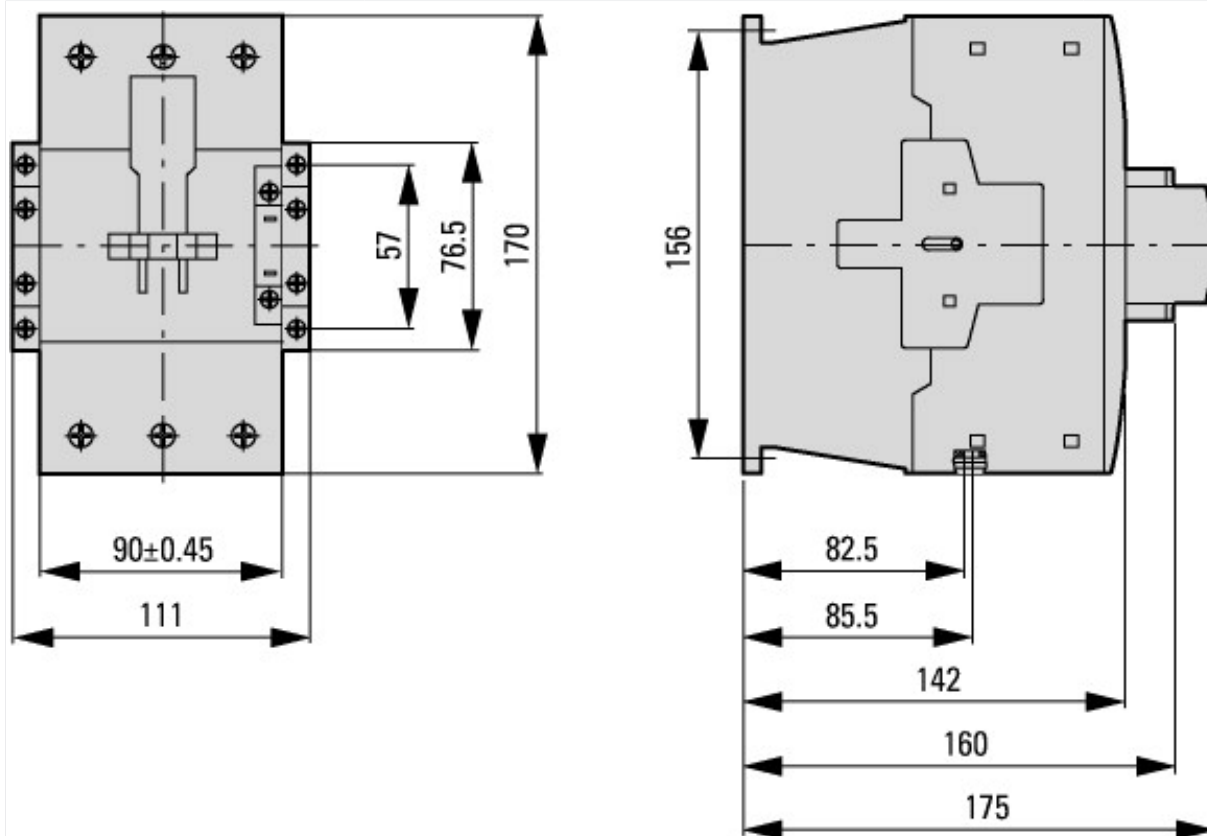

Contactor with auxiliary contact module

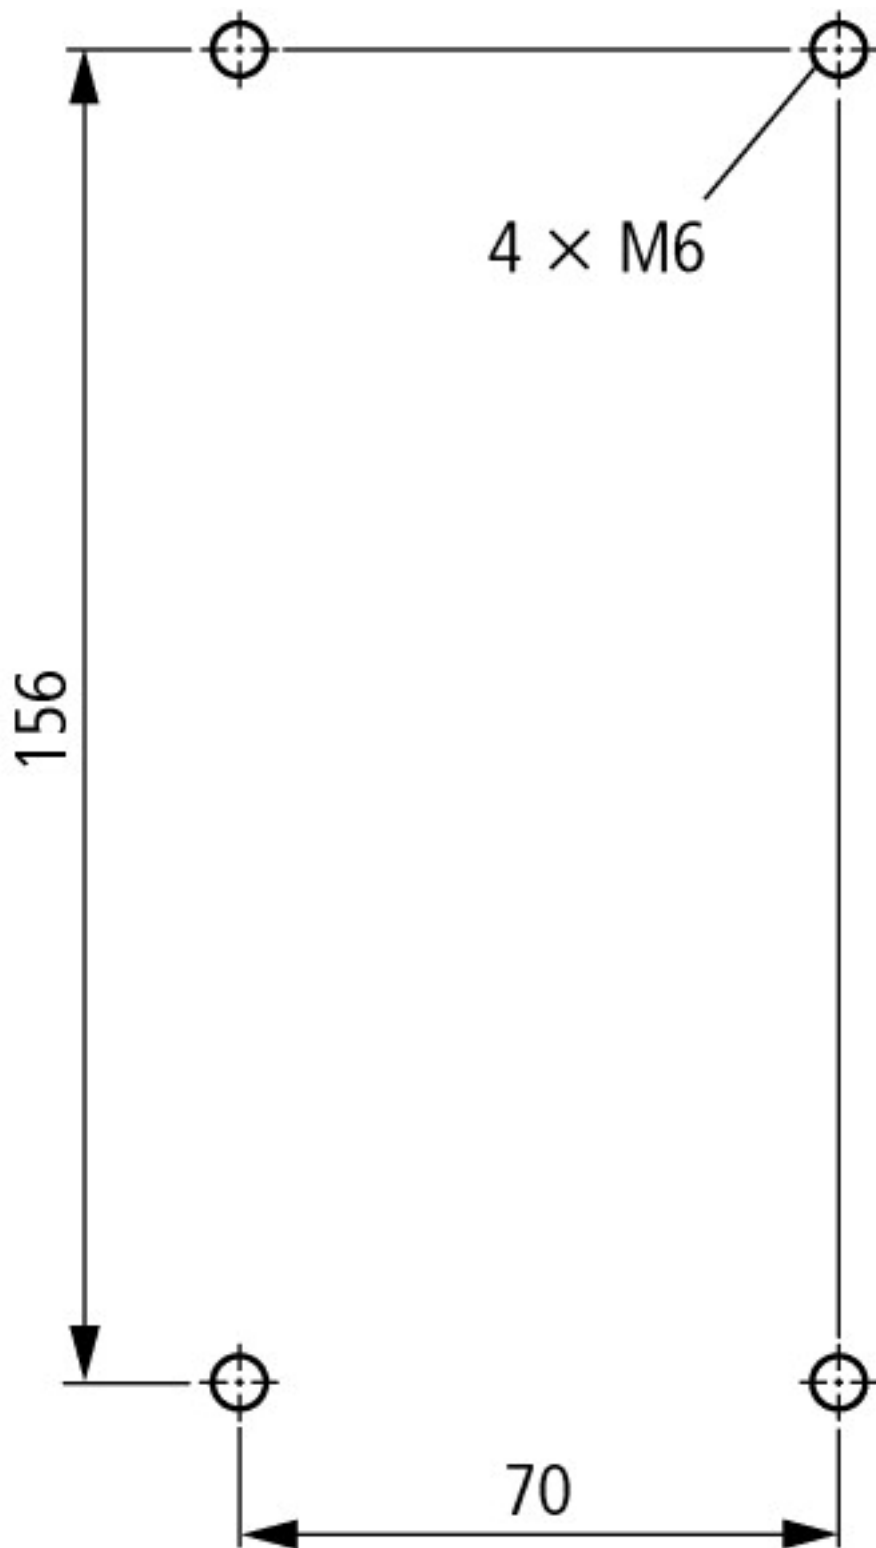

distance at side to earthed parts: 10 mm

DILM80...DILM170  
DILMC80...DILMC150  
DILMF80...DILMF150

## Assets (links)

### [Declaration of CE Conformity](#)

00003251

### [Instruction Leaflets](#)

IL03407039Z2019\_09