

53119001	DATA SHEET	
Valid from: 03.07.2018	SKINTOP® GMP-GL-M without collar	

The SKINTOP® GMP-GL-M without collar, a hexagonal locknut of polyamide, reinforced by glass fibre, is used when cable gland is attached in a through hole. When the cable gland is screwed in a thread, a higher protection against vibration can be obtained with this locknut.



Technical features:

Material	Polyamide, glass fibre reinforced UL94 V2
Sizes	M12x1.5 - M63x1.5 in acc. to EN 60423
Temperature range	-20 °C up to +100 °C
Colours	RAL 9005 (black) RAL 7001 (silver grey) RAL 7035 (light grey)

Approvals:



Norm references:




Note:

The SKINTOP® GMP-GL UL- approved only by use with the UL – approved SKINTOP® polyamide cable glands.

Creator: T. Dvoutely /PDP Released: DAMU1/PDP	Document: DB53119001EN Version: 04	Page 1 of 2
--	---------------------------------------	-------------

53119001	DATA SHEET	
Valid from: 03.07.2018	SKINTOP® GMP-GL-M without collar	

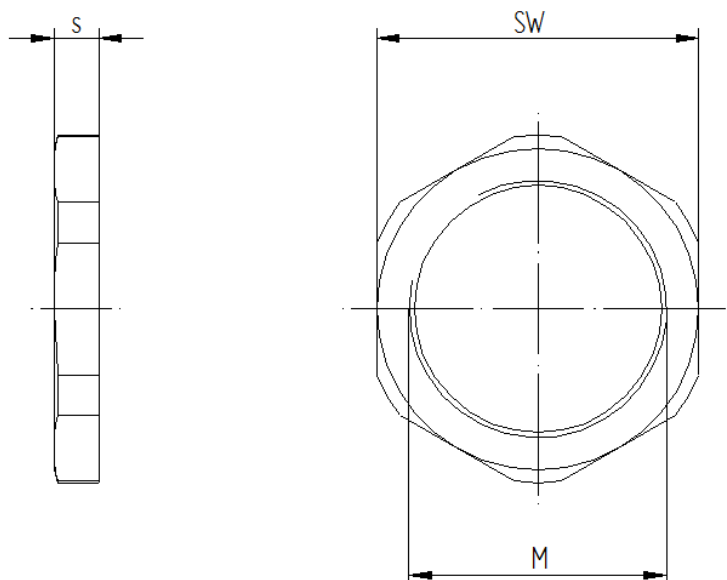

M	SW [mm]	s [mm]	Article No.		
			RAL 7035	RAL 7001	RAL 9005
M12x1,5	17	5,5	53119005	53119001	53119101
M16x1,5	22	5,5	53119015	53119011	53119111
M20x1,5	26	6,5	53119025	53119021	53119121
M25x1,5	32	7,0	53119035	53119031	53119131
M32x1,5	41	7,0	53119045	53119041	53119141
M40x1,5	50	7,0	53119055	53119051	53119151
M50x1,5	60	8,5	53119065	53119061	53119161
M63x1,5	75	8,5	53119075	53119071	53119171

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: T. Dvoutely /PDP Released: DAMU1/PDP	Document: DB53119001EN Version: 04	Page 2 of 2
--	---------------------------------------	-------------