


Simply Silent™ Contour C4

4"/100mm near-silent axial extract fans

The Simply Silent™ Contour range effectively eliminates humidity, condensation and odour to improve air quality in bathrooms, shower rooms, cloakrooms and toilets. They use advanced Ghost™ Air Movement Technology to deliver near-silent running. Suitable for wall, ceiling, panel and window fitting.

Key Features

- 2 speeds, selectable at install
- AC motor
- Backdraught shutter
- Extract performance (l/s) - 15/21
- Extract performance (m³/h) - 54/76
- Electrical power rating (W) - 6.3/7.0W
- Specific fan power (W/l/s) - 0.42/0.33
- Sound pressure level (dBA@3m) - 15/29
- IP rating: IPX4
- 2 year UK manufacturer warranty

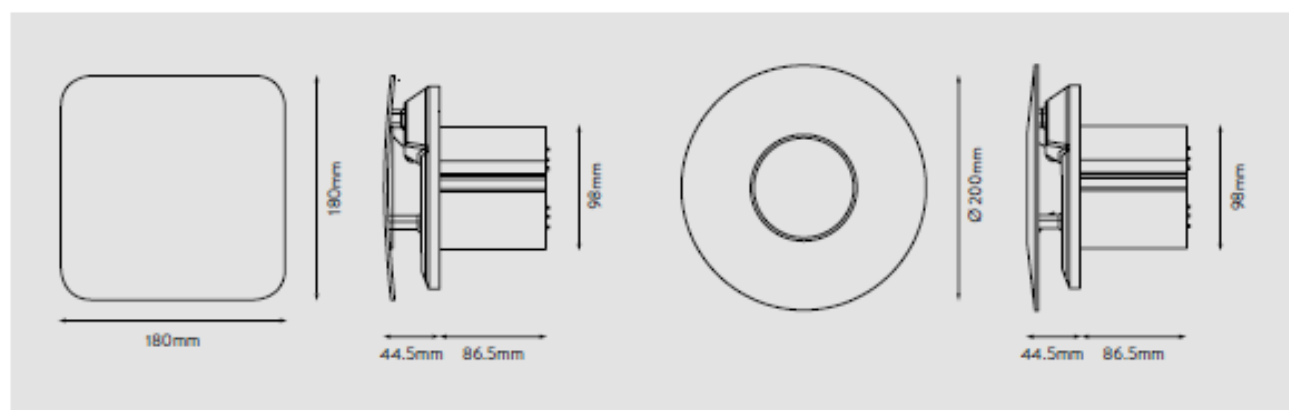

Product Selector		Design	Timer (adjustable from 30s – 30mins)	Pullcord	Humidistat (50-90% RH)
Model					
C4S	92960AW	■			
C4TS	92962AW	■	✓		
C4PS	92964AW	■		✓	
C4HTS	92966AW	■	✓		✓
C4R	92961AW	●			
C4TR	92963AW	●	✓		
C4PR	92965AW	●		✓	
C4HTR	92967AW	●	✓		✓


Simply Silent™ LV100

4"/100mm SELV axial extract fans complete with wall-fitting kit

The Simply Silent™ LV100 (Low Voltage) models are designed specifically for safe installation directly in or over the splash area Zone 1, offering complete peace of mind. These models are supplied with a 12V SELV transformer, positioned out of reach of any person using the bath or shower. The LV100 range has two speeds, selectable at install.

Key Features

- 2 speeds, selectable at install
- AC motor
- Suitable for wall, ceiling and window fitting (supplied with Simply Silent window kit plus)
- Extract performance (l/s) - 15/21
- Extract performance (m³/h) - 54/76
- Electrical power rating (W) - 5.5/11.8
- Specific fan power (W/l/s) - 0.37/0.56
- Sound pressure level (dBA@3m) - 22/34
- IP rating: IPX4
- 2 year UK manufacturer warranty

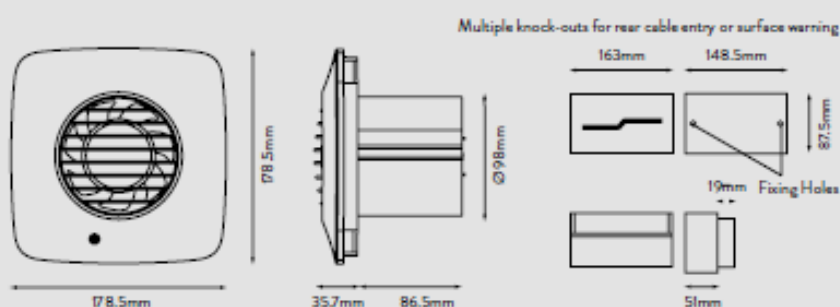

Product Selector		Design	Timer (adjustable from 30s ~30mins)	Pullcord	Humidstat (50-90% RH)	PIR	Wash kit
Model							
LV100S	93031AW	■					✓
LV100TS	93032AW	■	✓				✓
LV100PS	93033AW	■		✓			✓
LV100HTS	93034AW	■	✓		✓		✓
LV100HPTS	93035AW	■	✓	✓	✓		✓
LV100PIRS	93036AW	■				✓	✓


Simply Silent™ DX100 & DX100B

4"/100mm axial extract fans

The Simply Silent™ DX100 intermittent extract fan range is designed for those looking for something conventional, with a modern twist. Just like the entire Simply Silent™ family, these fans control humidity, odours and mould growth effectively in bathrooms, shower rooms, cloakrooms and toilets. The Simply Silent DX100 range features a grille-style fascia finished in cool white and available in round or square (DX100B square only). The range has two speeds, selectable at install. DX100 comes complete with wall fitting kit.

Key Features

- 2 speeds, selectable at install
- AC motor
- Suitable for wall, ceiling and window fitting (supplied with Simply Silent window kit plus)
- Extract performance (l/s) - 15/21
- Extract performance (m³/h) - 54/76
- Electrical power rating (W) - 6.0/6.7
- Specific fan power (W/l/s) - 0.40/0.32
- Sound pressure level (dBA@3m) - 22/34
- IP rating: IPX4
- 2 year UK manufacturer warranty

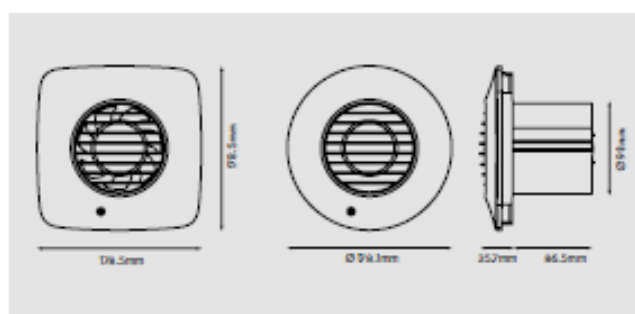

Product Selector		Design	Timer (adjustable from 30s – 30mins)	Pullcord	Humidistat (50-90% RH)	PIR
Model						
DX100S	93025AW	■				
DX100TS	93026AW	■	✓			
DX100PS	93027AW	■		✓		
DX100HTS	93028AW	■	✓		✓	
DX100HPTS	93029AW	■	✓	✓	✓	
DX100PIRS	93030AW	■	✓			✓
DX100R	93005AW	●				
DX100TR	93006AW	●	✓			
DX100PR	93007AW	●		✓		
DX100HTR	93008AW	●	✓		✓	
DX100HPTR	93009AW	●	✓	✓	✓	
DX100PIRR	93010AW	●	✓			✓
DX100BS	93017AW	■				
DX100BTS	93018AW	■	✓			
DX100BPS	93002AW	■		✓		
DX100BHTS	93019AW	■	✓		✓	
DX100BHPTS	93020AW	■	✓	✓	✓	

With Kit

* DX100B available in square only.


VX100 & VX120

4"/100mm and 5"/120mm axial extract fans

A range of easy to install single speed extract fans. Suitable for a wide range of applications including bathrooms, shower rooms and toilets. VX120 also suitable for utility rooms. Suitable for wall fitting, both VX100 and VX120 are available in standard and timer variants.

Key Features

- Single speed
- AC motor
- Wall mounted
- IP rating: IPX4
- 2 year UK manufacturer warranty

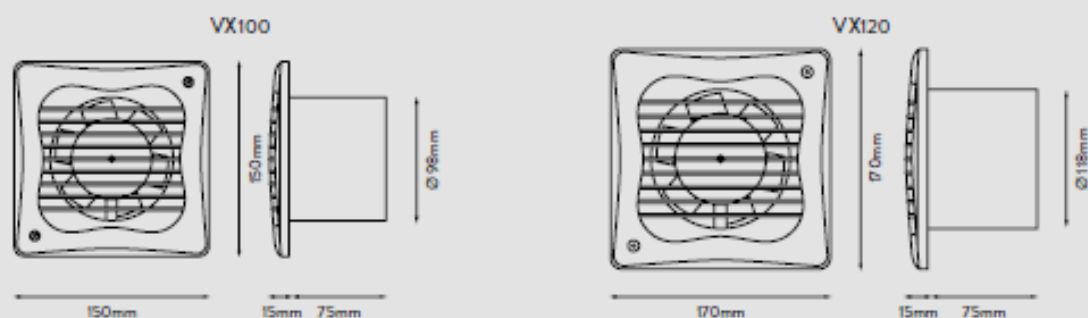

Product Selector		Extract Performance (l/s)	Extract Performance (m³/h)	Electrical Power Rating (W)	Specific Fan Power (SFP) (W/l/s)	Integral Timer	Timer (adjustable from 90s – 30mins)	Sound Pressure Level (dBA@3m)
Model								
VX100	93224AWW	18	66	14.2	0.79			37
VX100T	93225AWW	18	66	14.2	0.79	✓	✓	37
VX120	93228AWW	32	116	23	0.71			40
VX120T	93229AWW	32	116	23	0.71	✓	✓	40