


Excel Category 7A Cable S/FTP Dca LS0H 500m Reel - Yellow

Item Code: 100-910

excel
without compromise.

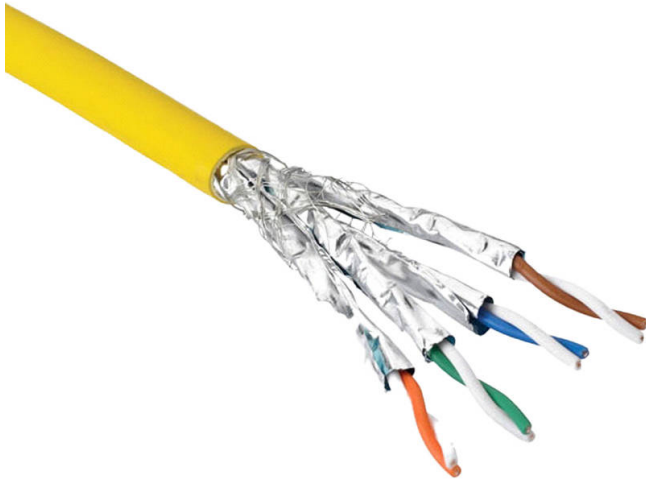

✕ Category 7A Performance to 1000 MHz

✕ Individual foil pairs with overall braid screen

✕ High performance design

✕ 25 year system warranty

✕ Sequential metre markings

✕ Euroclass Dca-s2-d2-a2

Product overview

The Excel Category 7A Screened S/FTP LS0H Cable is designed and manufactured to meet and exceed the ISO, CENELEC and TIA standards. This delivers Class FA link and channel performance supporting all applications detailed and proposed within the standards. This superior performance cable is ETL Component Verified.

Each cable consists of 4 pairs individually wrapped in a covering of high quality, strong, aluminium/polyester foil tape providing an individual screen for each pair. These sub units are then cabled together, with the pairs set to different lay lengths to ensure optimum performance, an overall braid screen is applied to provide further immunity to outside noise and to mitigate any risk of alien cross talk.

The print legend on the cable now includes information regarding the DOP number, Test and Classification of the cable for traceability.

Product specifications

Features	Values
Category	7A (IEC)
Overall screening	Braiding
Conductor screening	Foil
Outer sheath colour	Yellow
Reaction-to-fire class according to EN 13501-6	Dca
Smoke development class according to EN 13501-6	s2
Euro class flaming droplets/particles according to EN 13501-6	d2

Continued on the next page...


Excel Category 7A Cable S/FTP Dca LS0H 500m Reel - Yellow

Item Code: 100-910




Features	Values
Euro class acidity according to EN 13501-6	a2
AWG-size	23
Specification core insulation	PE
Core identification	Colour
Outer sheath material	Copolymer, thermoplastic (LS0H)
Diameter of conductor	0.58 mm
Halogen free (acc. EN 60754-1/2)	yes
Flame retardant	In accordance with EN 60332-1-2 and EN 50399
Low smoke (acc. BS EN 61034-2)	yes
Outer diameter approx.	7.8 mm
Operating Temperature Range	-25 to 70 °C
NVP value	70 %
Conductor category	Class 1 = solid
Total number of cores	8
Stranding element	Pairs
Conductor surface	Bare

Cross-section diagram

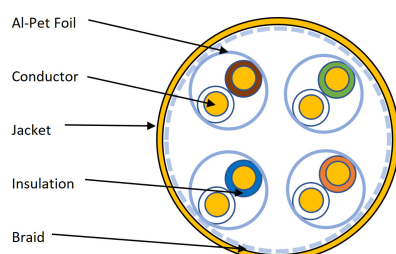

Single cable

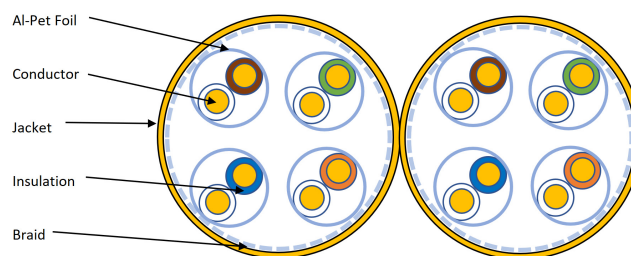

Dual cable

Excel Category 7A Cable S/FTP Dca LS0H 500m Reel - Yellow

Item Code: 100-910



Cable specifications

Features	Values
Dielectric strength	1200 V dc or 850 V ac
Maximum Pulling Load	60N/6.1KgF
MBR during installation	8x cable OD
MBR installed	4x cable OD

Standards

Applicable standard	Subject
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
IEC 61156-5:2009+AMD1:2012 CSV	Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - Horizontal floor wiring - Sectional specification
EN 50173-1:2011	Information technology. Generic cabling systems - General requirements
EN 50173-2:2007 + A1:2010	Information technology. Generic cabling systems - Office premises
BS EN 50288-3-1:2013	Multi-element metallic cables used in analogue and digital communication and controlSectional specification for unscreened cables characterised up to 100 MHz. Horizontal and building backbone cables
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
IEC 60332-1-2:2004	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
ANSI/TIA 568-2.D	Balanced Twisted-Pair Telecommunications Cabling and Components Standards
IEC 60754-2:2011	Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity
IEC 61034-2:2005+A1:2013	Measurement of smoke density of cables burning under defined conditions – Part 2: Test procedure and requirements
EN 50575:2014 + A1:2016	Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements

Continued on the next page...

Excel Category 7A Cable S/FTP Dca LS0H 500m Reel - Yellow

Item Code: 100-910



Applicable standard	Subject
RoHS	Restriction of Hazardous Substances - Compliant

Part number table

Part Number	Description
100-910	Excel Category 7A Cable S/FTP Dca LS0H 500m Reel - Yellow
100-911	Excel Category 7A Dual Cable S/FTP Dca LS0H 500m Reel - Yellow
190-910	Excel Category 7A Cable S/FTP B2ca LS0H 500m Reel - Yellow
190-910-VT	Excel Category 7A Cable S/FTP B2ca LS0H 500m Reel - Violet

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at sales@excel-networking.com



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.